



The VL-A series is a value-priced lineup of great-sounding reference monitors. The range includes the **VL-A4**, **VL-A5** and **VL-A8**, which are 4-inch, 5-inch and 8-inch two-way reference monitors.

Each of the models is self-powered and employs balanced TRS/XLR combo inputs. A deep-cabinet design with bass ports (front-mounted on the VL-A5 and VL-A8) extends the low end beyond similarly-priced units. High and low frequency controls on the VL-A5 and VL-A8 allow the user to tailor the monitors' response to their own studio.

The **LF-S8** subwoofer rounds out the lineup with an 8-inch ported design to extend the low end of the system.

VL-A8

- ▶ Two-way monitor
- ▶ 140 W active bi-amped design
- ▶ Direct radiating bass reflex 8-inch woofer with front-mounted port
- ▶ LF control adjusts response at 150 Hz or 800 Hz for room correction
- ▶ HF control adjusts response at 3 kHz or 8 kHz for room correction
- ▶ Low cut filter for use with optional LF-S8 subwoofer
- ▶ 1-inch dome tweeter
- ▶ Deep cabinet design and separated amplifier space for rich low frequency playback
- ▶ Magnetic shielding
- ▶ Frequency response (1 W, 1 m): 30 Hz – 21 kHz, ± 3 dB

LF-S8

- ▶ Subwoofer
- ▶ 50 W active design
- ▶ Direct radiating bass reflex 8-inch woofer with top air port
- ▶ Deep cabinet design for rich low frequency playback
- ▶ Low frequency cut control
- ▶ Cascade output for additional subwoofer
- ▶ Magnetic shielding
- ▶ Frequency response (1 W, 1 m): 30 Hz – 120 Hz, ± 3 dB

VL-A4

- ▶ Two-way monitor
- ▶ 35 W active bi-amped design
- ▶ Direct radiating bass reflex 4-inch woofer with rear air port
- ▶ 1-inch dome tweeter
- ▶ Deep cabinet design for rich low frequency playback
- ▶ Magnetic shielding
- ▶ Frequency response (1 W, 1 m): 90 Hz – 23 kHz, ± 3 dB

VL-A5

- ▶ Two-way monitor
- ▶ 90 W active bi-amped design
- ▶ Direct radiating bass reflex 5.25-inch woofer with front-mounted port
- ▶ LF control adjusts response at 150 Hz or 800 Hz for room correction
- ▶ HF control adjusts response at 3 kHz or 8 kHz for room correction
- ▶ Low cut filter for use with optional LF-S8 subwoofer
- ▶ 1-inch dome tweeter
- ▶ Deep cabinet design and separated amplifier space for rich low frequency playback
- ▶ Magnetic shielding
- ▶ Frequency response (1 W, 1 m): 38 Hz – 23 kHz, ± 3 dB



VL-A Series

Reference Monitors




VL-A4



VL-A5



VL-A8

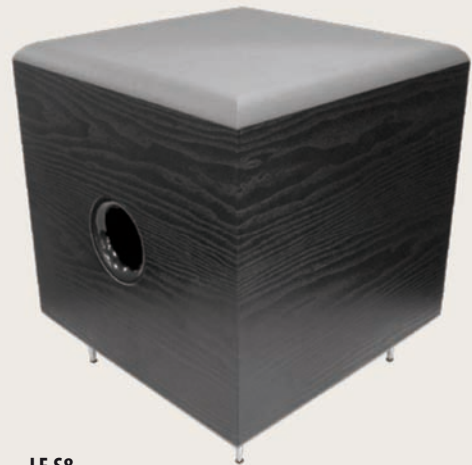

LF-S8

© 2008 TEAC Europe GmbH All Rights Reserved. All specifications are subject to change without notice.
All trademarks are property of their respective holders.
Visit www.tascam-europe.com or www.tascam.com for most up-to-date information.

www.tascam-europe.com

TASCAM Division, TEAC Europe GmbH, Bahnstr. 12, 65205 Wiesbaden, Germany

TEAC UK Ltd., Unit 19 & 20, The Courtyards, Hatters Lane, Watford, Hertfordshire WD18 8TE, UK

TASCAM 
MAKE IT HAPPEN