

TASCAM


D01461820B

FR-AV4

Linear PCM Recorder

Owner's Manual

V1.10

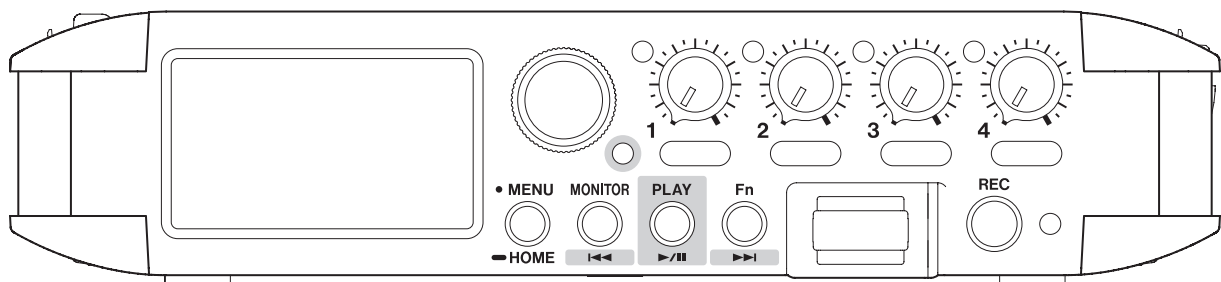

Quick Start Guide.....	6	1-1. Included items	24
Inserting SD cards.....	6	1-2. Accessories sold separately	24
Preparing the power supply	7	SD cards	24
Using AA batteries.....	7	Batteries	24
Using USB bus power.....	8	Using AC adapter.....	25
Turning the unit on and off.....	9	AK-BT2 Bluetooth® adapter overview.	25
Turning the power on	9	USB cables (for communication and data	
Turning the power off	9	transmission).....	25
Setting item selection	10	HDMI® cables (Ver. 2.1 recommended) ...	25
Set the date and time	11	Battery holder (BH-4AA)	25
Formatting (initializing) SD cards	12	1-3. Features	26
Home Screen	13	1-4. Conventions used in this manual.....	27
When recording/playback stopped	13	1-5. About SD cards.....	28
Connecting equipment	14	Note about formatting	28
Making input settings for each input.....	15	Write protection switches.....	28
Making various settings and monitor adjustments... 16		1-6. Precautions for placement and use.....	29
Enabling channels for input.....	16	1-7. Beware of condensation	29
Setting channels to record.....	16	1-8. Cleaning the unit.....	29
Setting input sources.....	16	1-9. About TASCAM customer support service... 29	
Setting mic power.....	17	2. Names and functions of parts	30
Using phantom power.....	17	2-1. Front panel.....	30
Setting plug-in power (EXT IN 3/4 jack)... 17		2-2. Left side panel	32
Setting input levels / Adjusting monitoring		2-3. Right side panel.....	33
volume	18	2-4. Top and bottom panels.....	34
Adjusting input levels	18	2-5. Rear panel	35
Adjusting the headphone output volume... 18		2-6. Basic operation.....	36
Recording.....	19	Opening the Menu Screen.....	36
Starting recording.....	19	Setting item selection	37
Stopping recording.....	19	Scrolling the screen	38
Playing recorded projects	20	Going back.....	39
Starting playback.....	20	Sliders	40
Stopping playback	21	Slider switches	41
Returning to the Home Screen.....	21	Selecting setting values	42
Synchronizing with timecode.....	22	Character input	43
Receiving timecode using a cable.....	22	Inputting numbers	44
Outputting timecode using a cable	22	Assigning the Fn button function	46
Synchronizing with a camera using HDMI®	23		

3. Preparation 47

- 3-1. Opening and closing the rear cover 47
- 3-2. Inserting and removing SD cards 47
 - Inserting SD cards 47
- 3-3. Preparing the power supply 48
 - Notes about power supplies 48
 - Using AA batteries 48
 - Using an AC adapter (sold separately) 49
 - Using USB bus power 49
- 3-4. Turning the unit on and off 50
 - Turning the power on 50
 - Turning the power off 50
- 3-5. Set the date and time 51
- 3-6. Formatting (initializing) SD cards 53
- 3-7. Home Screen 54
 - When stopped 54
 - When recording 57
 - When stopped, playing, paused or searching forward/backward (using the transport) 58
- 3-8. Mixer Screen 59

4. Connections 62

- 4-1. Mics 62
 - Connecting microphones 62
 - Connecting mics that use plug-in power . 62
 - Connecting mid-side mics 62
 - Connecting ambisonic microphones 62
 - Connecting other equipment 63
- 4-2. Cameras 64
 - Setting output for camera use 64
- 4-3. Cascade connection 65
- 4-4. Monitoring equipment 66
 - When using an external monitoring system to listen 66
 - When using headphones to listen 66
- 4-5. Computers and smartphones 67
 - Connecting to a computer using a USB cable 67
- 4-6. Connecting to a timecode transmitting device 68
 - Receiving timecode 68
 - Transmitting timecode 68
 - Timecode connection examples 69

5. Input and output settings 71

- 5-1. Making input settings for each input 71
 - Enabling channels for input 71
 - Setting channels to record 72
 - Setting input sources 72
 - Stereo linking 73
 - Locking input levels 73
 - Using phantom power 74
 - Setting plug-in power 75
 - Compensating for delay between different mic distances 75
 - Setting the low-cut filter 76
 - Setting the limiter 76
 - Setting the equalizer 76
 - Setting the noise gate 78
 - Inverting the input phase 78
 - Changing the channel being set on the Input Setting Screen 78
- 5-2. Saving and recalling input settings 79
 - Saving input settings 79
 - Recalling input settings 80
- 5-3. Adjusting input levels 80
- 5-4. Output settings 81
 - Selecting the headphone volume knob function 81
 - OUTPUT 81
 - Adjusting the output volume 81
 - LIMITER 82
 - DELAY 82
- 5-5. OTHER SETTINGS 83
 - Setting the GANG operation mode 83
 - GANG functions 83
 - Setting input level operation mute 84
 - Fixing input levels while recording 84
- 5-6. Using the mid-side decoding function ... 85
 - Connection settings 85
 - Adjusting mid and side levels 85
- 5-7. Outputting audio from this unit using HDMI® 86

6. Recording 87


- 6-1. Starting recording 87
- 6-2. Stopping recording 87

7. Recording settings	88	10. Mark functions	104
7-1. Monitoring each input	88	10-1. Mark types	104
Saving monitoring settings	89	10-2. Adding marks	104
Recalling monitoring settings	89	Adding marks at regular intervals	104
Initializing monitoring settings	89	Adding marks when peak levels occur...104	
7-2. Changing the recording file format	90	Adding marks manually	105
Simultaneous recording of mix files in WAV		10-3. Jumping to set marks	105
and MP3 formats (dual format function) ...	90	10-4. Deleting marks	105
7-3. Capturing sound before recording starts ...	91	10-5. Opening the mark list	105
7-4. Recording file naming	91	11. Camera functions	106
7-5. Designating the folder used for recordings ...	91	11-1. Setting output for camera use	106
8. Playback	92	11-2. Adding slate tones	106
8-1. Playing files	92	11-3. Using the auto tone function	107
8-2. Stopping playback	93	Auto tone function	107
Returning to the Home Screen	93	Adjusting the tone level	107
8-3. Screen overview	94	Oscillator function	107
8-4. Starting and pausing playback	94	12. USB connection	108
8-5. Changing the playback position	94	12-1. Exchanging files with computers	108
8-6. Selecting files for playback	95	Setting this unit for use as a card reader ...	108
8-7. Searching backward and forward	95	Transferring files	108
9. File operations	96	Disconnecting from a computer	108
9-1. File name overview	96	12-2. Connecting with iOS devices	109
Changing how files are named	97	12-3. Using the ASIO driver	109
Setting the file number	97	12-4. Using as an audio interface	110
9-2. File and project structure overview	98	FR-AV4 USB audio channel assignments ...	110
Folders	98	Inputting sound to the computer using the	
Recording data	98	unit inputs	111
9-3. Project overview	98	Mixing the computer output into the unit	
9-4. Folder hierarchy example	99	master track	111
9-5. Using the BROWSE Screen	99	Using the computer output as sound input	
9-6. Folder operations	100	to this unit	112
Screen overview	100	13. Remote control functions	113
Moving between folders	100	13-1. Installing the dedicated controller app ..	113
Quick file playback	100	13-2. Installing a Bluetooth® adapter	114
Folder menu	101	13-3. Connecting with the dedicated control app ...	115
Creating folders	101	13-4. Wireless timecode synchronization with	
9-7. File and project operations	102	supported Atomos products	116
File menu	102	Connecting with supported Atomos	
Current project	102	products	116
Viewing mark lists	102	Using remote control while timecode is	
Deleting marks	102	running free	118
9-8. Setting where recording projects are saved ...	103		

14. Timecode functions	119	17. Firmware version upgrade changes	139
14-1. FRAME RATE	119	17-1. FR-AV4 V1.10 overview	139
14-2. MASTER	119	AUTO MIXER function overview	139
Receiving timecode through the TC IN jack. .	120	Using the AUTO MIXER function	139
Receiving timecode by Bluetooth®	120	Checking auto mixer status	140
Receiving timecode by HDMI®	120	Fader operation on the Mixer Screen . .	140
14-3. Timecode settings	121	18. Messages	141
14-4. TC MODE	122	19. Troubleshooting	144
14-5. COUNTER VIEW	122	20. Specifications	147
14-6. Outputting timecode	123	20-1. Specifications and ratings	147
14-7. Timecode information	123	Recorder specifications	147
15. Wireless audio monitoring functions	124	Analog audio input ratings	147
15-1. Wireless audio monitoring	124	Analog audio output ratings	148
15-2. Pairing	124	TC IN/OUT jack	148
15-3. Adjusting the volume	125	HDMI® IN/OUT ports	148
15-4. Connecting with already paired devices. .	126	USB	148
15-5. Deleting pairing data	127	USB Audio	148
15-6. Quality settings	128	Bluetooth® adapter connector	148
16. Various settings	129	Audio performance	149
16-1. Using a 2D code to access the Owner's		Recording times (in hours: minutes) . . .	149
Manual web page	129	Operating system and other requirements . .	150
16-2. Showing various information	129	Other	150
16-3. Resetting the date and time	130	20-2. Dimensional drawings	153
16-4. Resetting the unit to its factory defaults. .	130	21. Trademarks	154
16-5. Formatting SD cards	130		
16-6. Using the automatic power saving function. .	130		
16-7. Ambisonic mode	131		
16-8. Selecting the power source	132		
16-9. Setting the AA battery type	132		
16-10. Saving and recalling user settings	132		
16-11. Power saving (energy conservation) mode . .	133		
16-12. Adjusting the display contrast	133		
16-13. Setting peak hold time	133		
16-14. Menu items	134		
Structure of the Menu Screen	134		
Menu details	135		

Quick Start Guide

Inserting SD cards

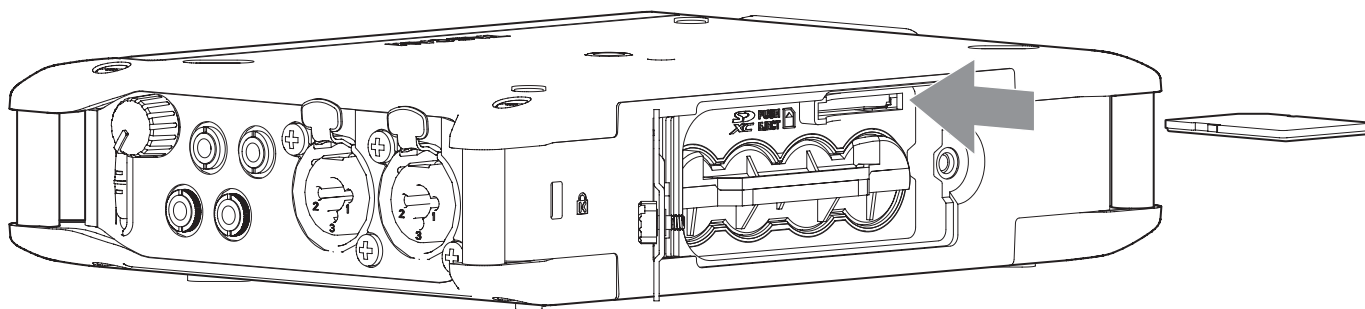


Open the back cover and insert an SD card into the slot as shown in the illustration until it clicks into place. To remove an SD card, press it in gently and then pull it out.


Preparing the power supply

Using AA batteries

1. Open the rear cover and remove the battery holder.

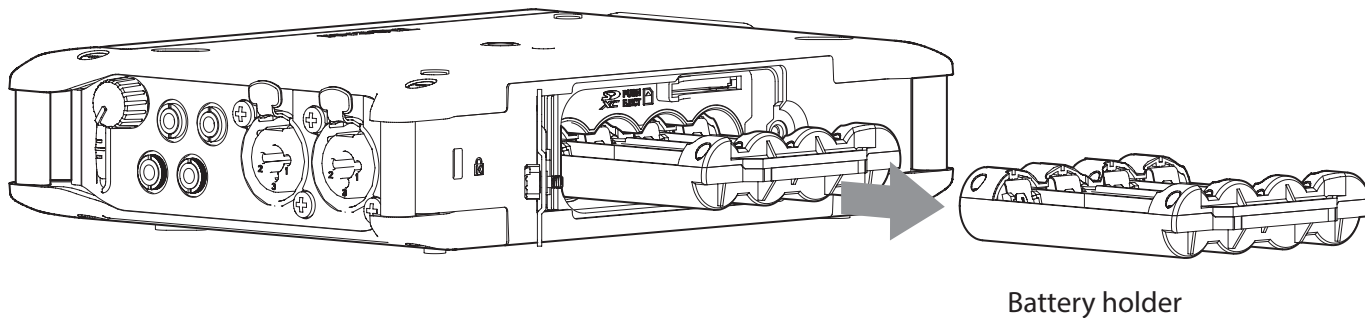


2. Install batteries with their \oplus and \ominus marks as shown in the battery holder. Then, reinstall the case in the unit.

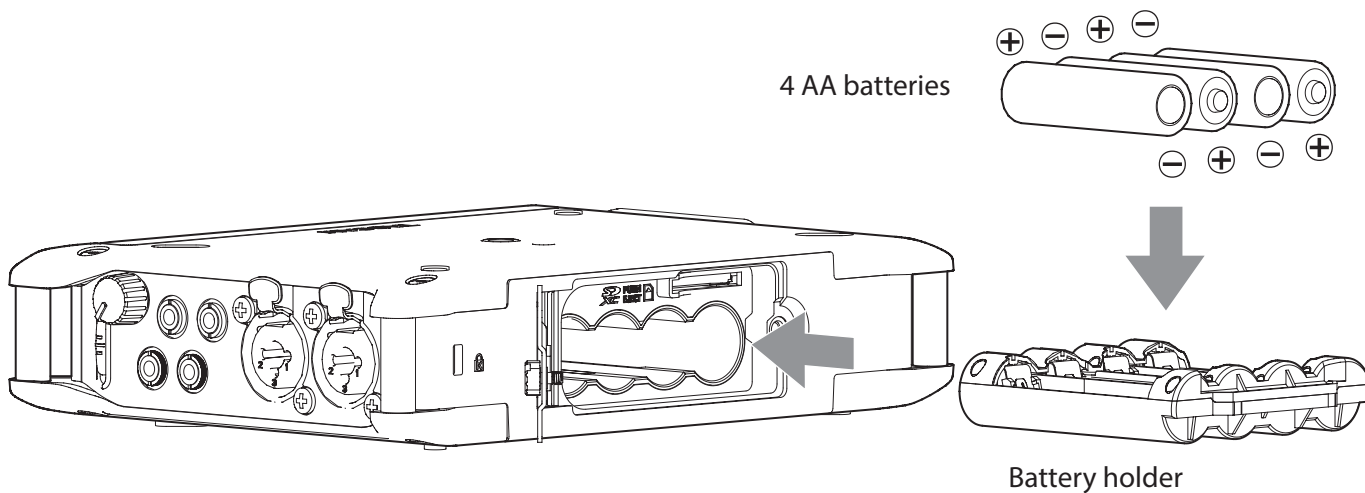

3. Close the back cover and tighten the screw.

Using USB bus power

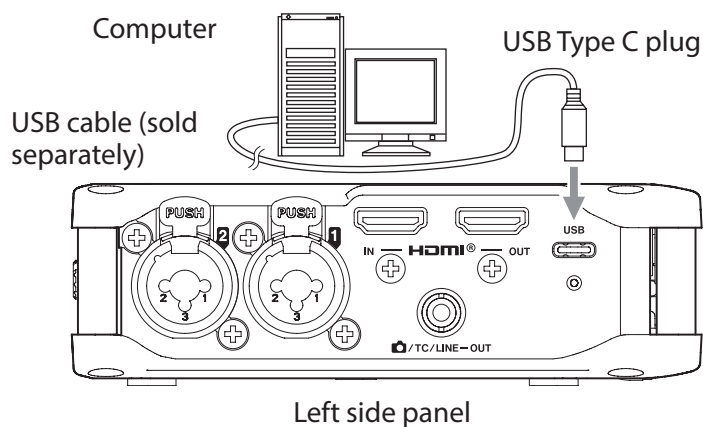

NOTE

- See “3-3. Preparing the power supply” on page 48 for details about power supplies.
- If a computer is going to be used only to supply power, a driver does not need to be installed.
- Use a cable that supports data transmission to connect with the USB port of a computer or another device.
- We recommend connecting it to a USB Type-C port on a computer or other device.


Turning the unit on and off

⚠ CAUTION

- Turn down the volume of the sound system connected to the unit before starting up or shutting down the unit.
- Do not wear connected headphones when turning the unit on and off. Noise could damage the headphone driver unit or harm your hearing.

Turning the power on

Right side panel

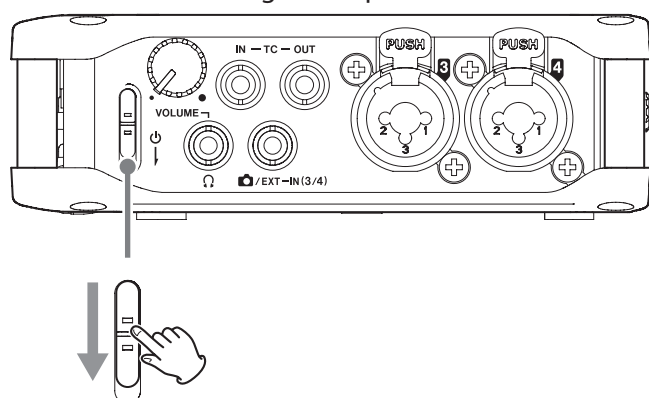


TASCAM
FR-AV4

Release the switch after the start up screen appears.

Turning the power off


Right side panel

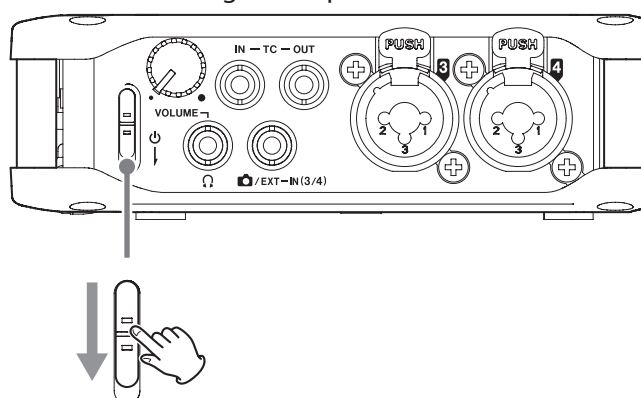

POWER OFF

Release the switch after the POWER OFF screen appears.

CAUTION

Always use the  switch to turn the unit off. If the unit is not able to conduct shutdown procedures properly, recording data, settings and other changes could be lost. Lost data and settings cannot be restored.

NOTE


The unit cannot be turned off when it is recording.

Setting item selection

Using the touchscreen


Select

Scroll the screen.

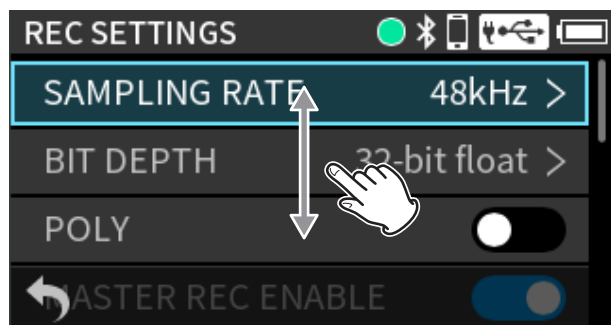

Confirm



Tap the desired setting item.

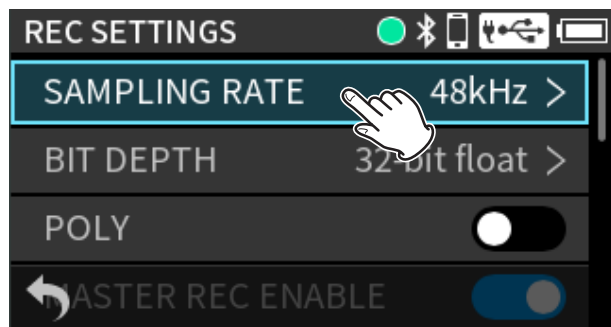

Using the DATA dial


Select

Turn the DATA dial to highlight the desired item.

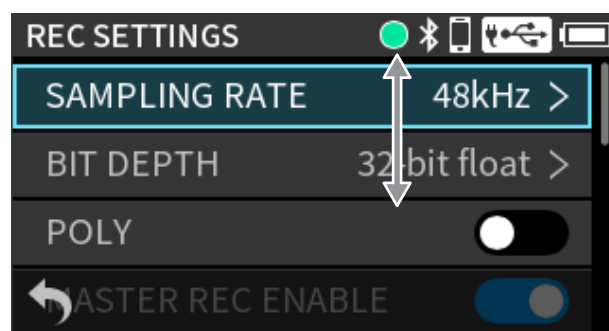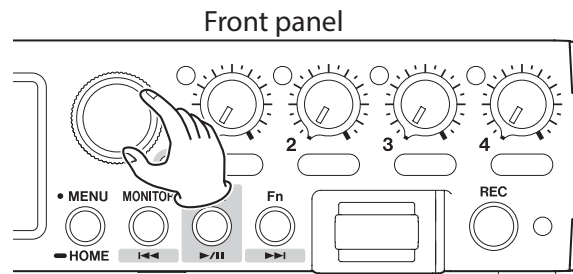

Confirm

Press the DATA dial to confirm.

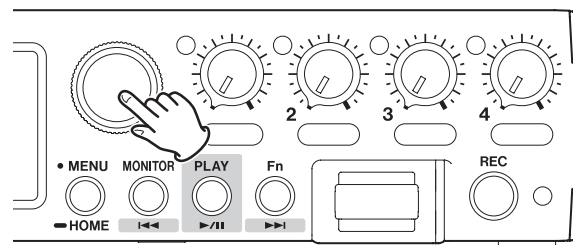


TIP


By pressing the DATA dial while turning it, cursor movement and parameter adjustment can be accelerated.

Set the date and time

Whenever the date and time have been reset, the DATE/TIME Screen will open.

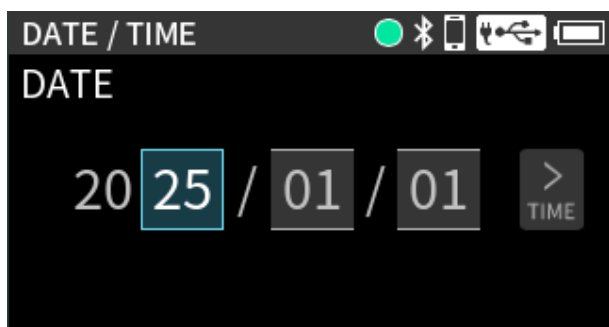

After setting the date and time, tap "SET" to confirm.

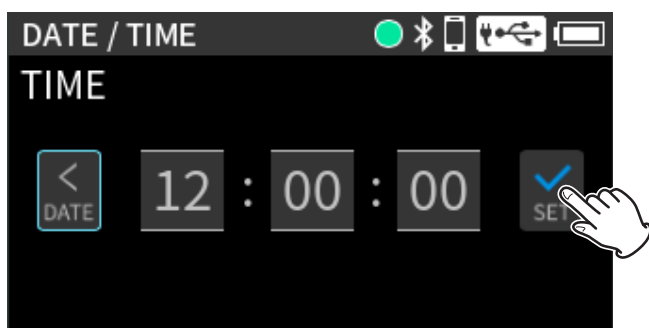


Formatting (initializing) SD cards

SD cards must be formatted by this unit before they can be used with it.

The following message will appear if an unformatted card is loaded.

Tap the OK button to start quick formatting.

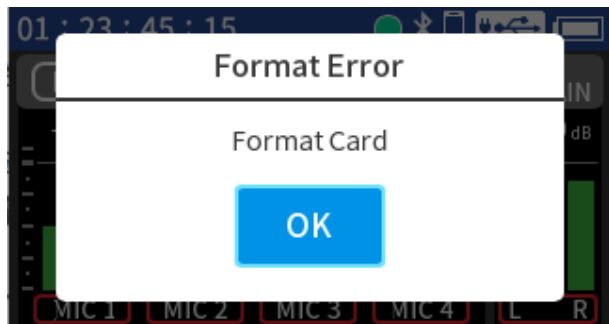


After formatting completes, the Home Screen will open.


The following setting item can also be used for formatting.

MENU > FORMAT SD

1. Tap "QUICK FORMAT" or "ERASE FORMAT".

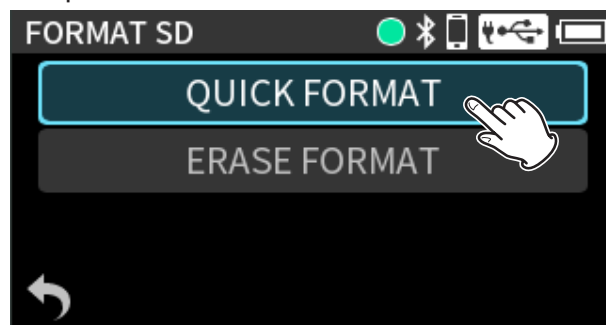

2. Tap the "YES" button.

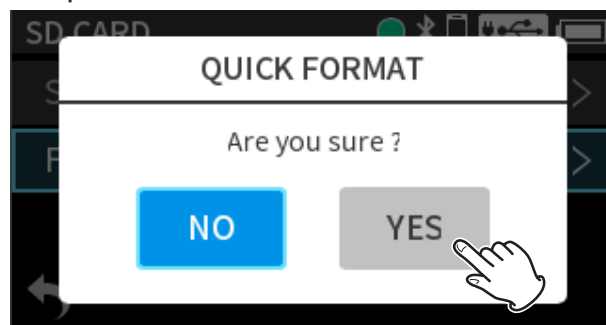

CAUTION


Formatting will erase all the data on the SD card. Back up to a computer, for example before formatting a card.

NOTE

- Using the "ERASE FORMAT" option might improve writing performance that has decreased due to repeated use. If "Write Timeout" or "Card slow Check BOF MARK" messages appear during recording, format the card with "ERASE FORMAT".
- ERASE FORMAT takes more time than QUICK FORMAT.


Home Screen

When recording/playback stopped

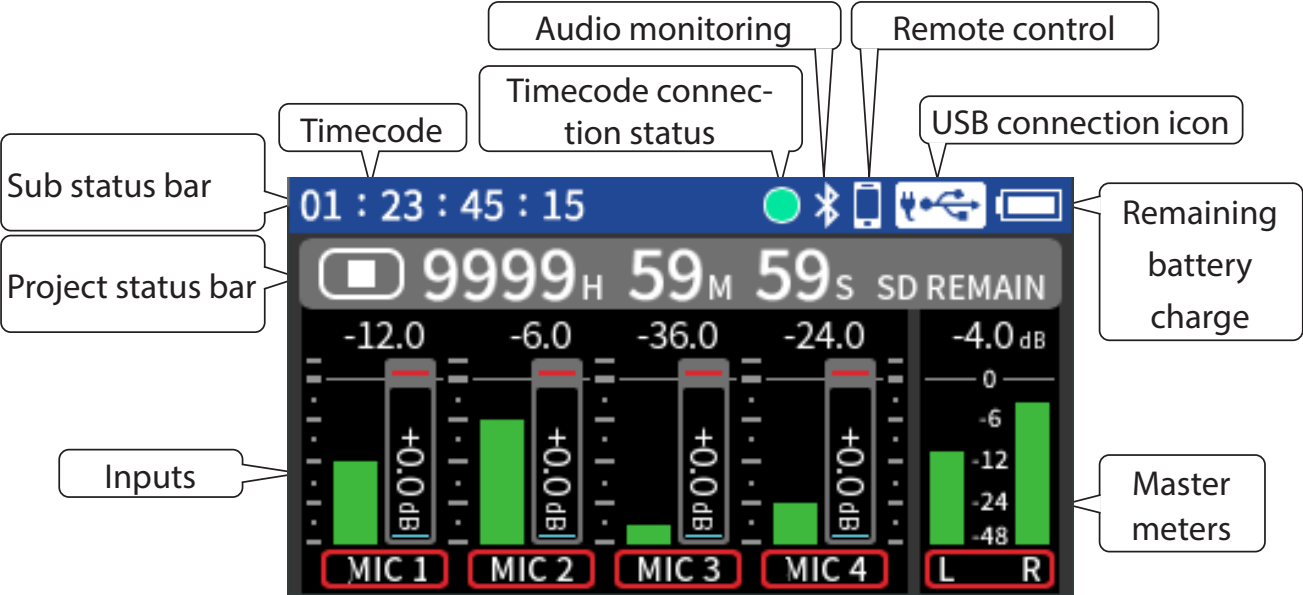

Connecting equipment


Up to 4 inputs can be recorded.

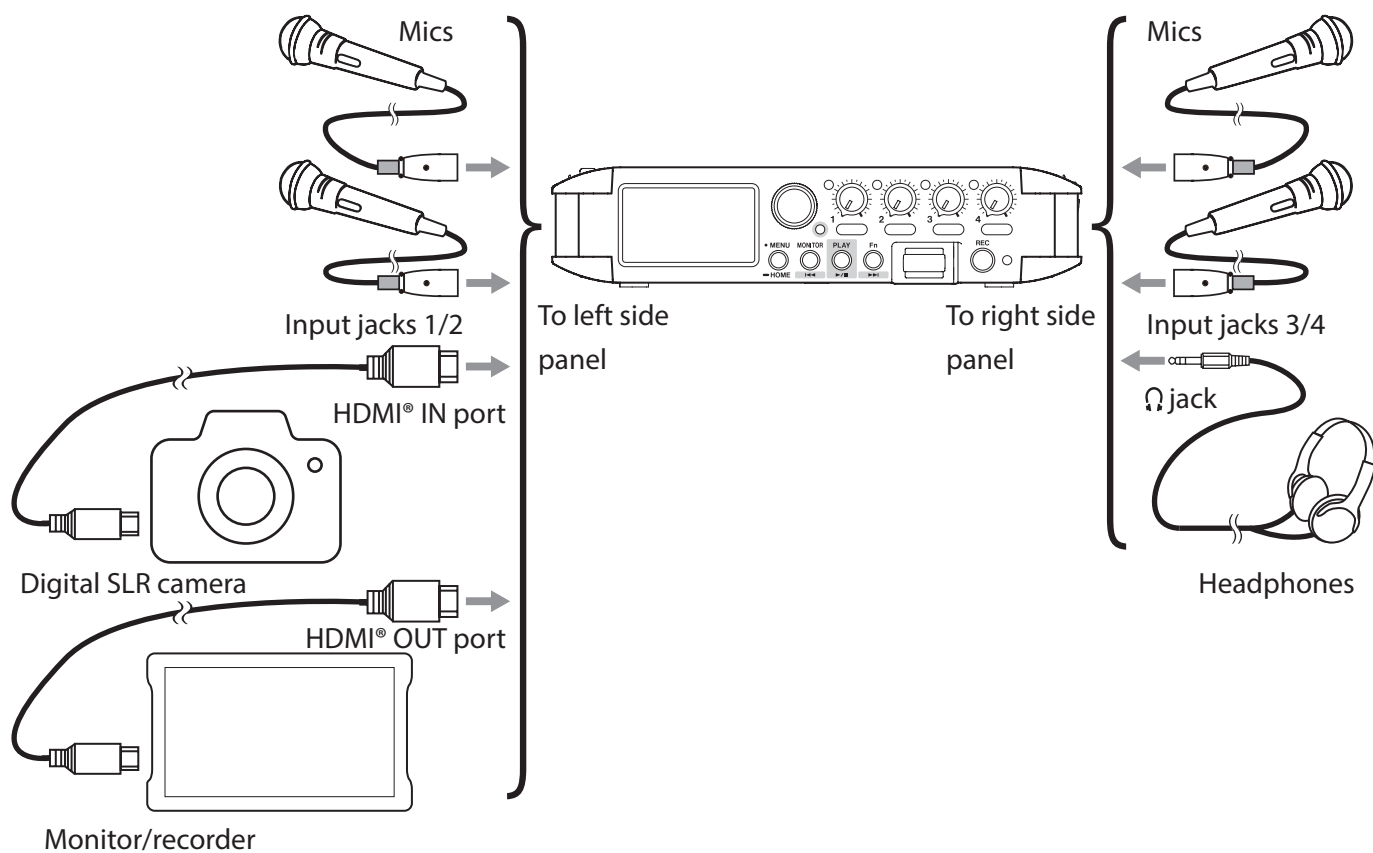


Making input settings for each input

Follow one of the procedures below to open the Input Settings Screen.

- When the Home Screen is open, press the 1, 2, 3 or 4 button on the unit.

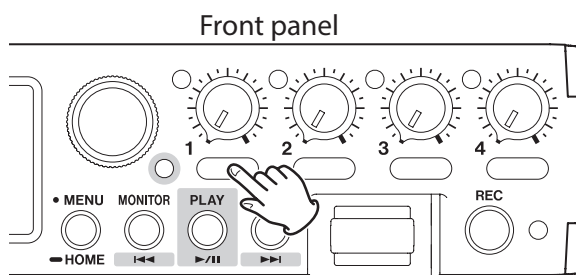

- Tap the desired track when the Home Screen is open.

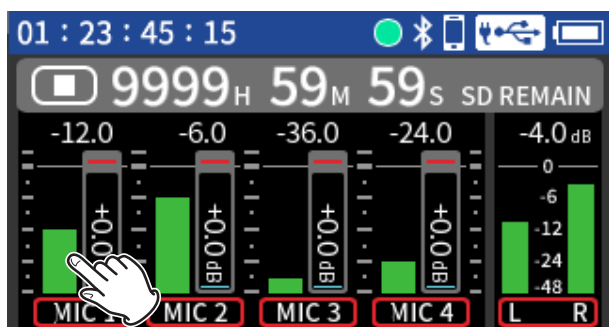

The Input Settings Screen has multiple pages.


Tap the arrows (◀ / ▶) at the bottom of the screen to move between pages.

Making various settings and monitor adjustments

Enabling channels for input

Set this using CH ENABLE.

Channels can be enabled (on) or disabled (off).

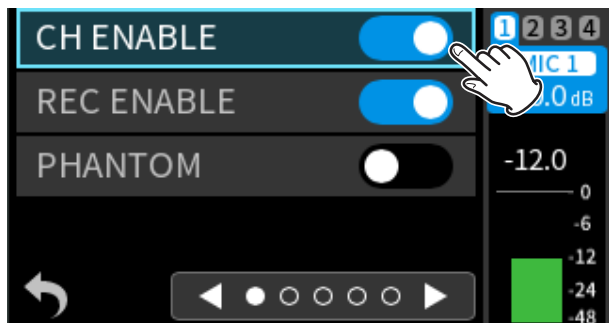


Options: Off, On (default)

Setting channels to record

Set this using REC ENABLE.

Channels can be enabled (on) or disabled (off) for recording.

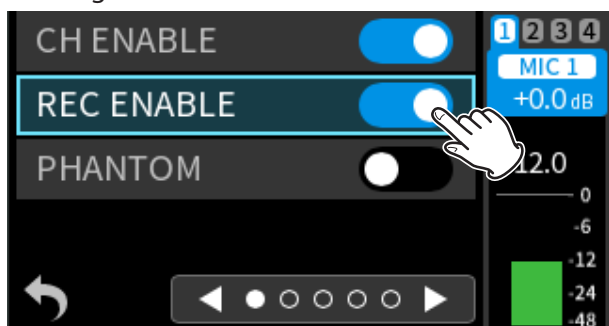


Options: Off, On (default)

Setting input sources

Set this using INPUT.

The input sources of channels can be set.

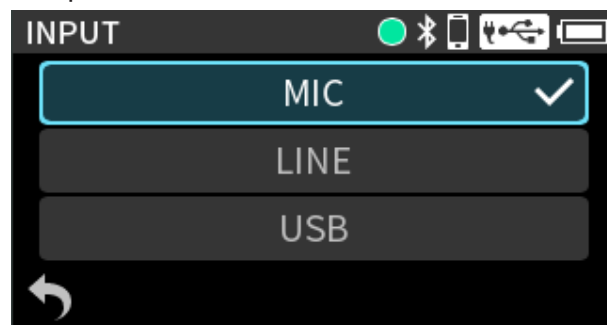

When using input jacks 1–4, select “MIC” or “LINE”.

When using /EXT IN (3/4), select “EXT”.


When using computer output as audio input to this unit, select “USB”. (See “12-4. Using as an audio intern face” on page 110.)

Setting mic power

Using phantom power

Set this using PHANTOM.

Make this setting when using mics that require phantom power.

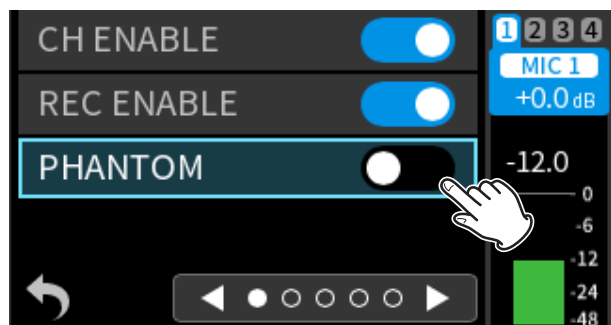

Options: Off (default), On

Setting plug-in power (EXT IN 3/4 jack)

Set this using PLUG IN POWER.

Options: OFF (default), 2.5V, 5V

When connecting a mic that requires plug-in power, set this to "2.5V" or "5V" according to the specifications of that mic.


CAUTION

3.5mm TS cables cannot be used.

Setting input levels / Adjusting monitoring volume

Adjusting input levels


Turn the input level adjustment knobs to adjust the audio signal levels recorded in recording files.

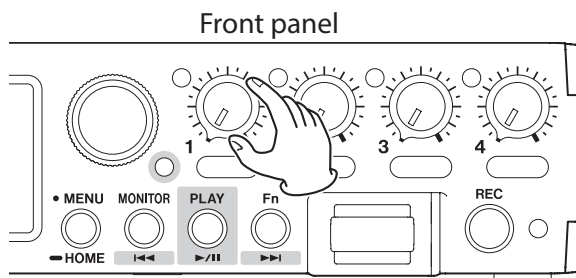

- While watching the level meters, adjust the input level adjustment knobs so that levels average around -12 dB and the peak indicators do not light. (See “5-5. OTHER SETTINGS” on page 83.)
- If a knob’s position is different from its level setting value, the knob will function after it is moved to the position of the set value.


Adjusting the headphone output volume

Use the volume knob on the right side to adjust the volume output from the Ω (headphone) jack and with wireless audio monitoring (using an AK-BT2 sold separately).

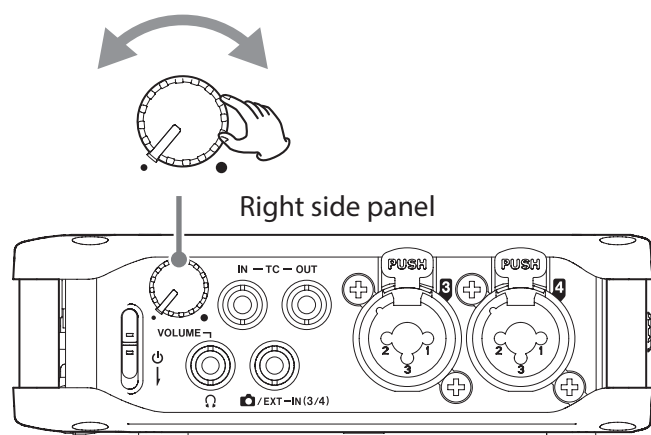


Recording

Starting recording

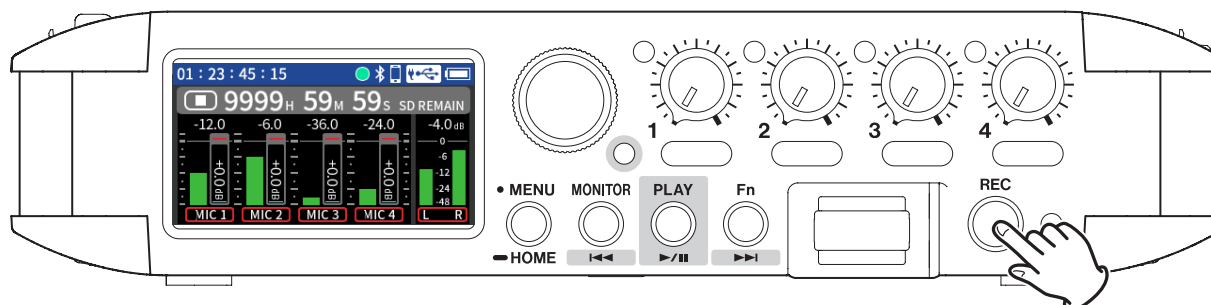


Press the REC button.

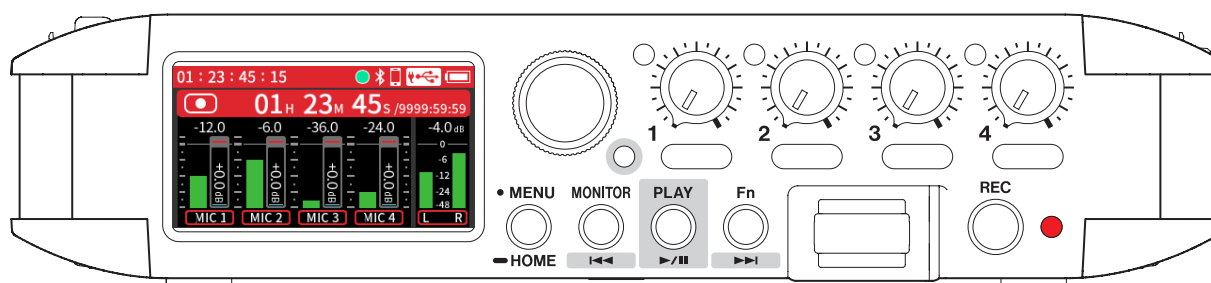


Recording

Stopping recording

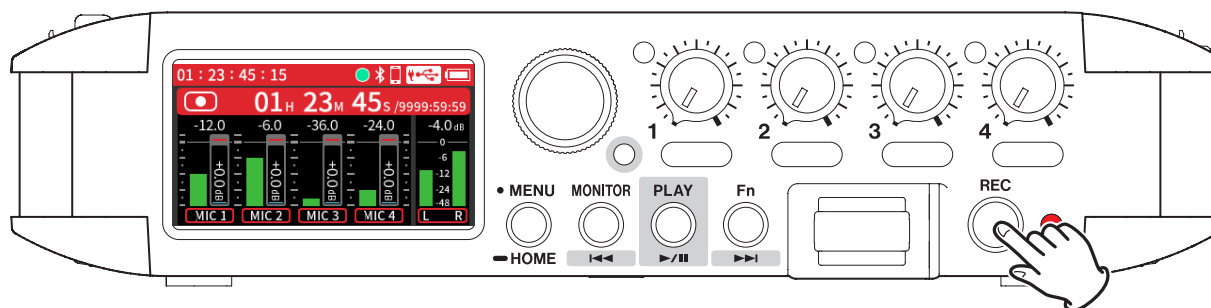


Press and hold the REC button until recording stops.

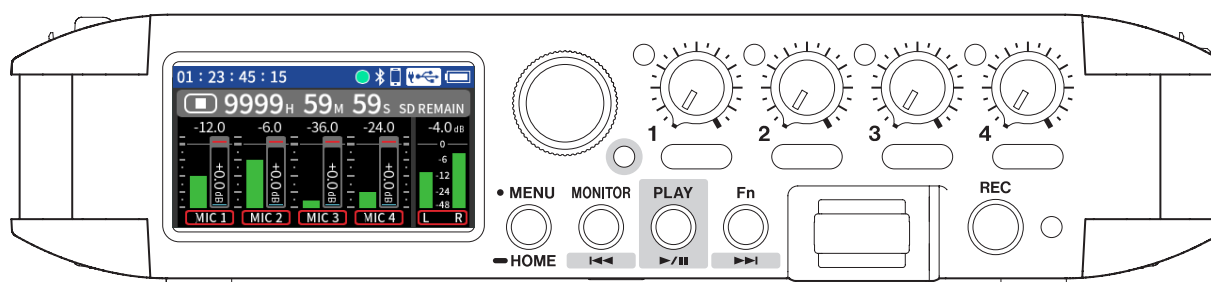


Stopped

Playing recorded projects

Starting playback

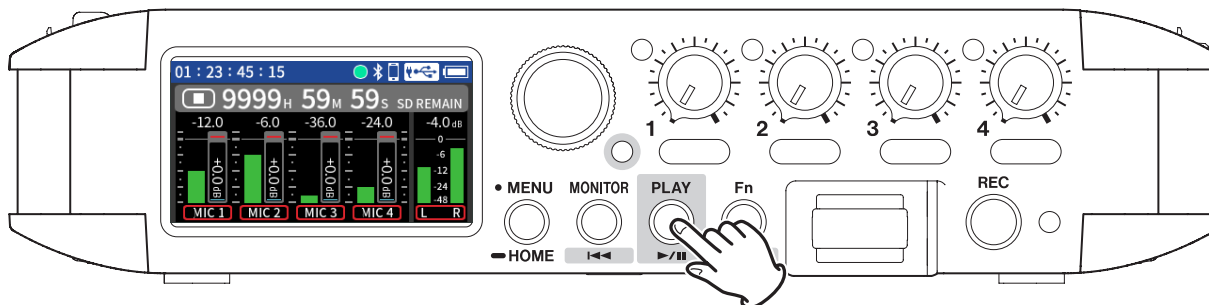

Press the ►/|| button.

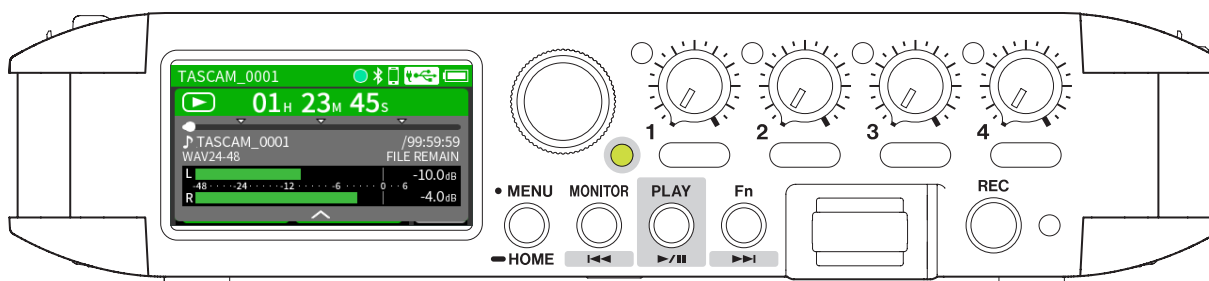


Current project during playback


The transport indicator will light.

During playback, the MONITOR button will function as I◀◀ and the Fn button will function as ▶▶I.

Stopping playback

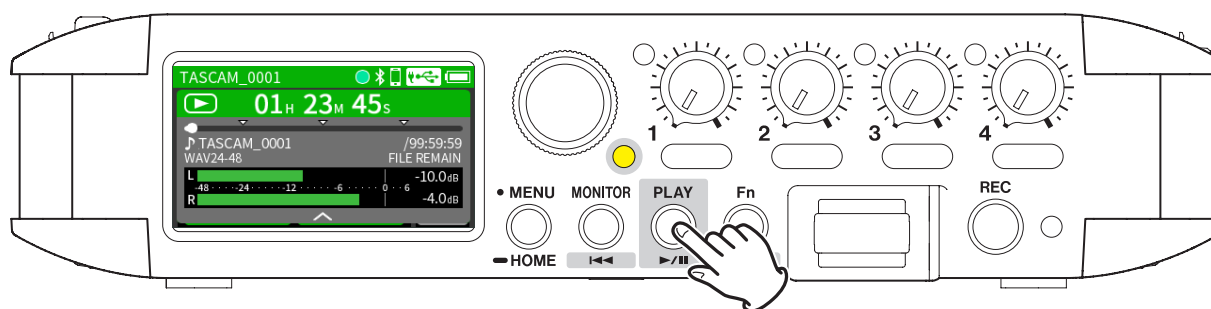


Press the ►/|| button.

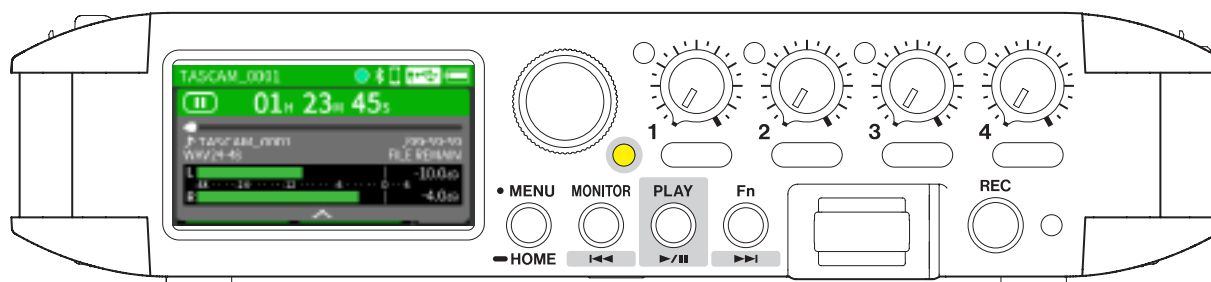


Stopped

Returning to the Home Screen

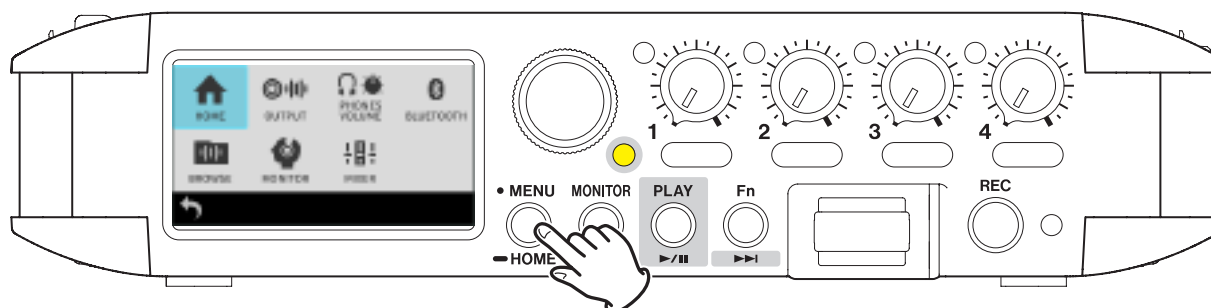

Press the MENU button and select HOME.

Or, press and hold the MENU button.


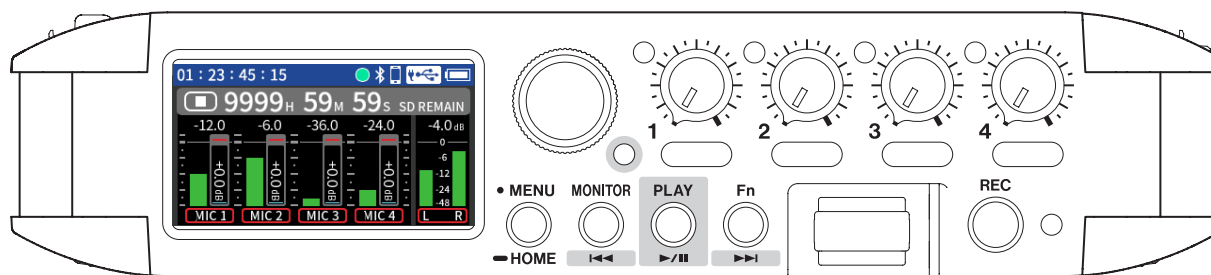


The transport indicator will become unlit, and the Home Screen will reopen.

Synchronizing with timecode

Receiving timecode using a cable


Press the MENU button and set TIMECODE > MASTER to "TC IN (JAM)".

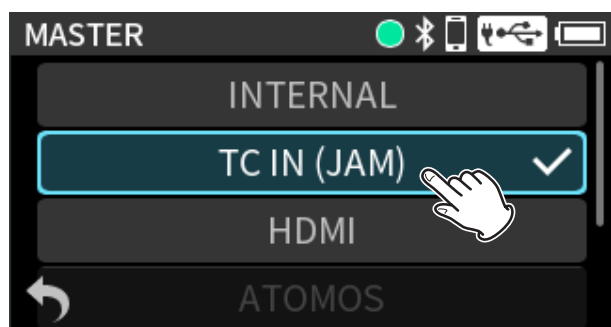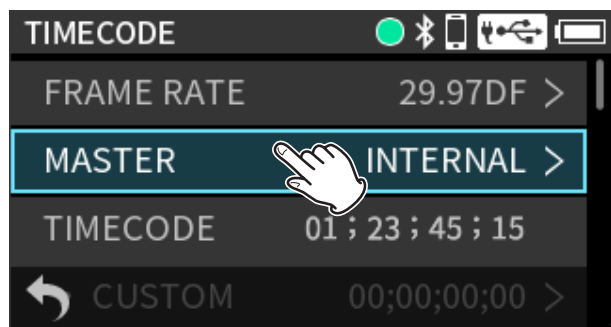

To receive timecode from the TC IN jack, input must be in the specified level range for LTC.


Use a 3.5mm cable (TS or TRS) to connect the output of the timecode transmitting device to the TC IN connector on this unit.

Right side panel

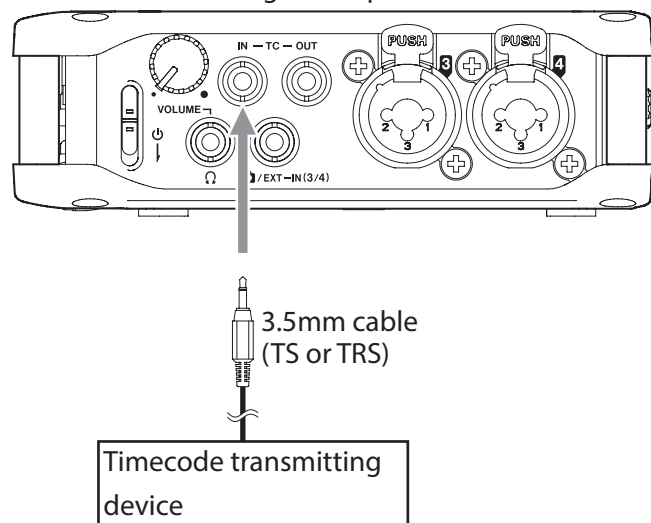


Outputting timecode using a cable

Press the MENU button and set TIMECODE > TC MODE to "FREE RUN".

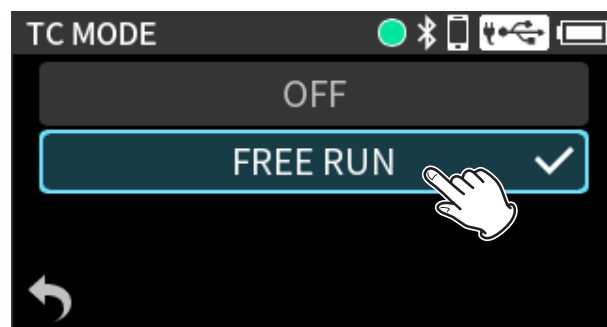


Use a 3.5mm cable (TS or TRS) to connect the input of the timecode receiving device to the TC OUT connector on this unit.

Right side panel

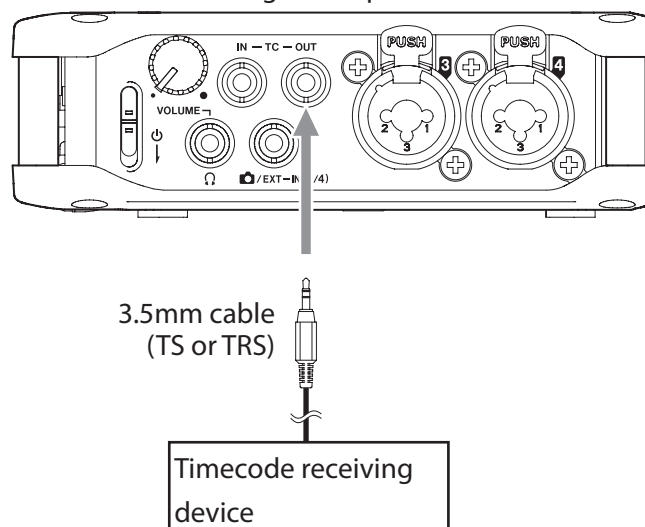

Synchronizing with a camera using HDMI®


Press the MENU button and set TIMECODE > MASTER to "HDMI".

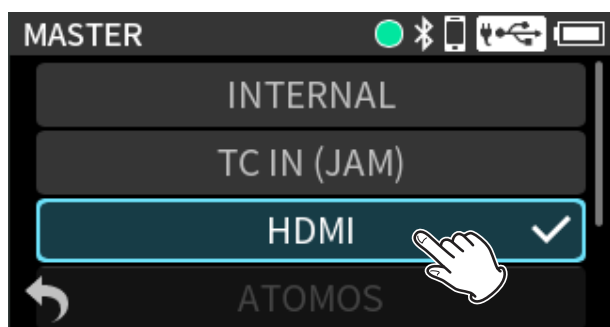

Connecting with a camera using HDMI®

This unit can be synchronized with a camera's clock by connecting the camera's HDMI® output to this unit's HDMI® IN port. Moreover, HDMI® timecode can be received from a camera.

HDMI® monitor/recorder

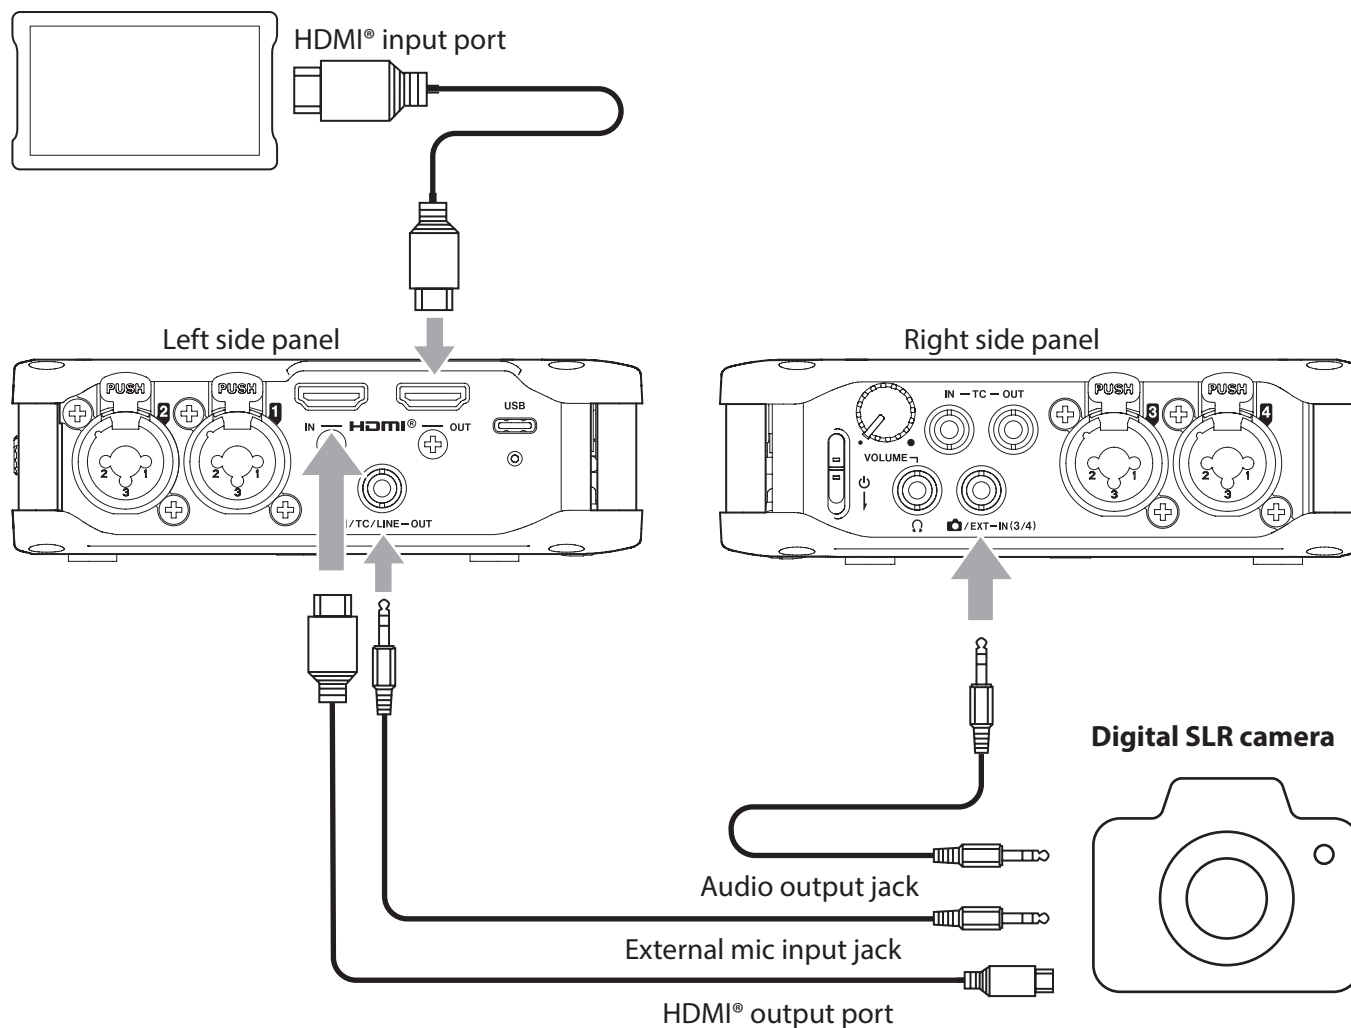

1. Introduction

Thank you very much for purchasing the TASCAM FR-AV4.

Before using this unit, read this Owner's Manual carefully so that you will be able to use it correctly and enjoy working with it for many years. After you have finished reading this manual, please keep it in a safe place for future reference.

You can also download this Owner's Manual from the TASCAM website.



FR-AV4

<https://tascam.jp/int/product/fr-av4/docs>

1-1. Included items

This product includes the following items.

Take care when opening the package to avoid damaging the items. Keep the box and packing materials for transportation in the future.

Please contact the store where you purchased this unit if any of these items are missing or have been damaged during transportation.

Main unit × 1

Safety Guide (with warranty) × 1

TASCAM ID registration guide × 1

Battery holder (BH-4AA) × 1

1-2. Accessories sold separately

This product does not include the following items. Please purchase any that you need for your uses.

- SD card
- Batteries
- AC adapter
- Bluetooth® adapter (AK-BT2)
- USB cable
- HDMI® cable
- Extra battery holders (BH-4AA)

SD cards

An SD card is necessary to record and play files with this unit. Prepare one for use.

This unit can use SD cards that are Class 10 or higher and compatible with SD, SDHC or SDXC standards. A list of SD cards that have been confirmed for use with this unit can be found by accessing the TASCAM website. You can also contact TASCAM customer support service.

<https://tascam.jp/int/product/FR-AV4/docs>

Batteries

To power this unit with batteries, prepare batteries of one of the following types.

- AA alkaline batteries × 4
- AA nickel-metal hydride batteries × 4
- AA lithium batteries × 4

Using AC adapter

This is necessary to operate this unit using AC power. We highly recommend using the PS-P520U AC adapter (sold separately) that is designed for use with this unit. When using another external power supply device, use one that meets the following specifications.

- Supplied voltage: 5 V
- Supplied current: 1.5 A or more

Using a power supply device with specifications other than the above could cause malfunction, overheating, fire or other problems.

If trouble should occur, stop using the unit and contact the retailer where you purchased it or a TASCAM customer support service to request repair.

NOTE

This unit does not have a battery charging function when using an AC adapter.

AK-BT2 Bluetooth® adapter overview

Installing an AK-BT2 in this unit enables timecode synchronization with products made by Atomos as well as wireless remote control using smartphones and tablets.*

Input sounds can be monitored and playback sounds can be listened to wirelessly by connecting Bluetooth headphones or speakers.

NOTE

Wireless timecode, wireless remote control and wireless audio monitoring can be used simultaneously.

* The TASCAM RECORDER CONNECT remote control app can be used to simultaneously control and monitor up to 5 units.

USB cables (for communication and data transmission)

A USB cable must be prepared to connect this unit to a computer (Windows/Mac) or smartphone. (We recommend a product that is USB-IF certified.)

This unit has a USB Type-C port.

Prepare a USB cable suitable for the USB port of the computer or smartphone being used.

Connecting to an iOS device with a lightning port

A genuine Apple Lightning to USB Camera Adapter and a commercially-available Type-A to Type-C cable are necessary.

USB cables designed only for charging cannot be used.

HDMI® cables (Ver. 2.1 recommended)

Use these for HDMI® timecode synchronization.

Use these for connection to digital single lens reflex cameras (DSLR), monitors and recorders.

Battery holder (BH-4AA)

The unit has one battery holder installed.

Battery replacement can be conducted more quickly by preparing another battery holder.

1-3. Features

- Dual A/D converters enable 32-bit float recording
 - Recording formats: 24-bit and 32-bit float, 48, 96 and 192 kHz
- Recording of 6 tracks (4 tracks + stereo mix)
- 4 XLR/TRS combo jacks with TASCAM Ultra HDDA mic preamps that provide high audio quality with –127dBu EIN
- Timecode support includes generator function, input and output, and jam sync
- Built-in TCXO realizes high-precision synchronization with no more than 1 frame error per 24 hours
- Atomos products and Bluetooth wireless timecode synchronization supported*
- Synchronization functions using HDMI® connections
 - Audio recording starting/stopping coordinated with camera video recording starting/stopping
 - Image and sound lags can even be eliminated with cameras that do not support timecode by using HDMI® clock
 - HDMI® timecode synchronization
 - Transport operations and audio transmission using FR-AV4 cascade connections
 - 4K and 8K video pass-through supported
- Wireless Bluetooth audio monitoring*
- Support for SDXC cards up to 512 GB
- Simultaneous operation of up to 5 supported devices from the TASCAM RECORDER CONNECT app*
- 1.9" LCD touchscreen and easy-to-use jog wheel
- Low-cut filter, EQ, limiter and noise gate functions
- Input and output delay functions (0–300 msec)
- 3.5mm stereo mini jack camera/external input (with plug-in power support)
- 3.5mm stereo mini jack headphone and camera/timecode/line out jacks
- Ambisonic audio recording in A and B formats (AmbiX, FuMa) supported
- 6-in/2-out USB audio interface functions with 32-bit float support
- Auto file save function automatically saves recording data every 20 seconds while recording
- Tone generator function is convenient when adjusting the relative levels of different equipment
- Powered by 4 AA batteries, a portable USB battery or a PS-P520U AC adapter (sold separately)
- Includes a BH-4AA battery holder (additional BH-4AA available for quick and easy battery swaps)
- Camera screw enables use with camera rigs

* This requires a separate AK-BT2 Bluetooth adapter. AK-BT1 adapters are not supported.

1-4. Conventions used in this manual

We use the following conventions in this manual.

- SD/SDHC/SDXC memory cards are referred to as “SD cards”.
- Smartphones, tablets and other devices connected to this unit using Bluetooth are called “Bluetooth devices”.
- Files created during a single recording are referred to collectively as a project.
- The project that is currently selected is called the “current project”.
- Characters that appear on the display are shown like this: “OK”.
- References to “iOS” in this document also include “iPadOS”.
- As necessary, additional information is provided under TIP, NOTE and CAUTION headings.

TIP

These are tips about how to use the unit.

NOTE

These provide additional explanations and describe special cases.

CAUTION

Failure to follow these instructions could result in damage to equipment or lost data, for example.

CAUTION

Failure to follow these instructions could result in injury.

Information is given about products in this manual only for the purpose of example and does not indicate any guarantees against infringements of third-party intellectual property rights and other rights related to them. TEAC Corporation will bear no responsibility for infringements on third-party intellectual property rights or their occurrence because of the use of these products.

Properties copyrighted by third parties cannot be used for any purpose other than personal enjoyment and the like without the permission of the right holders recognized by copyright law. Always use this equipment properly. TEAC Corporation will bear no responsibility for rights infringements committed by users of this product.

1. Introduction


1-5. About SD cards

- In case of the failure of the Product caused by the tapes or other media ("Media") you used, the repair for the failure shall not be covered by the warranty of the Product and must be done at your own expense. It is highly recommended that you shall avoid using the Media such as those not used for years or used after a long period of use or those with mold, blots, stickiness, folds, creases or twists.
- TEAC shall never be responsible for any damages due to the Media including but not limited to the corruption or breakage of the Product or the Media, dragging the tapes into the Product, and/or loss of data in whole or in part that arises out of or related to the use of the Media. That is the same for any damages such as lost profit, indirect or consequential damages, and/or special damages. It is highly recommended that you shall take appropriate measures to prepare for the unexpected loss of data along with the Copyright Act of your country or region.

Note about formatting

SD cards formatted by this unit are optimized to improve performance during recording. Use this unit to format the SD cards to be used with it. Errors might occur when recording with this unit using an SD card formatted by a computer or another device.

Write protection switches

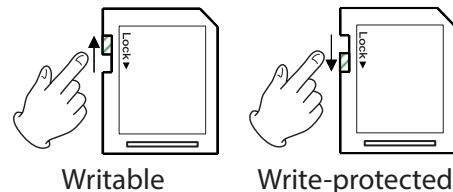

SD cards have write-protection switches that prevent writing new data to them.

File recording and editing will not be possible if the protect switch is moved to the LOCK position. Move the switch to the unlocked position in order to record, erase and otherwise edit data on the card.

1-6. Precautions for placement and use

- The operating temperature range of this unit is 0–40 °C.
- Do not install this unit in the following types of locations. Doing so could make the sound quality worse or cause malfunction.
 - Locations with frequent vibrations
 - Near windows or other places exposed to direct sunlight
 - Near heaters or other extremely hot places
 - Extremely cold places
 - Very humid or poorly ventilated places
 - Very dusty places
- Install the unit so that it is level.
- To enable good heat dissipation, do not place anything on top of the unit.
- Do not place the unit on top of a power amplifier or other device that generates heat.

1-7. Beware of condensation

Condensation could occur if the unit is moved from a cold place to a warm place, it is used immediately after a cold room has been heated or it is otherwise exposed to a sudden temperature change.

To prevent this, or if this occurs, let the unit sit for one or two hours at the new room temperature before using it.

1-8. Cleaning the unit

Use a dry soft cloth to wipe the unit clean. Do not wipe with chemical cleaning cloths, thinner, alcohol or other chemical agents. Doing so could damage the surface or cause discoloration.

1-9. About TASCAM customer support service

TASCAM products are supported and warrantied only in their country/region of purchase.


To receive support after purchase, on the TASCAM Distributors list page of the TEAC Global Site, search for the local company or representative for the region where you purchased the product and contact that organization.

<https://teac-global.com/>

When making inquiries, the address (URL) of the shop or web shop where it was purchased and the purchase date are required. Moreover, the warranty card and proof of purchase might also be necessary.

2. Names and functions of parts

2-1. Front panel

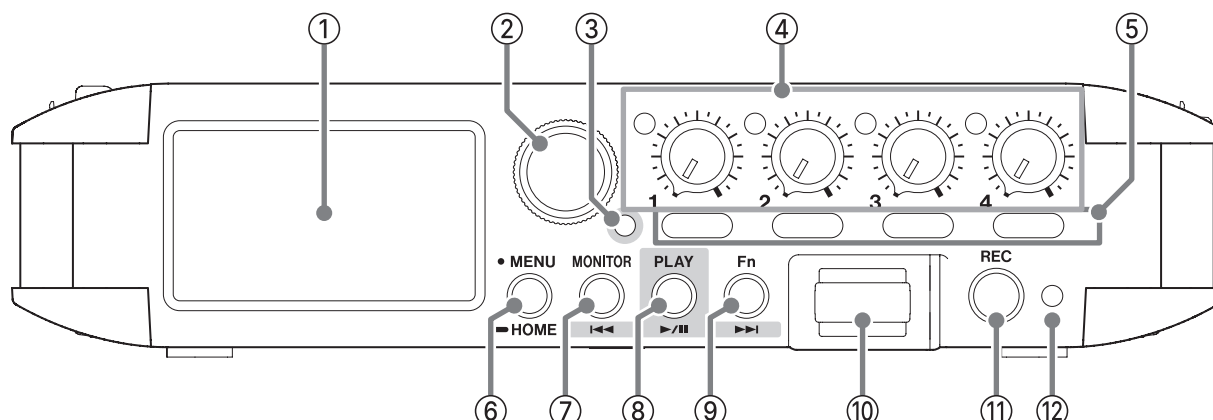

① Touchscreen

Tap and swipe the screen being shown to operate it.

② DATA dial (ENTER)

Turn to select items and change values on settings screens.

③ Transport indicator

This lights during playback. When lit, the ►, I◀◀ and ▶▶I button functions become available.

④ INPUT Level knobs and peak indicators

INPUT Level knobs

Use these to adjust the input levels of channels 1–4.

Peak indicators

If a input level exceeds the peak level, that peak indicator will light.

⑤ 1–4 buttons

Press these briefly to open the input settings screens for channels 1–4. Press and hold these to switch the KNOB HOLD setting.

⑥ MENU / HOME button

This opens the Menu Screen.

This returns to the previous screen from any screen other than the Home Screen. Press and hold this any time to return to the Home Screen.

⑦ MONITOR / I◀◀ button

When transport indicator unlit

This opens a menu when the monitoring source can be selected.

When transport indicator lit

This functions as the I◀◀ button.

Pressing the I◀◀ button during playback will return to the beginning of the file. Pressing the I◀◀ button at the beginning of a file will skip to the beginning of the previous file. Press and hold this button to search backward.

⑧ **PLAY (▶ / II) button**

When stopped

This starts playback. The transport indicator will become lit.

During playback

This pauses playback.

When a file is selected on the Browse Screen

This starts file playback.

⑨ **Fn / ▶▶I button**

When transport indicator unlit

A specific function can be assigned. (See "Assigning the Fn button function" on page 46.)

The default setting is MARK/SLATE.

Press it briefly to add a mark or press and hold it to add a slate tone.

When transport indicator lit

This functions as the ▶▶I button.

This skips to the next file.

Press and hold this button to search forward.

⑩ **Bluetooth® adapter connector**

Connect an AK-BT2 Bluetooth adapter (sold separately) here.

⑪ **REC button**

Press this when stopped to start recording.


Press and hold this when recording to stop recording.

⑫ **REC indicator**

This lights during Recording

2. Names and functions of parts

2-2. Left side panel

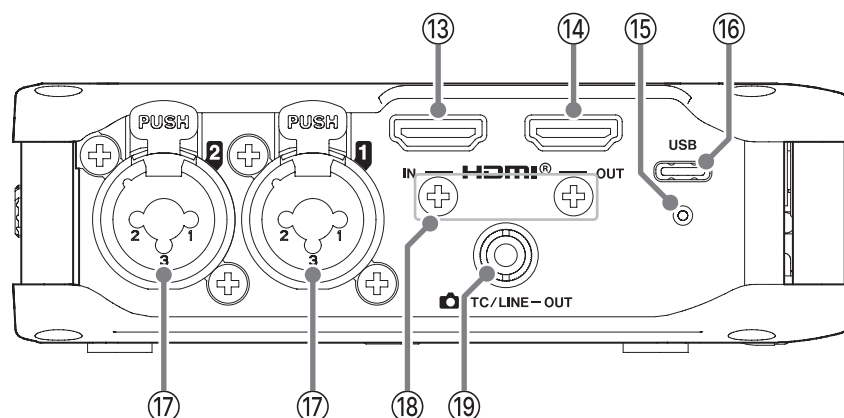

⑬ HDMI® IN port

Connect a DSLR camera or other HDMI® source device here.

⑭ HDMI® OUT port

Connect an HDMI® monitor or other HDMI® sync device here.

⑮ USB Type-C connector attachment screw hole

Use this to secure a Type-C USB cable with single screw locking.

⑯ USB Type-C port


This is a Type-C USB port.
Computers and smartphones can be connected here.
(See "4-5. Computers and smartphones" on page 67.)
When using an AC adapter, connect it to this port. (See "Using an AC adapter (sold separately)" on page 49.)

⑰ Input jacks 1/2 (Inputs 1/2)

Connect mics with XLR/TRS plugs here.
XLR (1: GND, 2: HOT, 3: COLD)
TRS (Tip: HOT, Ring: COLD, Sleeve: GND)

⑱ HDMI® cable disconnection prevention accessory attachment screws

Attach an accessory using M3 screws here (an ATEN LockPro 2X-EA12 can be used).

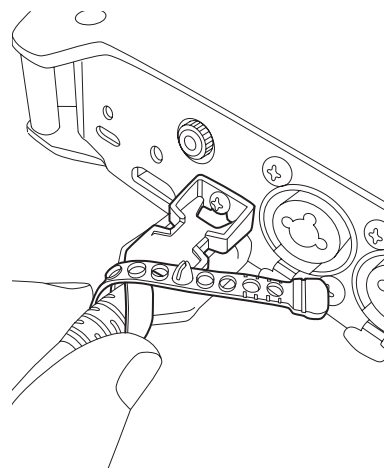


Example of installation viewed from behind

⑲ TC/LINE OUT jack

Use a 3.5mm stereo mini plug cable to connect this with the line input jack of another device, with a device receiving timecode or with a camera.

2-3. Right side panel

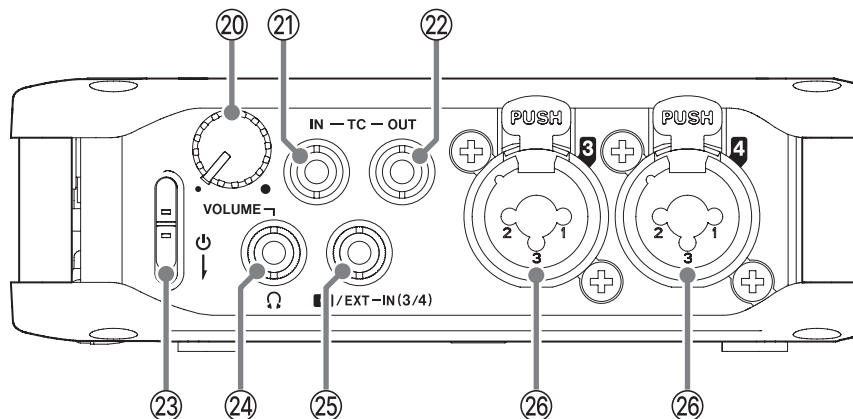

②③ ⏻ (headphone) volume knob

Use this to adjust the volume output from the ⏻ (headphone) jack and for wireless audio monitoring.

②① TC IN jack

Use a 3.5mm cable (TS or TRS) to connect this with the timecode output connector of an external device.

②② TC OUT jack

Use a 3.5mm cable (TS or TRS) to connect this with a device that receives timecode.
Make timecode output settings in order to use the TC OUT jack. (See “14-6. Outputting timecode” on page 123.)

②③ ⏻ Switch

Use this to turn the unit on and off.

⚠ CAUTION

Before turning the unit on, lower the volumes of connected equipment to their minimum levels. Failure to do so might cause sudden loud noises, which could harm hearing or result in other trouble.

②④ ⏻ (headphone) jack

Connect headphones to this jack.

②⑤ 📷/EXT IN (3/4) jack

This can be connected to an external mic (3.5mm TRS) that supports plug-in power, a camera or an audio device.

②⑥ Input jacks 3/4 (Inputs 3/4)


These balanced analog inputs combine XLR mic and standard TRS jacks.

XLR (1: GND, 2: HOT, 3: COLD)

TRS (Tip: HOT, Ring: COLD, Sleeve: GND)

2. Names and functions of parts

2-4. Top and bottom panels

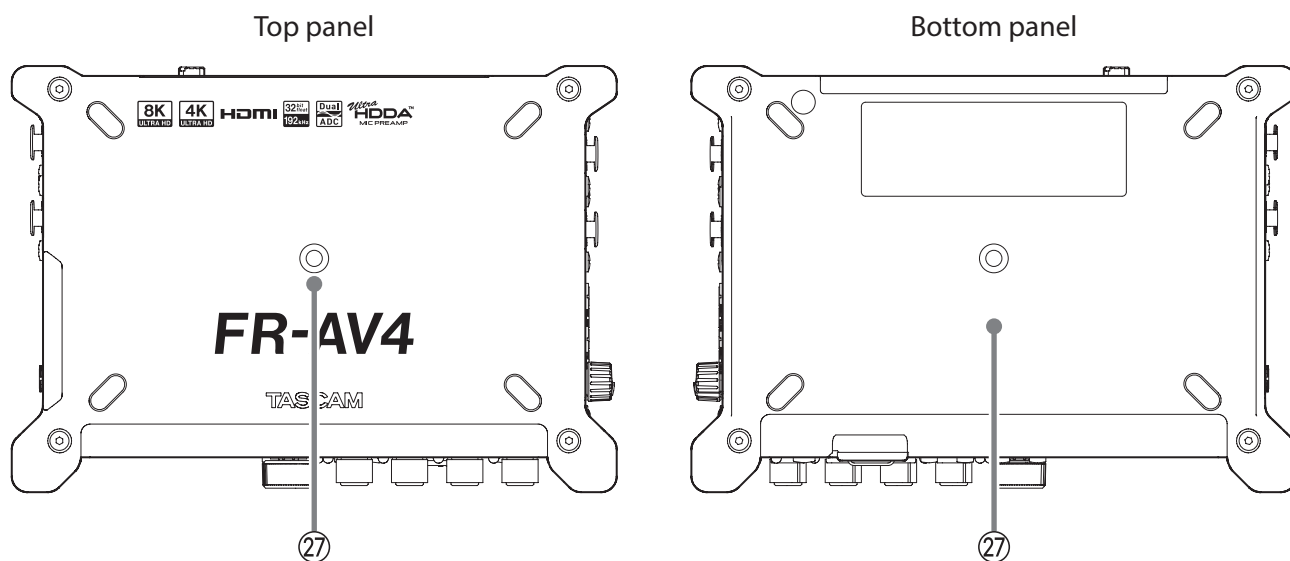


②⑦ Tripod mounting threads (1/4-inch)

Use this to attach this unit to a tripod.


CAUTION

Use screws that are no more than 4.5 mm long.
Screws that are longer than 4.5 mm cannot be used for attachment.

2-5. Rear panel

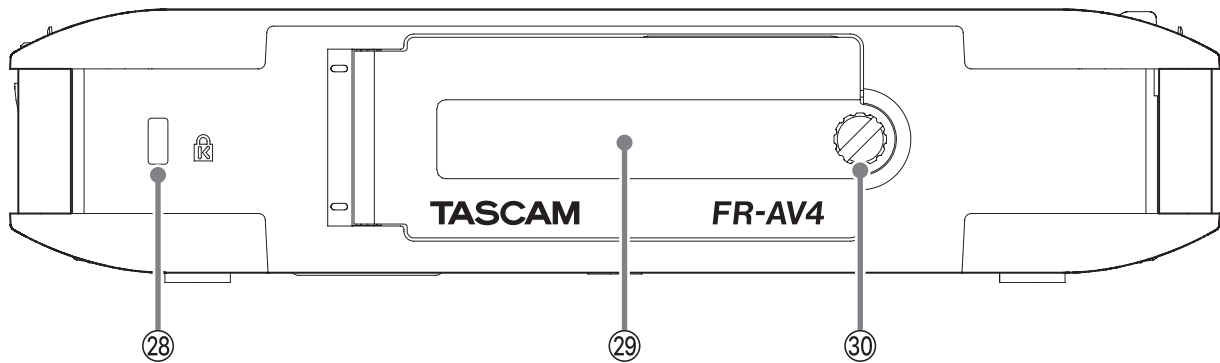

With rear cover open

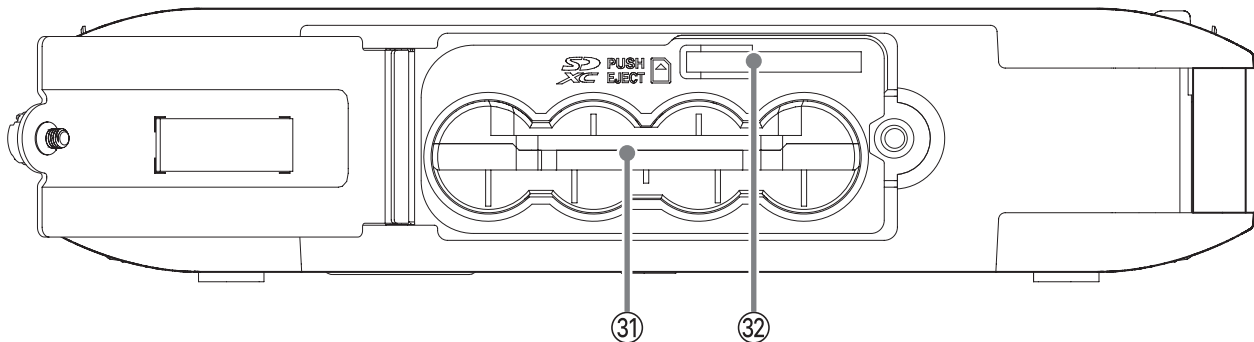

②⑧ **Kensington security slot**

The unit can be secured by attaching a Kensington lock.

②⑨ **Rear cover**

This covers the battery compartment and the SD slot.

③⑩ **Rear cover attachment screw**

Loosen this to open the rear cover.

③① **Battery holder**

Install batteries in this compartment to power the unit. (See "Using AA batteries" on page 48.)

③② **SD card slot**

Use this slot to insert SD cards.

2. Names and functions of parts


2-6. Basic operation

Functions can be set and adjusted by using the touchscreen of this unit.

Moreover, most operations can also be conducted using the DATA dial without touching the screen.


Opening the Menu Screen

1. Press the MENU button.

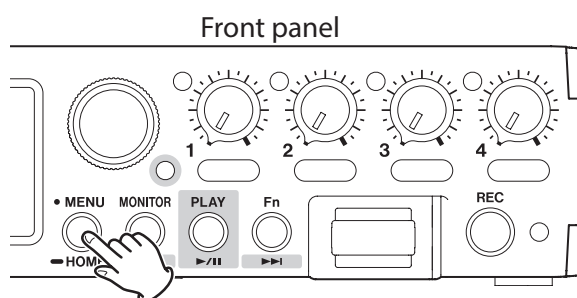


2. Tap the icon for the desired setting item.
The appearance of the Menu Screen changes according to the status of the unit.


When stopped

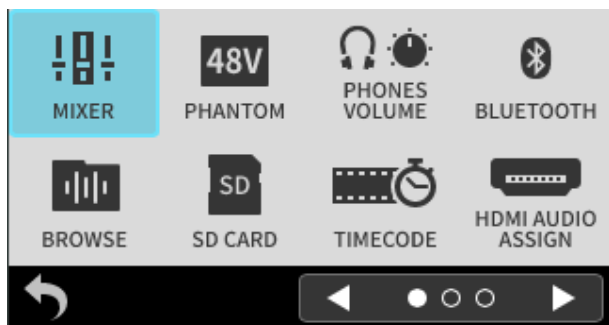

When recording

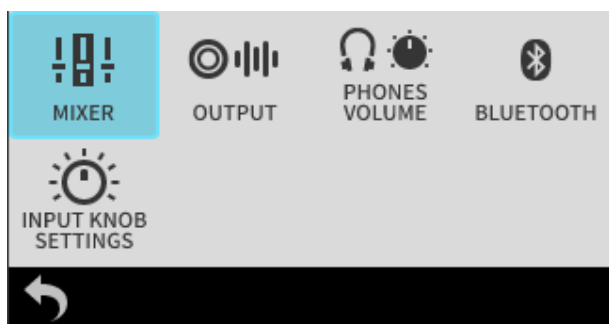


When playing back

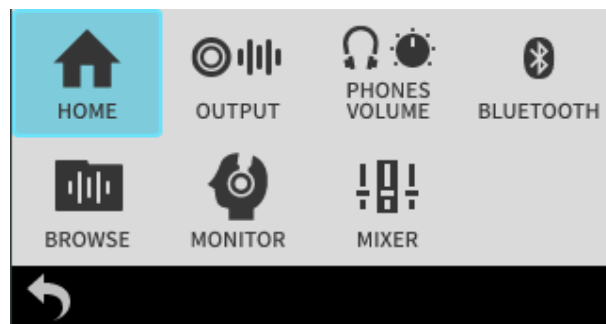

NOTE


The Menu Screen has multiple pages. Tap ◀ and ▶ at the bottom of the screen to move between pages.

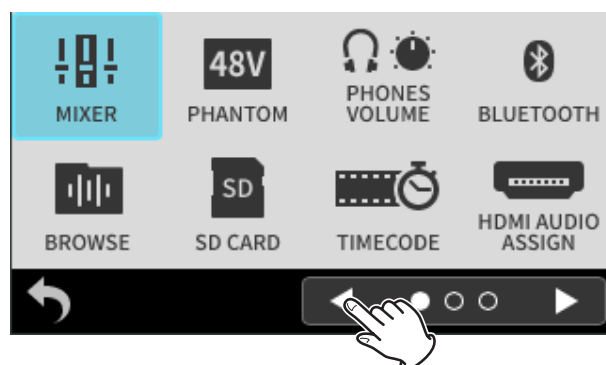

Setting item selection



Using the touchscreen

Tap the desired setting item.

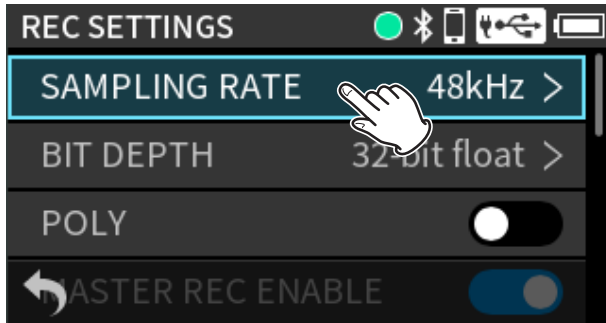


Using the DATA dial

1. Turn the DATA dial to highlight the desired item.

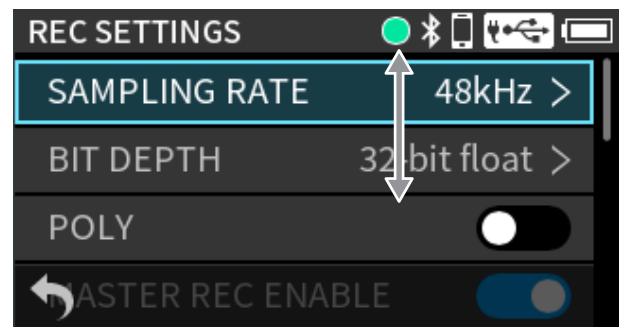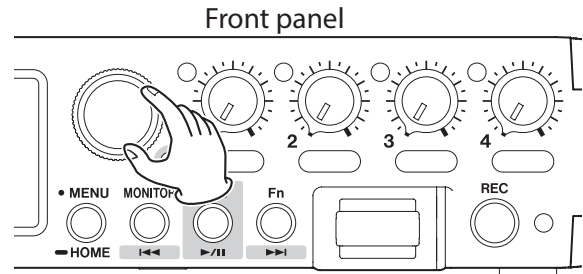

2. Press the DATA dial to confirm.

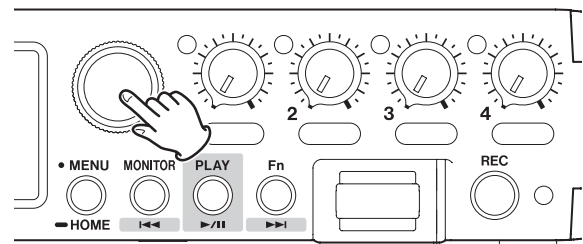

TIP


By pressing the DATA dial while turning it, cursor movement and parameter adjustment can be accelerated.

2. Names and functions of parts

Scrolling the screen


Using the touchscreen

Slide up or down while touching the screen.

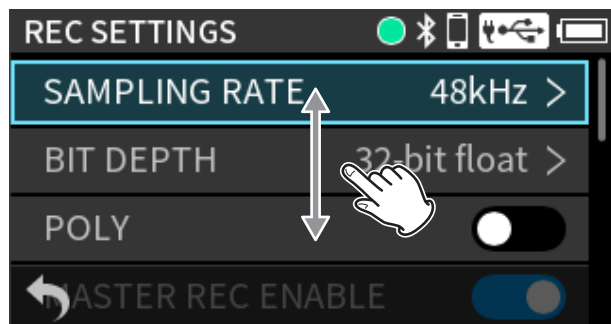


Using the DATA dial

Turn the DATA dial to move the selection position.

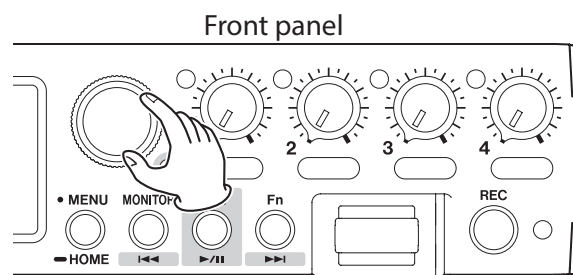

This will scroll the screen to reveal hidden items.

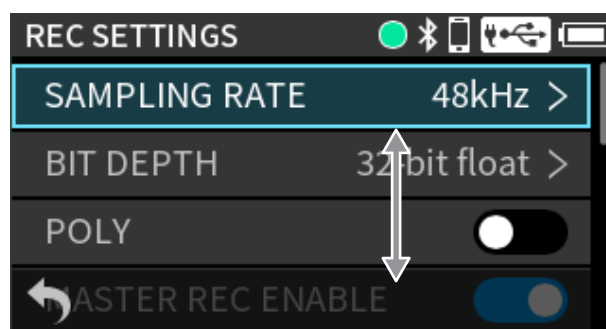


TIP

By pressing the DATA dial while turning it, cursor movement and parameter adjustment can be accelerated.

Going back


Using the touchscreen

Tap the  icon at the bottom left of the screen to go back one screen.

Using the MENU button

Press the MENU button to go back one screen.

Using the DATA dial


Turn the DATA dial to move the cursor to the  mark.
Press the DATA dial to go back one screen.

2. Names and functions of parts

Sliders


Using the touchscreen

Move a slider left and right to adjust it.

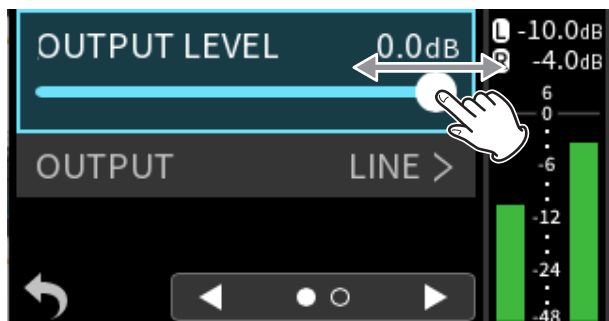


Using the DATA dial


1. Turn the DATA dial to select a slider.
2. Press the DATA dial to select it.

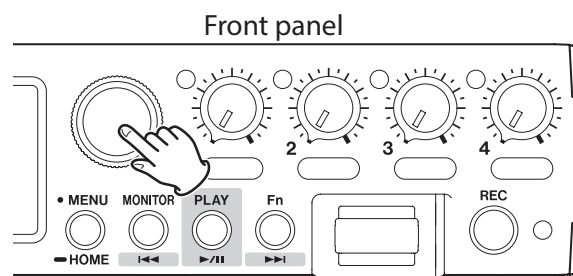


3. Turn the DATA dial to move the slider.

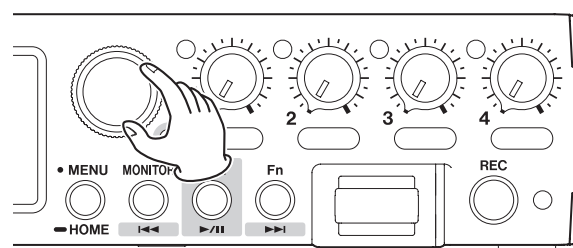

The slider will move linked to the rotation of the DATA dial.

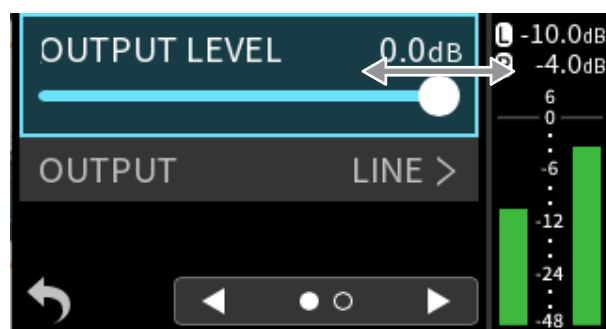

4. Press the DATA dial to confirm.

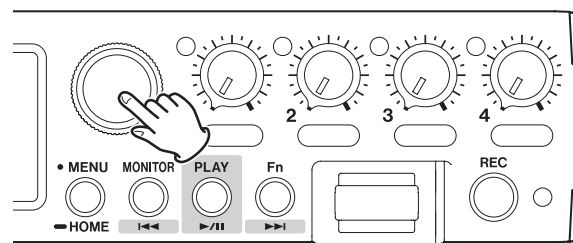


Slider switches

: On

: Off


Using the touchscreen

Tap a slider switch to turn it on/off alternately.

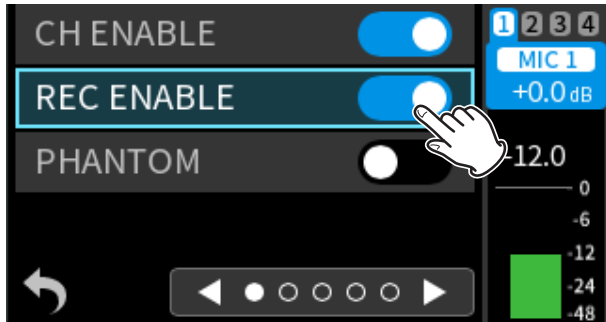


Using the DATA dial

1. Turn the DATA dial to select a slider switch.

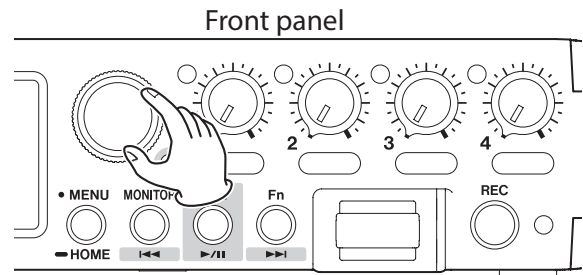

2. Press the DATA dial to turn it on/off alternately.

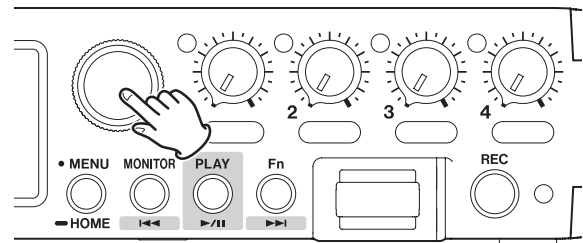


2. Names and functions of parts

Selecting setting values

The item with the check on its right side is the currently set value.



Tap the screen to select an item.

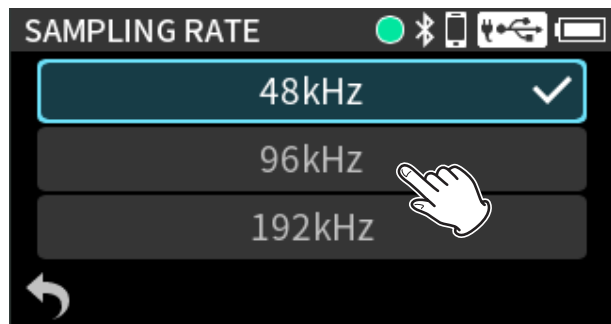


After confirming the setting, the previous screen will reopen.

Using the DATA dial

1. Turn the DATA dial to select the item to set.

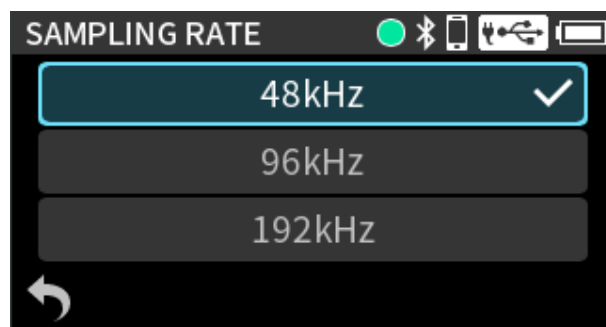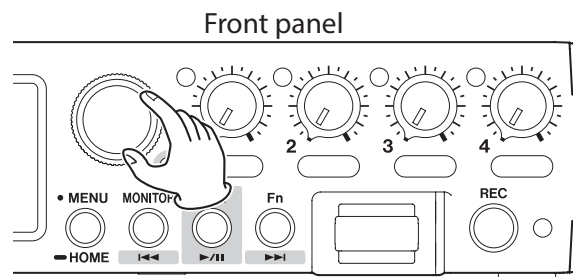

2. Press the DATA dial to confirm.

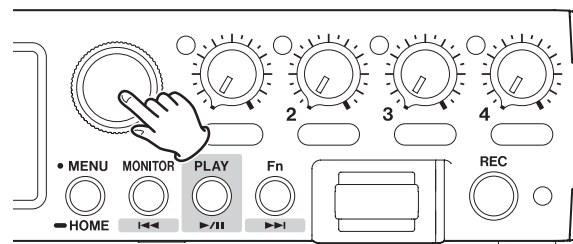

After confirming the setting, the previous screen will reopen.

Character input

Selecting an item that allows character input will open the Character Input Screen.

The functions of the keys other than the characters are as follows.



: Backspace



: Switch between numbers, lowercase and uppercase letters




: Confirm input



: Cancel input and go back

Using the touchscreen


1. Tap keys to input characters.

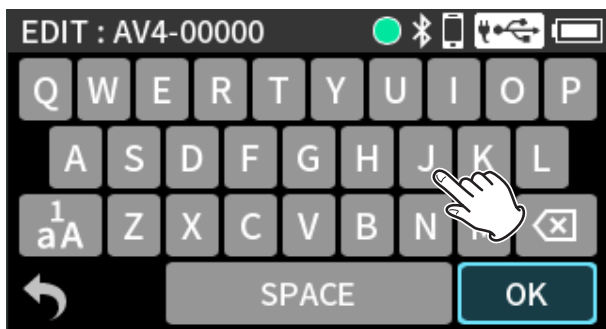


2. Tap the "OK" button to confirm the input.

Using the DATA dial

1. Turn the DATA dial to select the desired character for input.

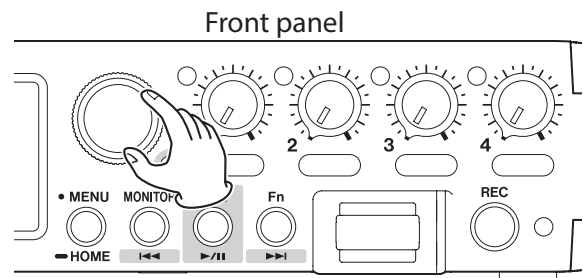

2. Press the DATA dial to confirm.

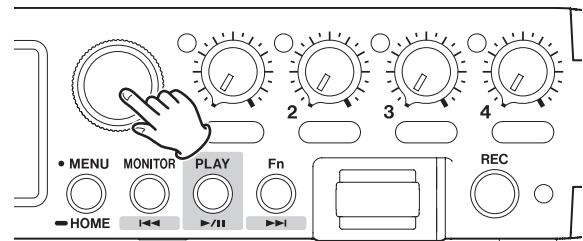


3. Repeat steps 1 and 2 to input more characters.
4. Select the "OK" button and press the DATA dial to confirm.

2. Names and functions of parts


Inputting numbers

Using the touchscreen


1. Tap the area to change.

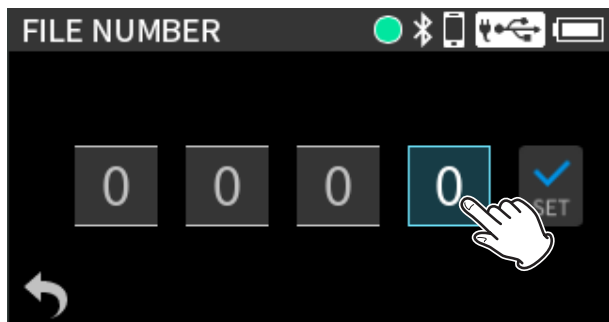

2. Scroll the selected item up and down to select the value.

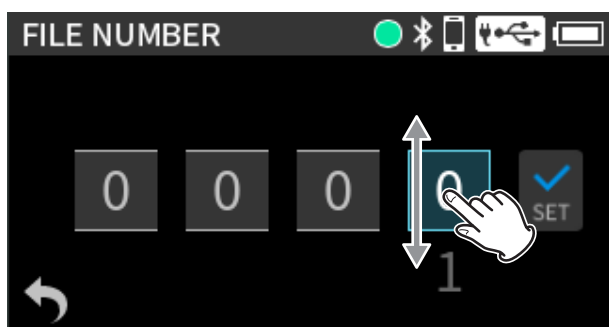


3. Tap the selected value.

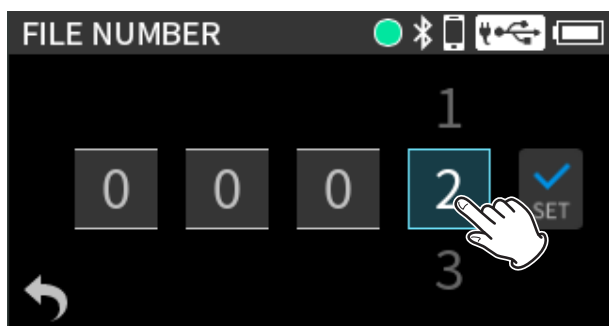



4. Set other digits in the same manner.

5. When done setting, tap "SET" to confirm.


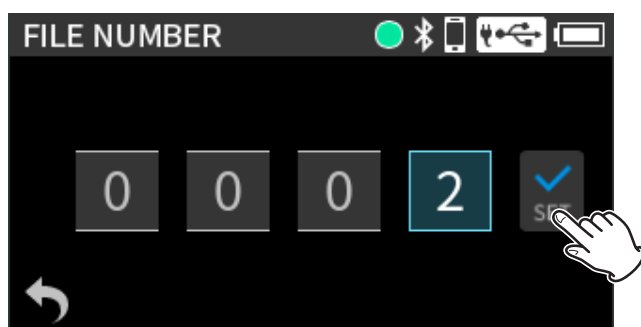


Using the DATA dial

1. Turn the DATA dial to select the desired number for input.

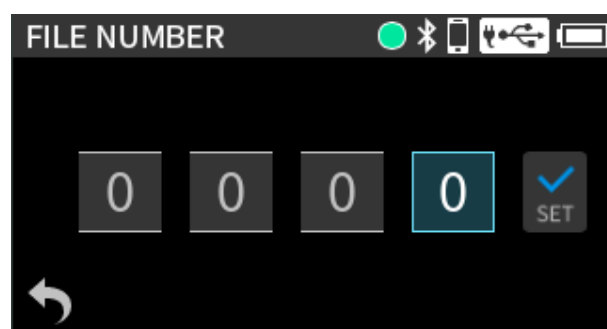
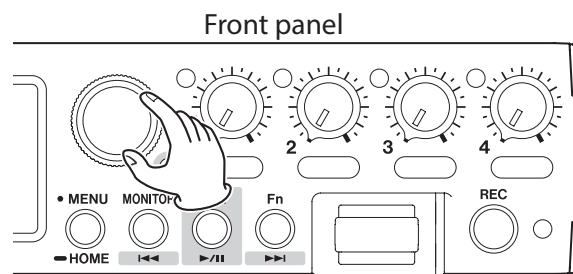


2. Press the DATA dial to confirm.

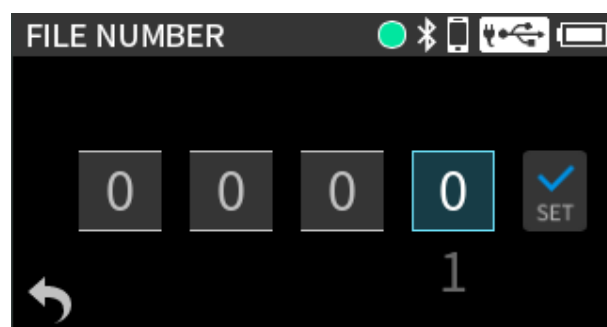
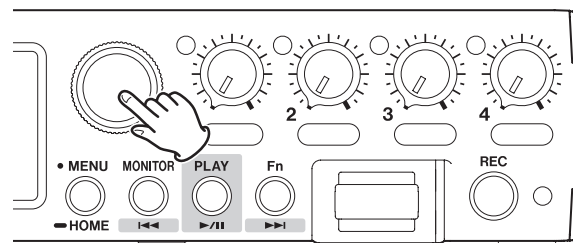


2. Names and functions of parts

- 3.** Turn the DATA dial to change the value.

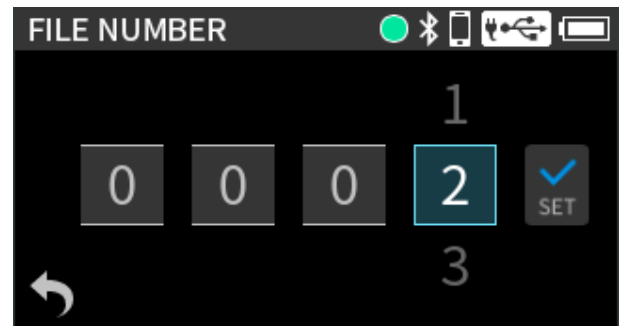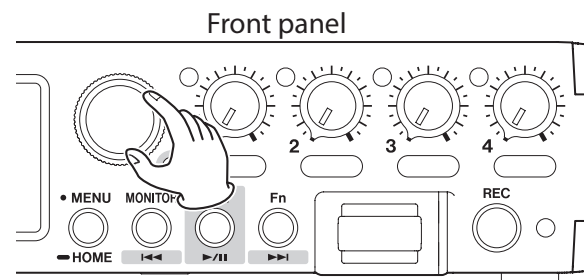

- 4.** Press the DATA dial to confirm the selected value.

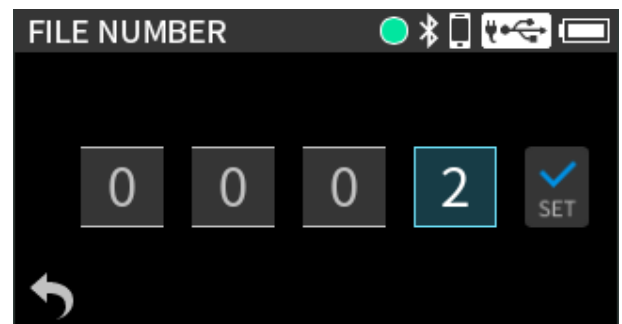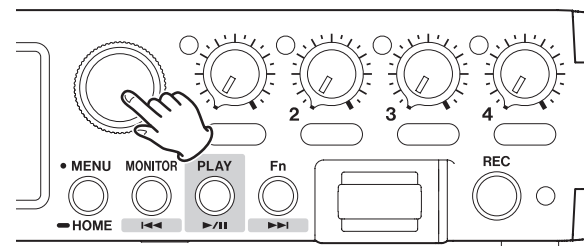

- 5.** Set other digits in the same manner.
- 6.** When done setting, select "SET" and press the DATA dial.


2. Names and functions of parts

Assigning the Fn button function

The function of the Fn button when pressed can be changed.

Press the MENU button and use PREFERENCES > Fn KEY to set it.


1. Press the MENU button.

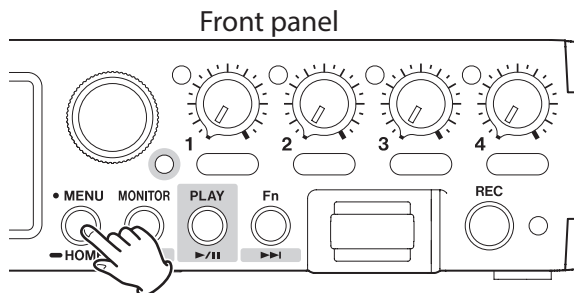


2. Tap "PREFERENCES".



3. Tap "Fn KEY".

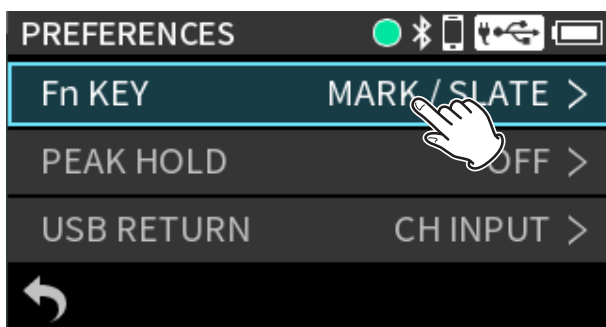

4. Tap the function to assign to the Fn button.

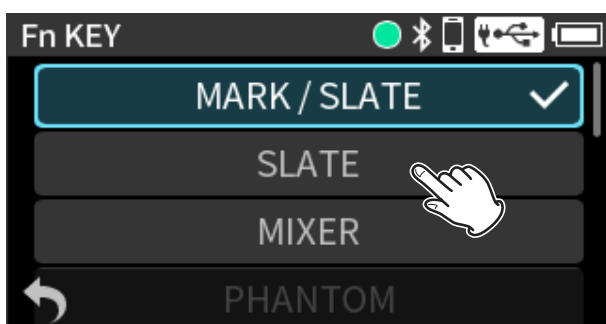

MARK/SLATE (default)

Press it briefly to add a mark or press and hold it to add a slate tone.

SLATE

Press briefly or press and hold to add a slate tone.

MIXER

This opens the Mixer Screen. (See "3-8. Mixer Screen" on page 59.)

PHANTOM

This opens the PHANTOM Screen.

PHONES VOLUME

This opens the PHONES VOLUME Screen.

BLUETOOTH

This opens the Bluetooth Screen. (See "13-2. Installing a Bluetooth® adapter" on page 114.)

BROWSE

This opens the Browse Screen. (See "9-5. Using the BROWSE Screen" on page 99.)

SD CARD

This opens the SD Card Screen. (See "Setting this unit for use as a card reader" on page 108.)

TIMECODE

This opens the Timecode Screen. (See "14. Timecode functions" on page 119.)

HDMI

This opens the HDMI OUTPUT ASSIGN Screen. (See "5-7. Outputting audio from this unit using HDMI®" on page 86.)

AUTO MIXER


This opens the AUTO MIXER Screen. (See "AUTO MIXER function overview" on page 139.)

When set to anything other than MARK/SLATE or SLATE, pressing it briefly will move to that screen. Pressing it when that screen is open will return to the previous screen.

NOTE

Marks will also be placed at positions where slate tones are added.

3-1. Opening and closing the rear cover

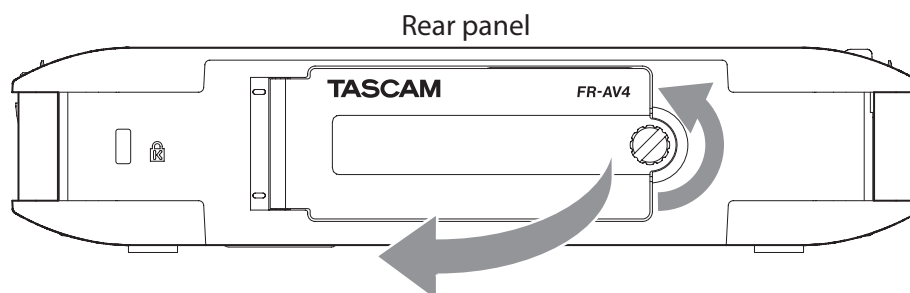


Reverse the opening procedures to close the cover.

Always close the cover before using this unit.

3-2. Inserting and removing SD cards

Inserting SD cards

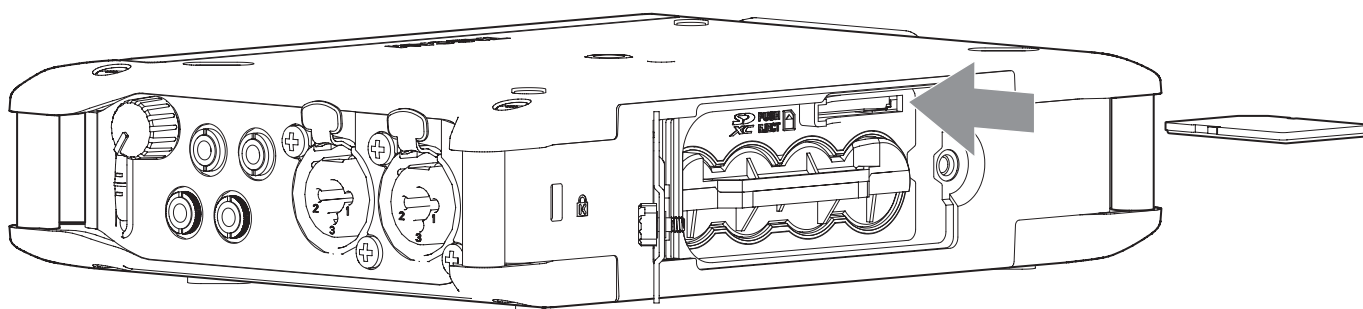

To remove an SD card, press it in gently and then pull it out.

3. Preparation

3-3. Preparing the power supply

Notes about power supplies

Supply power with one of the following methods when using this unit.


- 4 AA batteries
- AC adapter (TASCAM PS-P520U)
- USB cable (USB bus power supply)

NOTE


- Alkaline, Ni-MH or lithium AA batteries can be used.
- This unit does not have a battery charging function when using an AC adapter.

Using AA batteries

1. Open the rear cover and remove the battery holder.

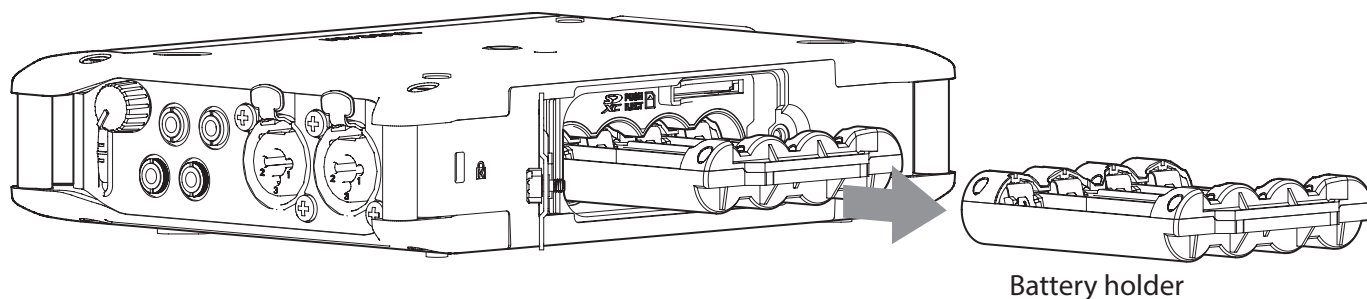

2. Install batteries with their ⊕ and ⊖ marks as shown in the battery holder. Then, reinstall the case in the unit.

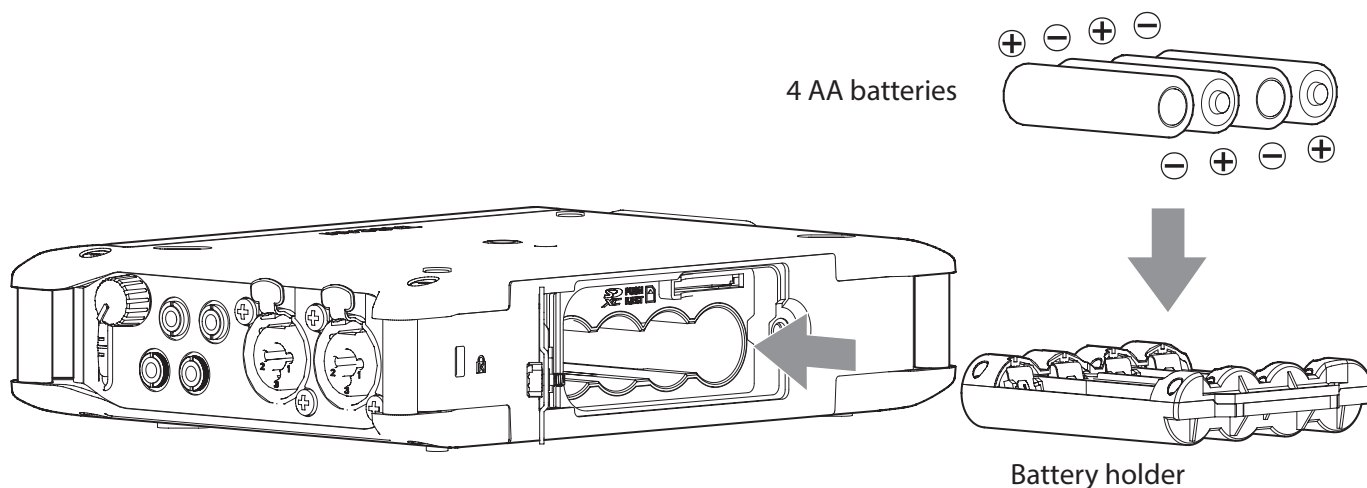


3. Close the back cover and tighten the screw.

NOTE

For operation over a long time, we recommend using a PS-P520U AC adapter (sold separately) or another external power supply.


Using an AC adapter (sold separately)

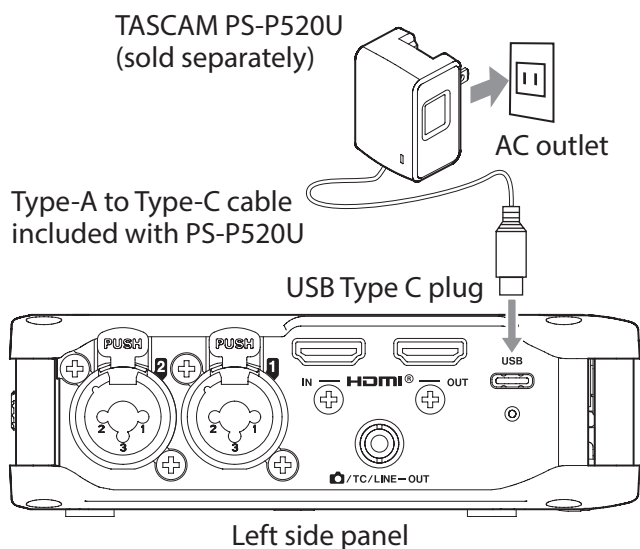


CAUTION

Noise may occur when recording with a microphone if the unit is too close to the AC adapter. In such a case, keep sufficient distance between the AC adapter and the unit.

Using USB bus power

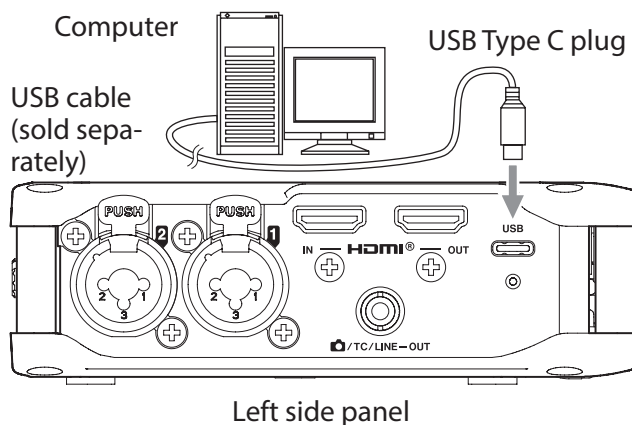

The following pop-up will appear if the unit is unable to determine whether the connected USB power supply has a supply capability of at least 1.5 A.

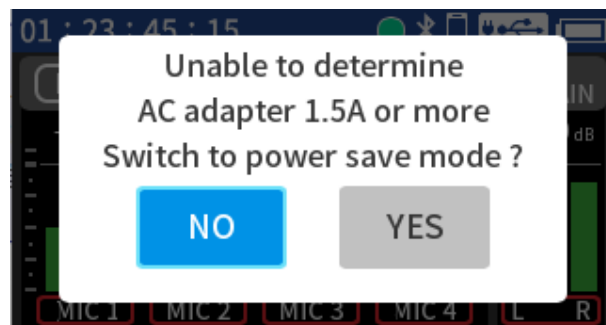

If the connected USB power supply does not have a supply capability of at least 1.5 A, select "YES" and use power save mode. If the connected USB power supply does have a supply capability of at least 1.5 A, select "NO" and use regular mode. (See "16-11. Power saving (energy conservation) mode" on page 133.)

NOTE

- If a computer is going to be used only to supply power, a driver does not need to be installed.
- We recommend connecting it to a USB Type-C port on a computer or other device.


3. Preparation

3-4. Turning the unit on and off

⚠ CAUTION

- Turn down the volume of the sound system connected to the unit before starting up or shutting down the unit.
- Do not wear connected headphones when turning the unit on and off. Noise could damage the headphone driver unit or harm your hearing.


Turning the power on

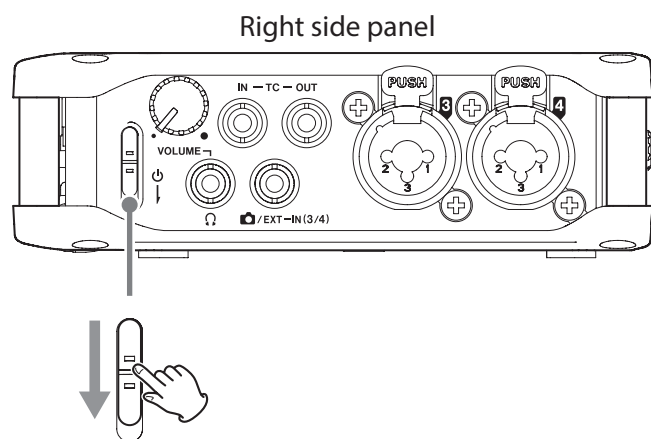

TASCAM
FR-AV4

Release the switch after the start up screen appears.

Turning the power off

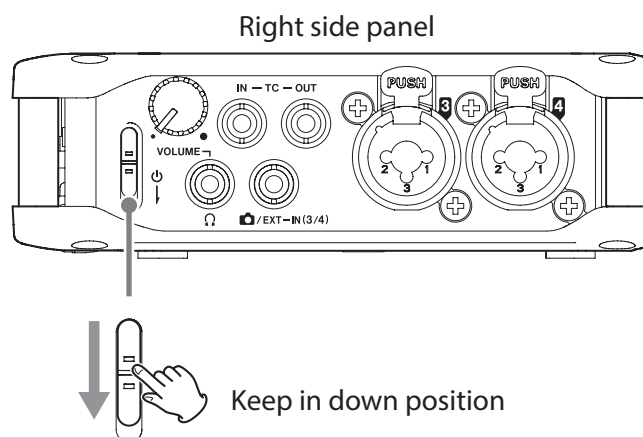


Keep in down position



POWER OFF

Release the switch after the POWER OFF screen appears.

CAUTION

Always use the  switch to turn the unit off. If the unit is not able to conduct shutdown procedures properly, recording data, settings and other changes could be lost. Lost data and settings cannot be restored.

NOTE

The unit cannot be turned off when it is recording.


3-5. Set the date and time

Whenever the date and time have been reset, the DATE/TIME Screen will open.


NOTE

Use the touchscreen or the DATA dial to make settings. See "2-6. Basic operation" on page 36 for details about setting procedures.



1. Tap the area to change.

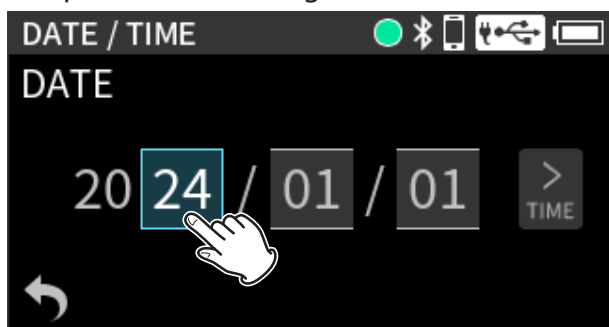

2. Scroll the selected item up and down to select the value.

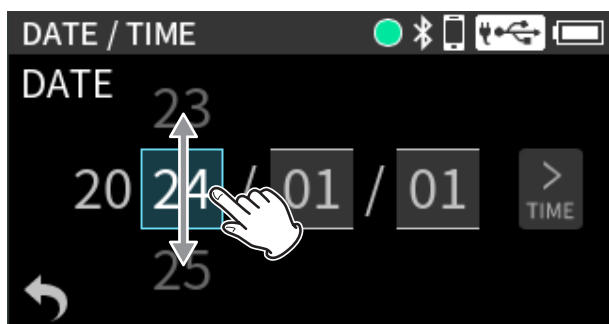


3. Tap the selected value.

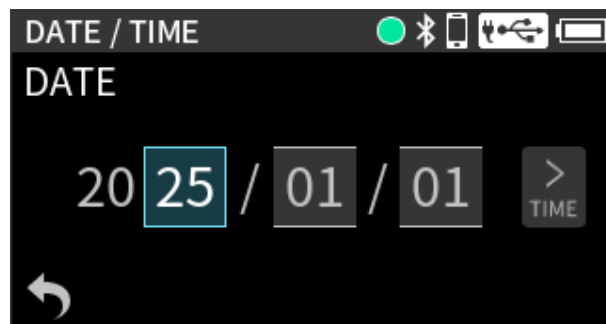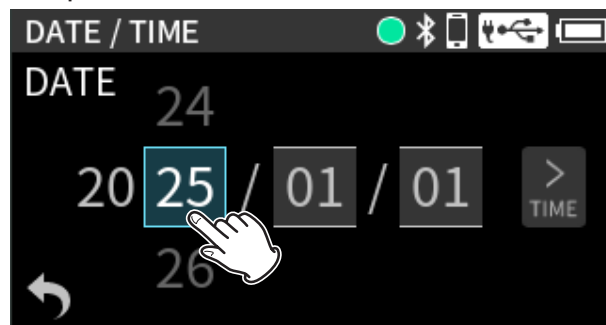


4. Set the month and day in the same manner.

5. Tap "TIME".

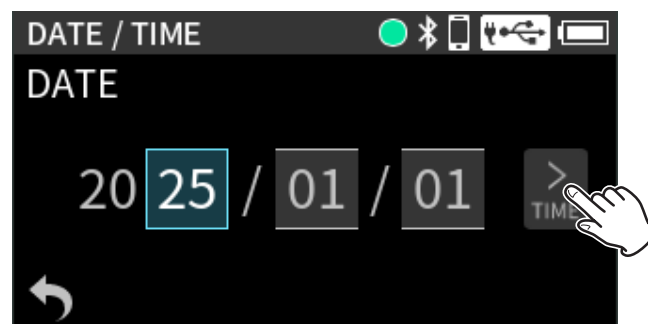


6. Set the hours, minutes and seconds in the same manner.

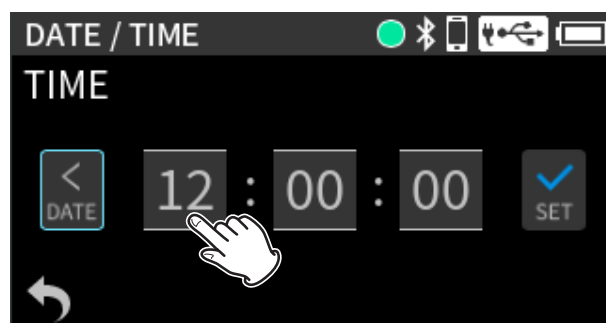

3. Preparation

7. When done setting, tap "SET" to confirm.

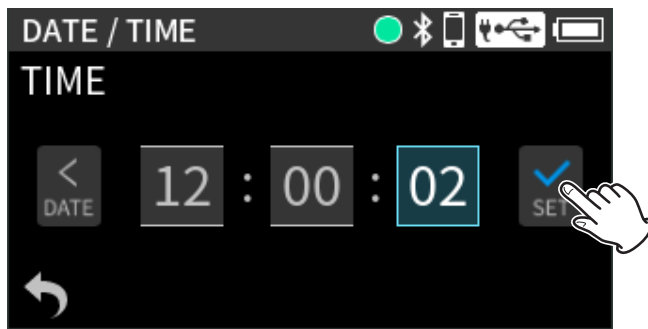


NOTE

- Date and time settings can also be changed by using the following setting item.
MENU > DATE/TIME
- The unit has a built-in rechargeable battery for retaining date and time settings, so the set date and time will be retained even if no AA batteries are installed in the unit.
This rechargeable battery is charged when the unit power is on.

3-6. Formatting (initializing) SD cards

The following message will appear if an unformatted card is loaded.

Tap the OK button to start formatting.

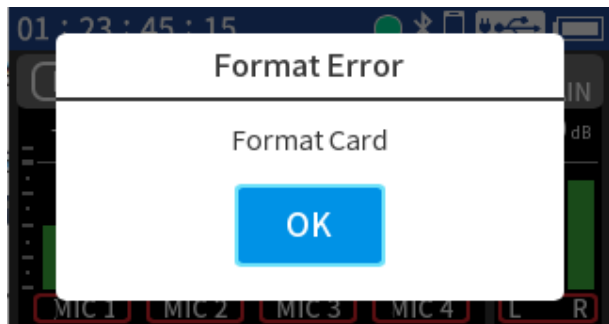


After formatting completes, the Home Screen will open.


The following setting item can also be used for formatting.

MENU > FORMAT SD

1. Tap "QUICK FORMAT" or "ERASE FORMAT".

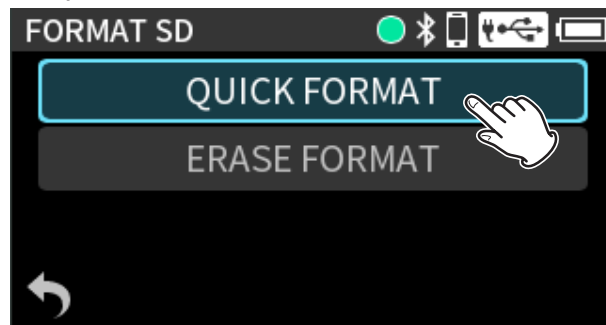

2. Tap the "YES" button.

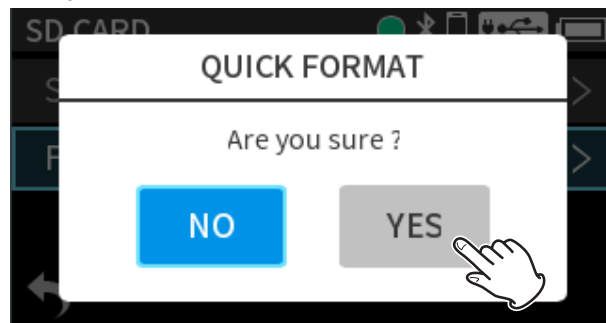

CAUTION

Formatting will erase all the data on the SD card. Back up to a computer, for example before formatting a card.

NOTE

- Using the "ERASE FORMAT" option might improve writing performance that has decreased due to repeated use. If "Write Timeout" or "Card slow Check BOF MARK" messages appear during recording, format the card with "ERASE FORMAT".
- ERASE FORMAT takes more time than QUICK FORMAT.

3. Preparation


3-7. Home Screen

The Home Screen appears after the unit starts up. The composition of the Home Screen changes according to the state.

- When stopped
- When recording
- When stopped, playing, paused or searching forward/backward (using the transport)

Tap the project status bar or press the data dial in any condition to open it and show additional details.

When stopped

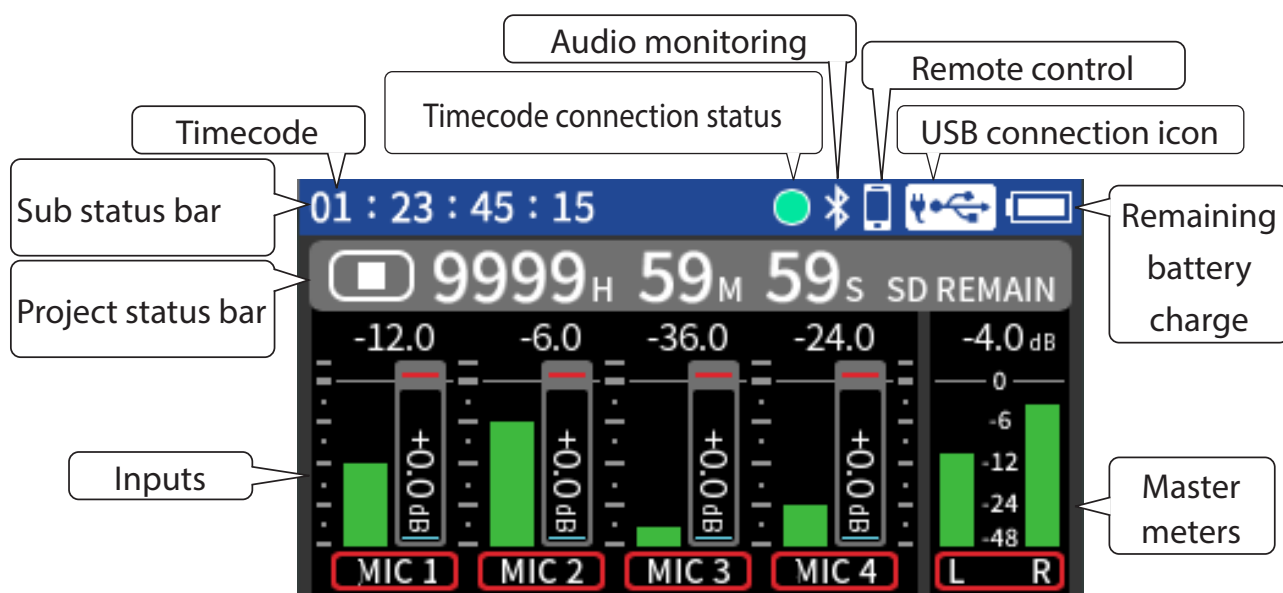

Remaining battery charge

The remaining battery charge is shown when batteries are installed.

	Remaining charge is sufficient
	Remaining charge becoming low
	Remaining charge is very low
	No charge remains (It will also blink in this state.)

USB connection icon

: This appears when connected by USB.

: This appears when powered by USB.

This will blink when the sampling frequency settings of this unit and the USB computer audio interface are not the same.

See "12. USB connection" on page 108 for details about USB connection settings.

Project status bar

This shows operation state icons, the time of the recording/playback position and remaining SD card capacity, for example.

Status	Indicator
Stopped	■
Recording	●
Playing	▶
Paused	⏸




Inputs

This shows input settings and levels.

Timecode

This shows the timecode. (See "14-5. COUNTER VIEW" on page 122.)


Timecode connection status

Blinking green*		Receiving timecode and operating with synchronization
Blinking red*		Running by itself based on the last received timecode
Unlit		Not operating with timecode

* Blinks when connected to AtomX SYNC/UltraSync BLUE



Audio monitoring

This shows the connection status of wireless audio monitoring equipment. (See “15-1. Wireless audio monitoring” on page 124.)

Status	Indicator
Connected	
Disconnected	No indicator

REMOTE CONTROL

This shows the connection status of remote control devices. (See “13-3. Connecting with the dedicated control app” on page 115.)


BLUETOOTH	Status	Indicator
REMOTE CONTROL On	Not connected	 blinking
	Connected	 lit
REMOTE CONTROL Off	—	No indicator

Master meters

This shows mixer master track settings and levels.

3. Preparation

Detail display

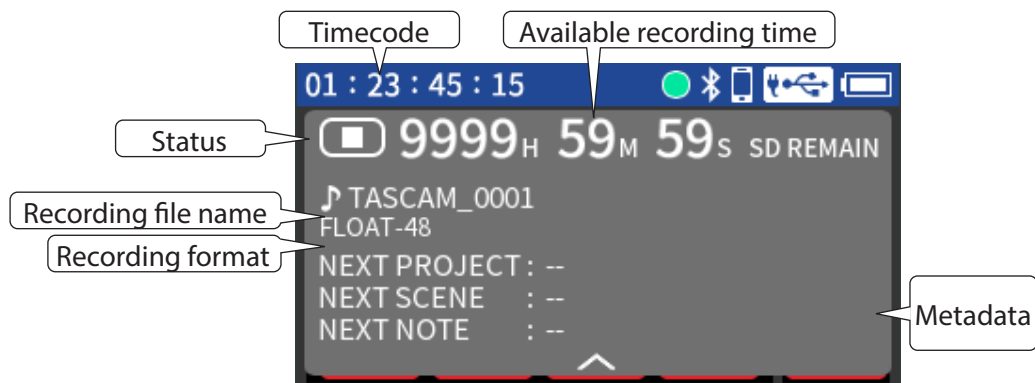


To close the detail display, tap the \wedge in the bottom middle of the screen or press the DATA dial.


Metadata

This shows the PROJECT, SCENE and NOTE metadata that were set using the remote app and will be used when next recording.

When recording

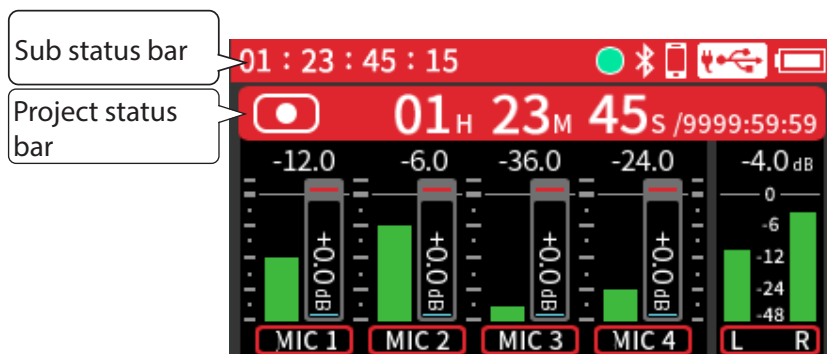

Detail display

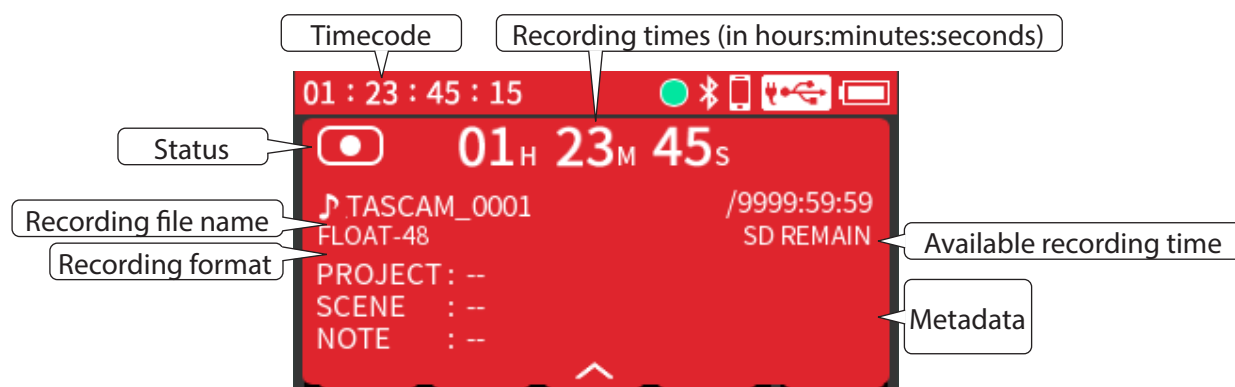


To close the detail display, tap the \wedge in the bottom middle of the screen or press the DATA dial.

Metadata


This shows the PROJECT, SCENE and NOTE metadata that were set using the remote app and will be used when next recording.

3. Preparation

When stopped, playing, paused or searching forward/backward (using the transport)

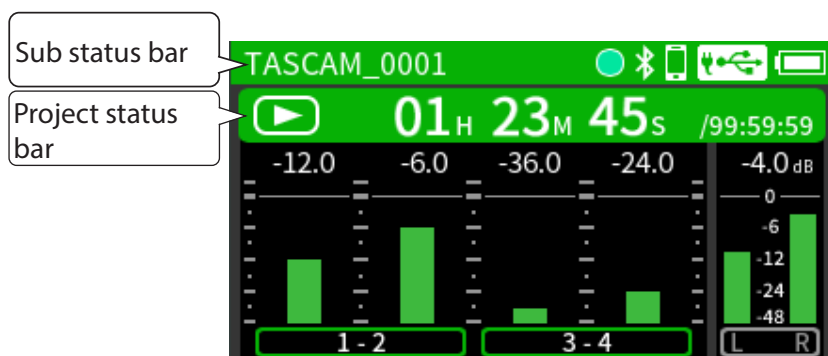

Detail display

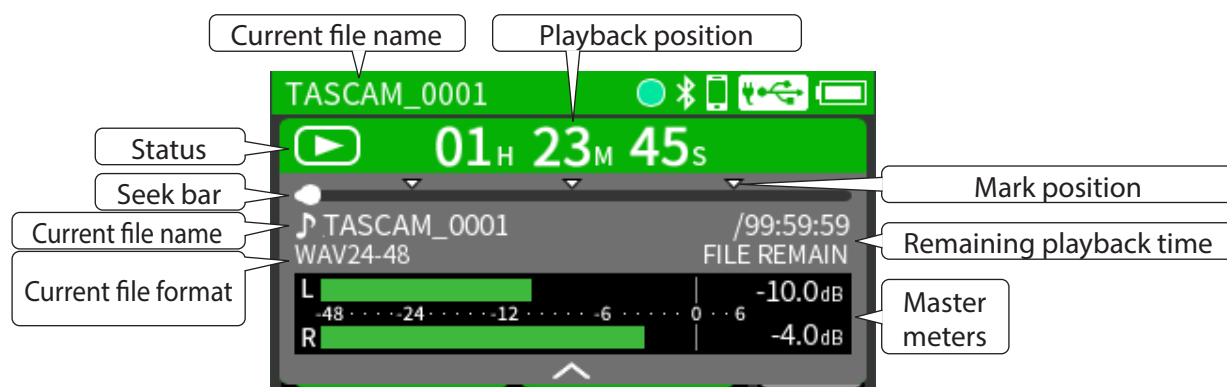

Mark position


If the currently playing file has marks, this shows their positions.

Button	Function
▶ /	Press this when stopped to start playback. Press during playback to pause.
MONITOR / ◀◀	Skip to the beginning of the previous audio file Skip to the file beginning (if the playback position is not already there)
Fn / ▶▶	Skip to the beginning of the next audio file

3-8. Mixer Screen


The mix balance of the tracks can be adjusted.

Swipe left on the Home Screen to switch to the Mixer Screen.

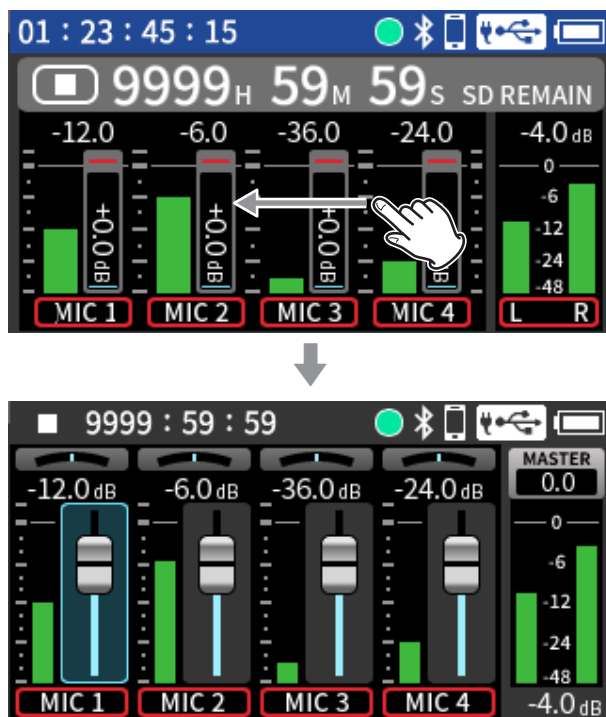

NOTE


- The Mixer Screen can also be opened by pressing the MENU button and selecting MIXER.
- The Mixer Screen cannot be opened when ambisonic mode is on. (See “16-7. Ambisonic mode” on page 131.)

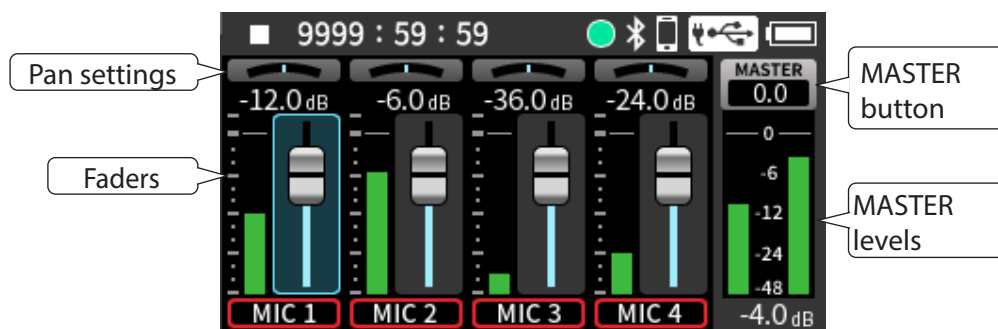


3. Preparation

Panning

Use these to adjust the left-right volume balance of each track.

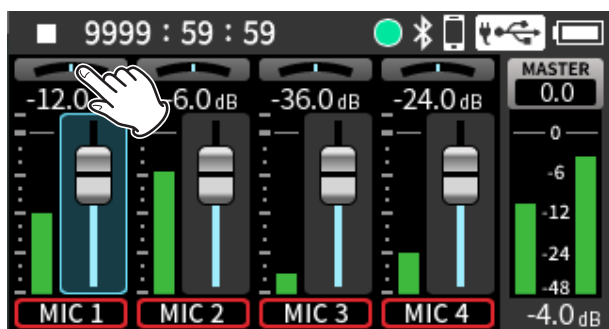


Tap the pan setting for the channel to adjust.

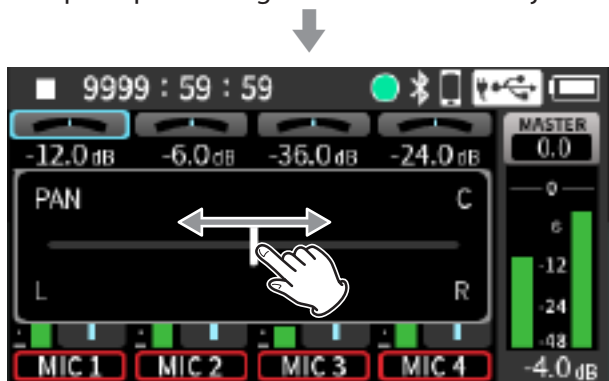


Faders

Use these to adjust the output levels of each track.

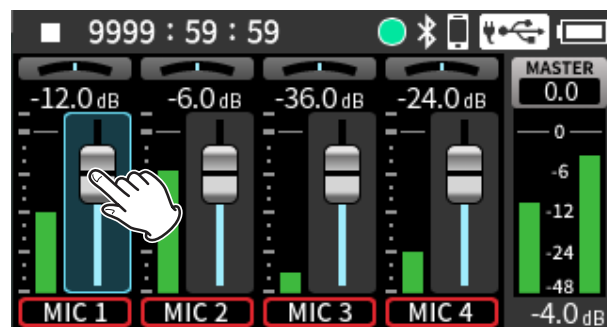


Tap the fader for the channel to adjust.

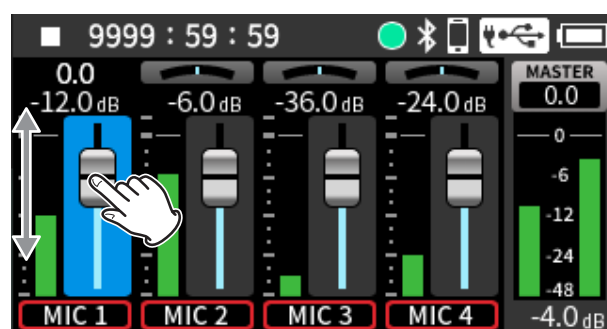


Slide the faders to adjust the balance of levels sent to the MASTER.

MASTER button

Tap the MASTER button to show master fader and REC ENABLE settings.

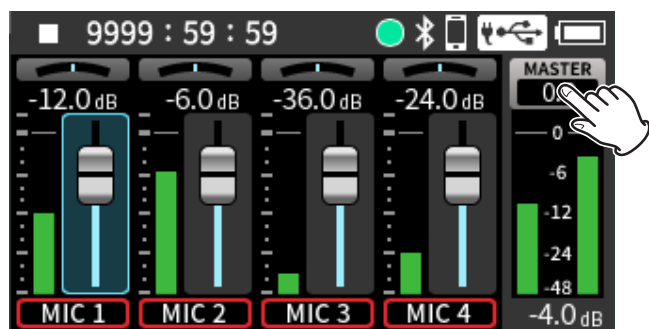

Tap the MASTER button.

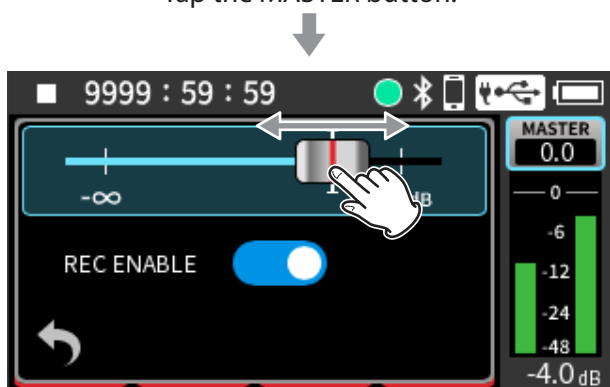

Slide the fader left and right to adjust the level.

Use this to adjust the level of the mix of all tracks.
After adjusting the balance of the individual track levels,
use this when you want to adjust the overall level.

- Turn off REC ENABLE to disable recording of the master track.
- Panning can be set to the center by double tapping the PAN slider.
- Faders can be set to 0 dB by double tapping them.


4. Connections

4-1. Mics

Make input settings according to the connected equipment. See “5-1. Making input settings for each input” on page 71 for details.

Connecting microphones

Example connecting to input jacks 1–2

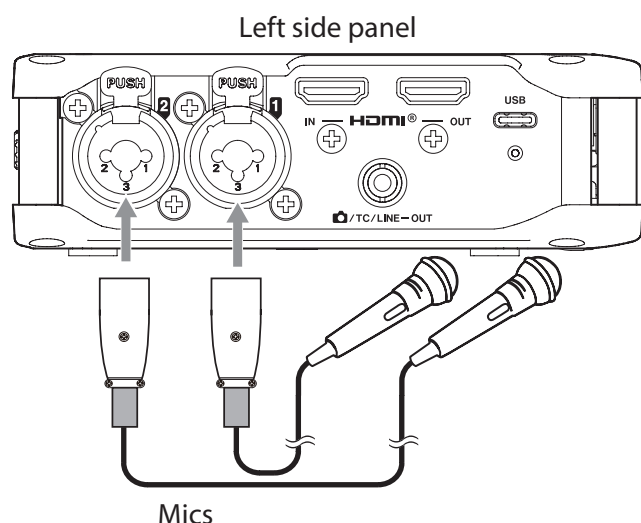

After connecting a mic, press the MENU button and select “MIC” for the INPUT setting. (See “5-1. Making input settings for each input” on page 71.)


NOTE

- Input jacks 3–4 are on the right side. Set them in the same way as necessary.
- Make phantom power settings when using a mic that requires phantom power. (See “Using phantom power” on page 17.)
- When TRS plugs are connected to input jacks 1/2 or 3/4, phantom power will not be supplied.
- When connecting a device with unbalanced output, use the /EXT/TC IN jack.

Connecting mics that use plug-in power

Connect the mic to the /EXT/IN (3/4) jack. Stereo and mono mics are supported. Signals connected to the /EXT IN (3/4) jack will be input on input channels 3/4 of this unit.

See “Setting plug-in power” on page 75 for details about plug-in power settings.

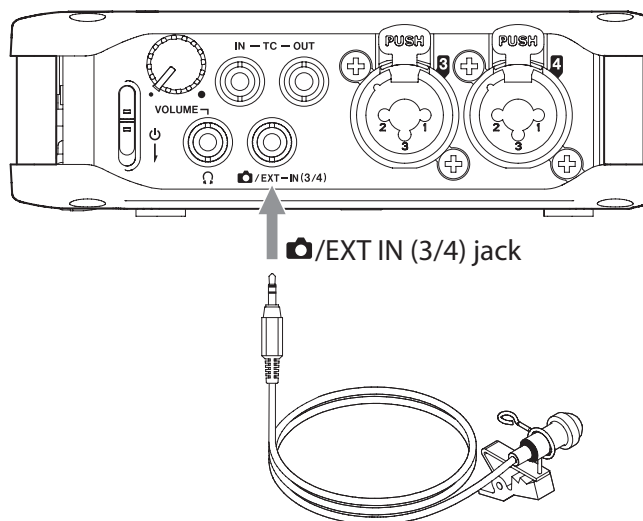

Mic that requires plug-in power

Connecting mid-side mics

Mid-side mics can be connected to input jacks 1 and 2 or 3 and 4.

Connect the mid-side mic mid to input jack 1 or 3 and the side to input jack 2 or 4.

After connecting the mics, press the MENU button and set MS DECODE/AMBISONICS > MS DECODE to “REC” or “MONITOR”.

See “5-6. Using the mid-side decoding function” on page 85 for details about recording with mid-side mics.

Connecting ambisonic microphones

These mics can be connected to input jacks 1, 2, 3 and 4.

After connecting the mics, press the MENU button and set MS DECODE/AMBISONICS > AMBISONICS.


See “16-7. Ambisonic mode” on page 131 for details about recording with ambisonic mics.

Connecting other equipment

When connecting 3.5mm stereo mini cables

Connect it to the /EXT/IN (3/4) jack. Signals connected to the /EXT IN (3/4) jack will be input on input channels 3/4 of this unit.



After connecting, press the MENU button and select "EXT" for the INPUT > INPUT setting. (See "5-1. Making input settings for each input" on page 71.)

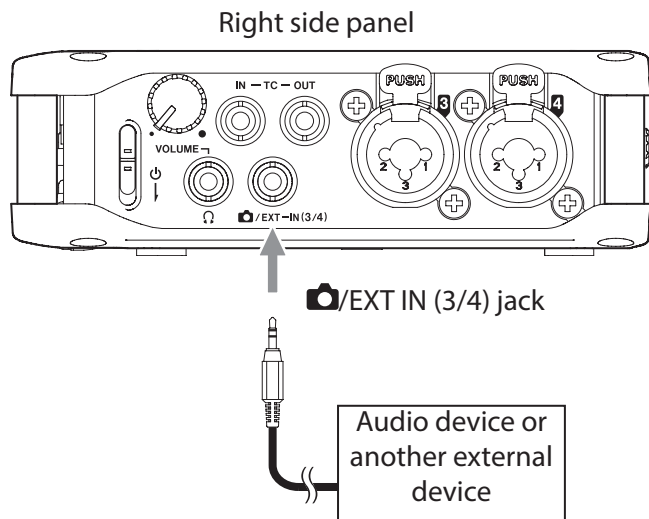

When connecting XLR plugs

Connect them to the 1–4 input jacks.

After connecting, press the MENU button and select "LINE" for the INPUT > INPUT setting. (See "5-1. Making input settings for each input" on page 71.)

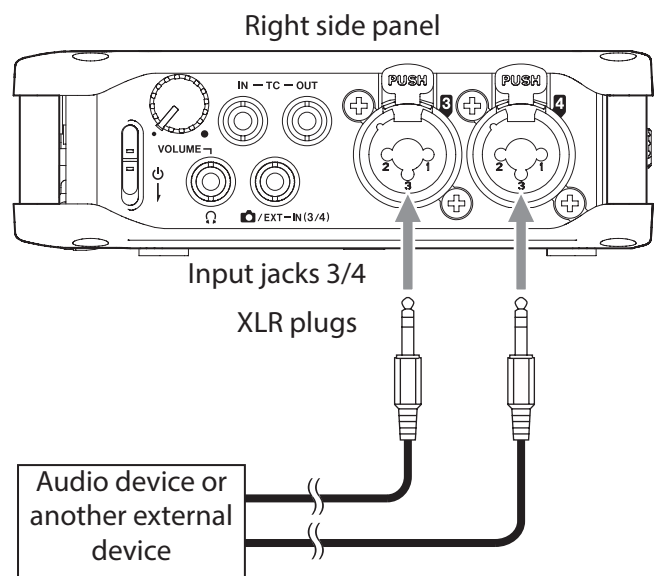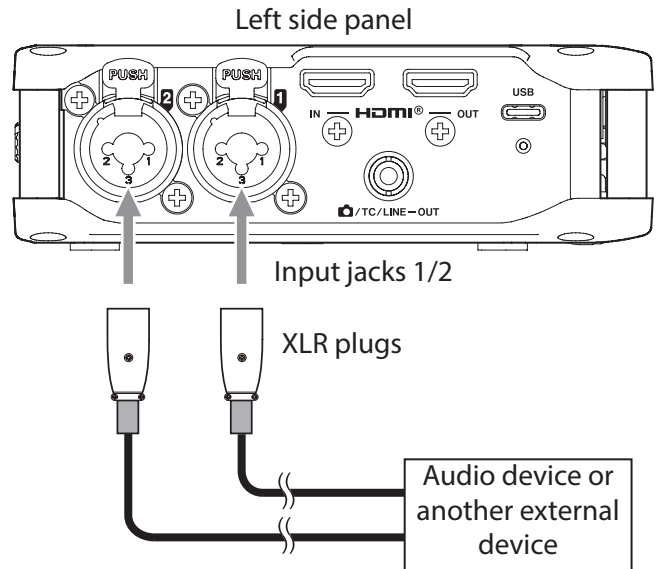

XLR jacks: XLR-3-31 equivalent (1: GND, 2: HOT, 3: COLD)


TRS jacks: 6.3mm (1/4") standard TRS jacks
(Tip: HOT, Ring: COLD, Sleeve: GND)

4. Connections

4-2. Cameras

When recording video with a camera, the same sound can be recorded simultaneously by the camera and this unit. In order to output sound to a camera, connect it with this device as shown below.

HDMI® monitor/recorder

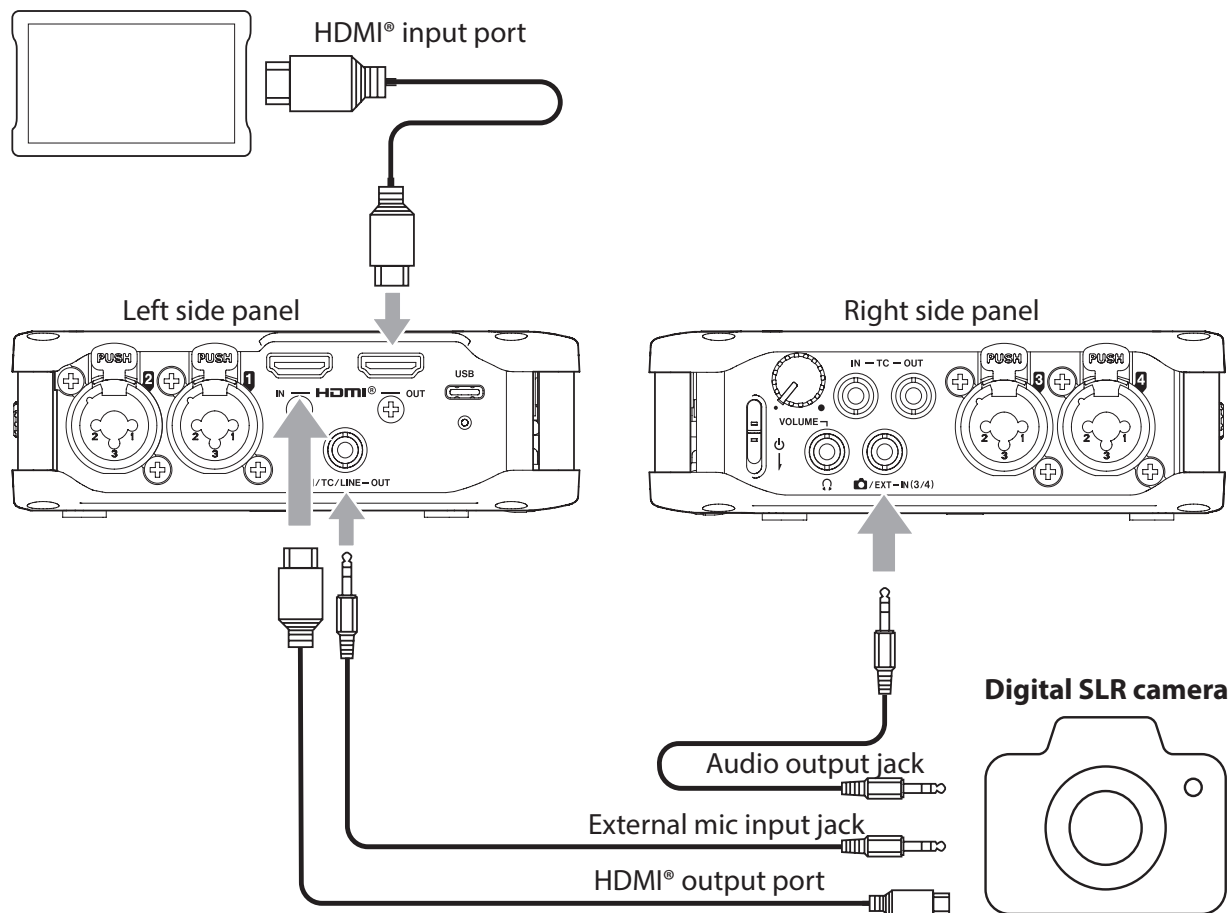

Recording audio from this unit on a camera

Use a commercially-available 3.5mm stereo mini plug cable to connect the /TC/LINE OUT jack on the left side of this unit with the external mic input on the camera.

Connecting with a camera using HDMI®

This unit can be synchronized with a camera's clock by connecting the camera's HDMI® output to this unit's HDMI® IN port. Moreover, HDMI® timecode can be received from a camera.

Connecting HDMI® monitors/recorders

Video input from the camera by HDMI® can have audio recorded by this unit added to it and then be output from the HDMI® OUT port. The received HDMI® timecode can also be output.

NOTE


- Refer to the camera's operation manual to identify this connector on the camera.
- To mount a camera on this unit, use the camera attachment screw on the top of the unit.

Setting output for camera use

The line output level can be attenuated up to 80 dB for camera use.

See "11-1. Setting output for camera use" on page 106 for details.

4-3. Cascade connection

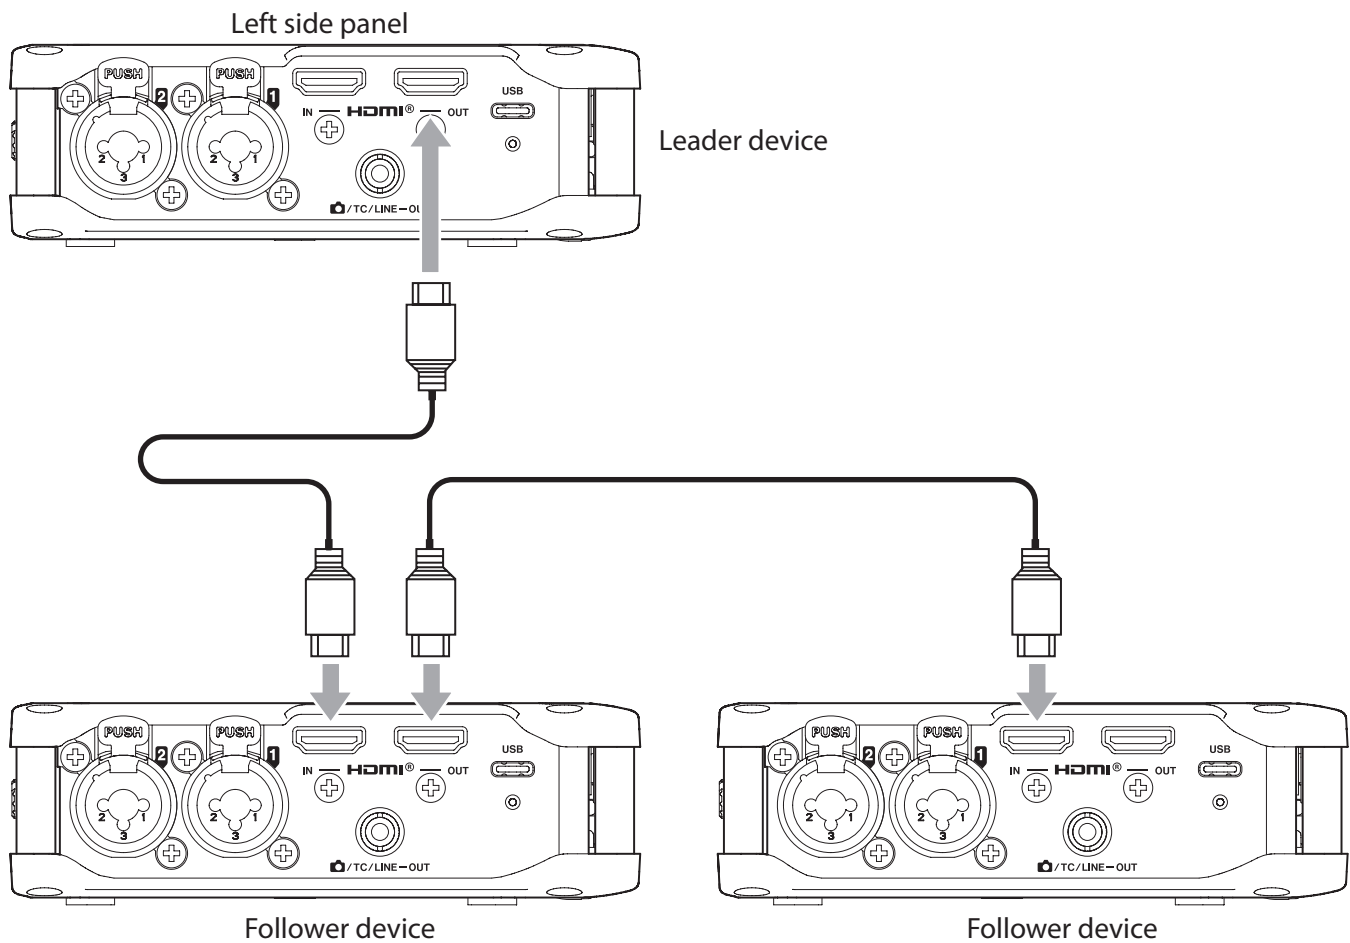

Cascade operation of multiple FR-AV4 units possible by connecting them with HDMI® cables.

Cascade operation has the following benefits.

- Recording/stopping operations on the leader FR-AV4 can be executed simultaneously on follower devices.
- Even over long periods of recording, time, lags will not occur between audio files thanks to digital clock synchronization.
- Sharing timecode using HDMI® connection makes aligning recorded audio files easy.
- Since audio can also be output through HDMI® connections, audio monitoring from the last follower unit is possible without reconnecting headphones.

TIP

A camera with HDMI® output can also be used as the leader device in cascade connection.

NOTE


- Set follower devices to synchronize with HDMI® timecode. (See "Receiving timecode by HDMI®" on page 120.)
- To monitor audio using the last follower device, set the preceding devices in the cascade connection to output HDMI®. (See "5-7. Outputting audio from this unit using HDMI®" on page 86.)

4. Connections

4-4. Monitoring equipment

When using an external monitoring system to listen

Connect the external monitoring system (powered monitor speakers or an amplifier and speakers) to the /TC/LINE OUT jack.

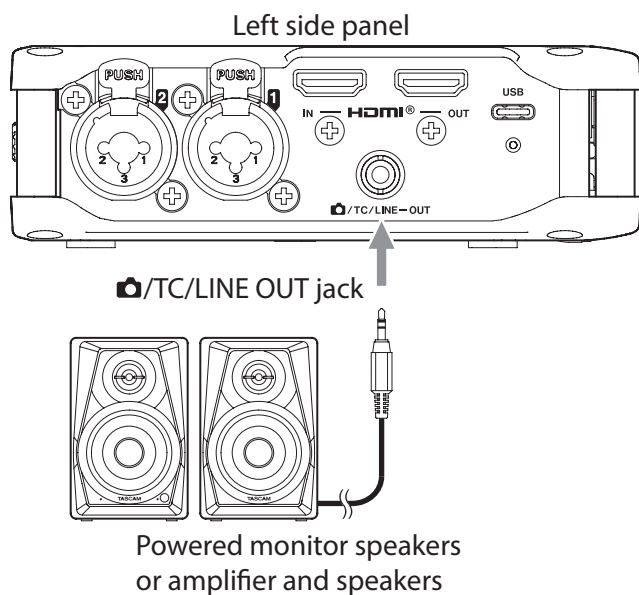


NOTE

When outputting audio from the LINE OUT, turn off timecode output from the LINE OUT jack. See “14-6. Outputting timecode” on page 123 for details.

When using headphones to listen

Connect headphones to the (headphone) jack.

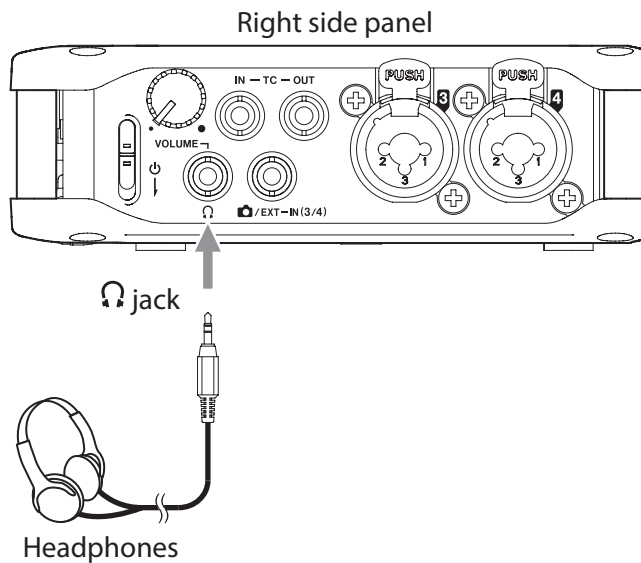

Press the MENU button to open OUTPUT and make settings according to the connected equipment.

⚠ CAUTION

While wearing headphones, do not connect or disconnect them or turn the unit on or off. Doing so might cause sudden loud noises, which could harm hearing.

Before putting headphones on, always lower the volume to the minimum (turn all the way counterclockwise).

4. Connections


4-6. Connecting to a timecode transmitting device

See “14. Timecode functions” on page 119 for details about use.

Receiving timecode

Use a 3.5mm cable (TS or TRS) to connect the output of the timecode transmitting device to the TC IN connector on this unit.


Press the MENU button and set TIMECODE > MASTER to “TC IN (JAM)”. See “Receiving timecode through the TC IN jack” on page 120 for details.

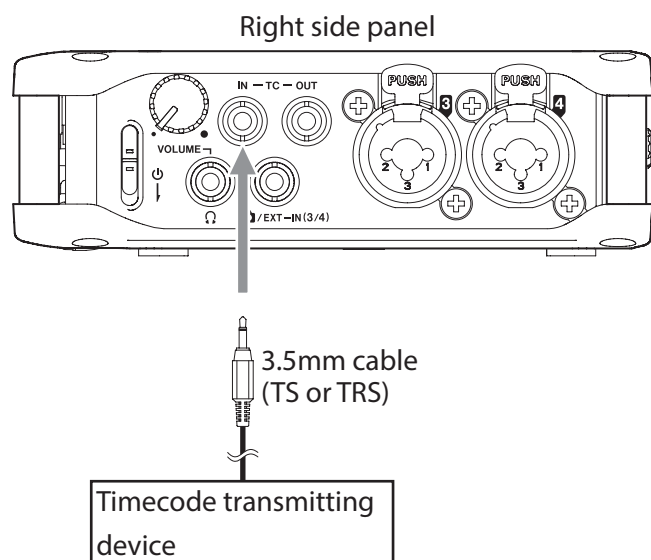

Timecode synchronization is also possible using Bluetooth transmission. See “13-2. Installing a Bluetooth® adapter” on page 114 for details.

Transmitting timecode


This unit can also be used as a timecode generator.

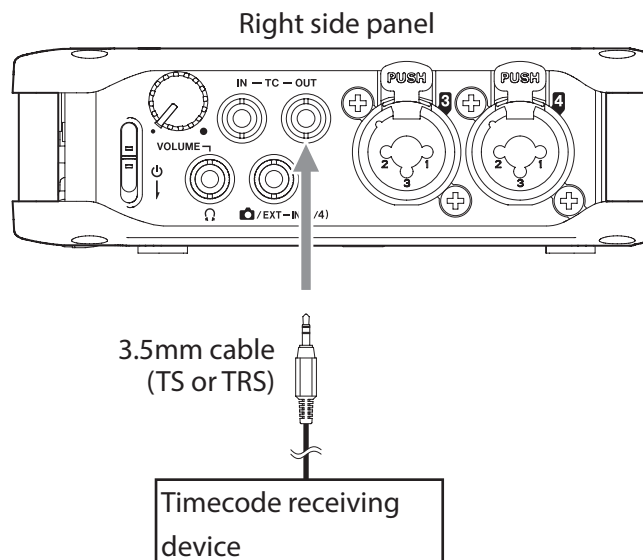

Make timecode output settings in order to transmit timecode. See “14-6. Outputting timecode” on page 123 for details.


Timecode connection examples

1. Using HDMI® timecode

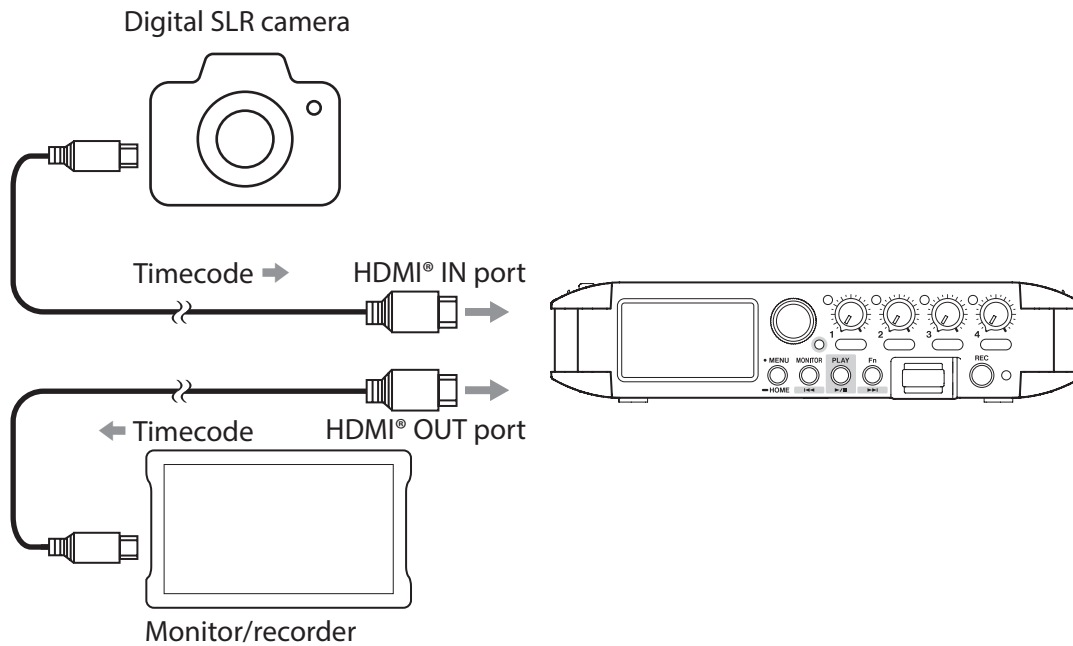

2. Using a timecode generator


Input timecode from an external timecode generator through the TC IN jack. By using jam sync, devices that are synchronized to timecode can also be added.

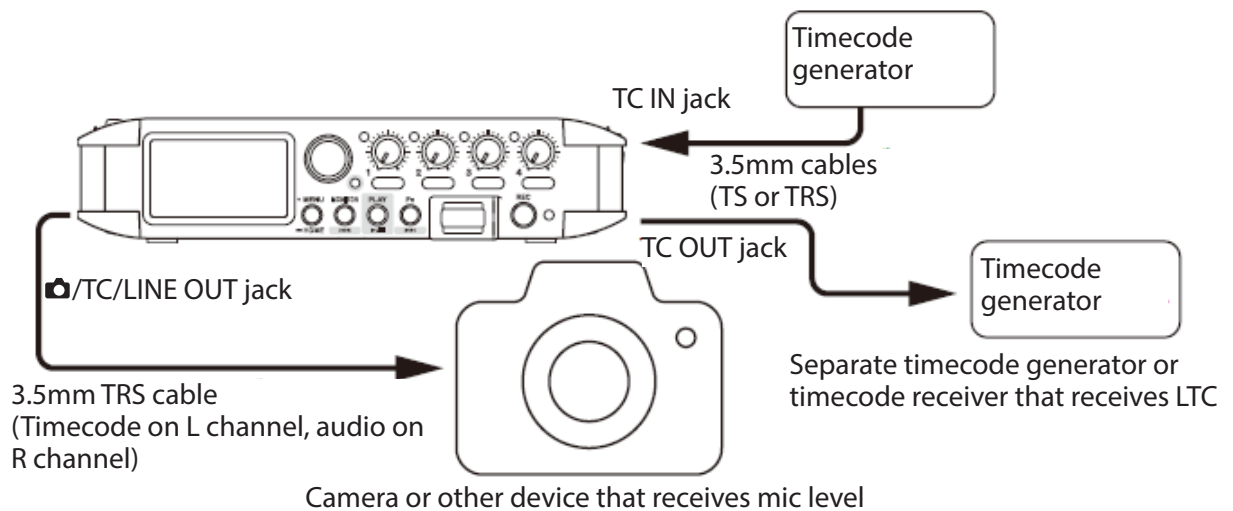

4. Connections

3. Using Atomos UltraSync BLUE

An AK-BT2, which is sold separately, is necessary.

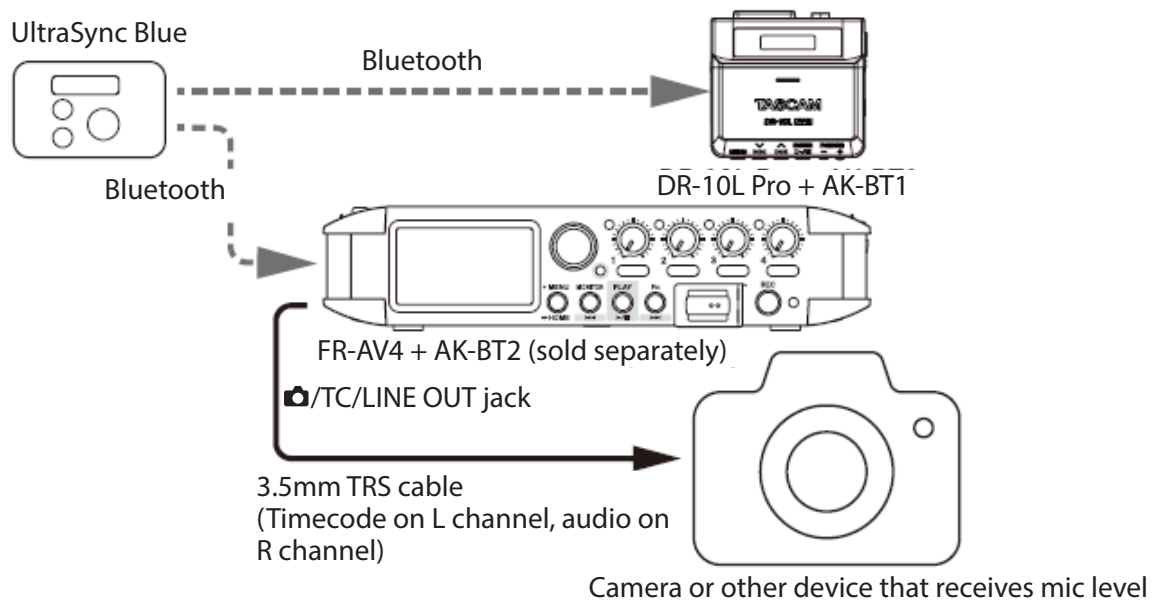

TIP


- After once synchronizing with timecode from an Atomos UltraSync Blue or a timecode generator, along with ordinary connection, it is possible to make it jam sync even if it becomes disconnected by setting it to FREE RUN.
- The FR-AV4 can become a timecode generator and provide timecode to a camera. (See “14. Timecode functions” on page 119.)

5. Input and output settings


5-1. Making input settings for each input

Follow one of the procedures below to open the Input Settings Screen.

- When the Home Screen is open, press the 1, 2, 3 or 4 button on the unit.

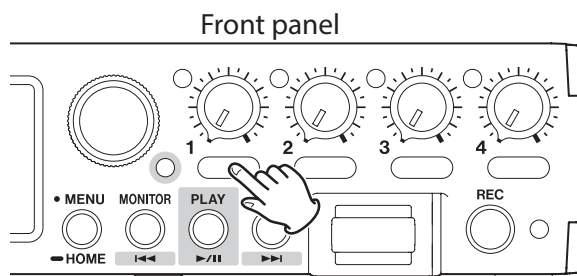

- Tap the desired track when the Home Screen is open.

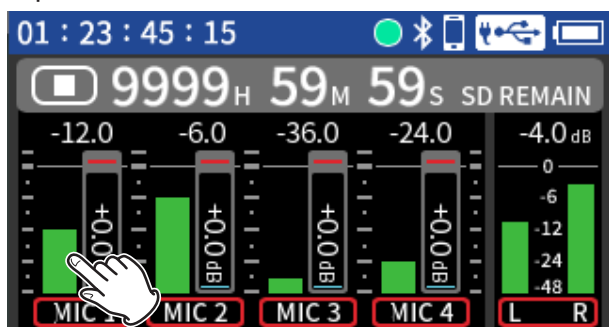


The Input Settings Screen has multiple pages.

Tap the arrows (◀ / ▶) at the bottom of the screen to move between pages.

Enabling channels for input

Set this using CH ENABLE.

Channels can be enabled (on) or disabled (off).

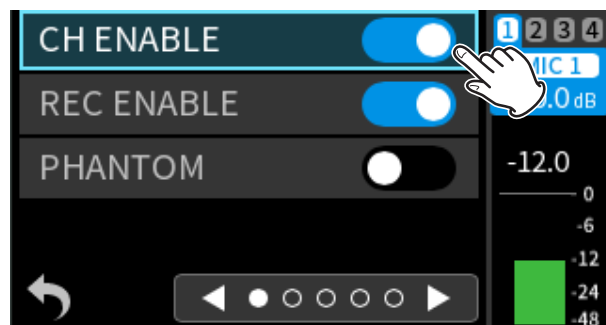

Options: Off, On (default)

NOTE


- REC ENABLE will also be set linked with CH ENABLE. If you want to include the channel sound in the mix, but you do not want to record the channel itself, turn off REC ENABLE only.
- When CH ENABLE is OFF, that channel will appear gray on the Home Screen.

5. I/O SETTINGS

Setting channels to record

Set this using REC ENABLE.

Channels can be enabled (on) or disabled (off) for recording.

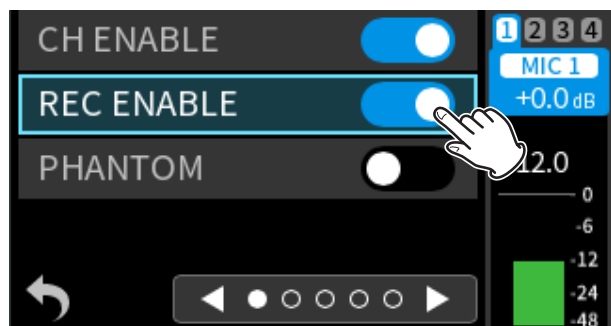


Options: Off, On (default)

Setting input sources

Set this using INPUT.

The input sources of channels can be set.

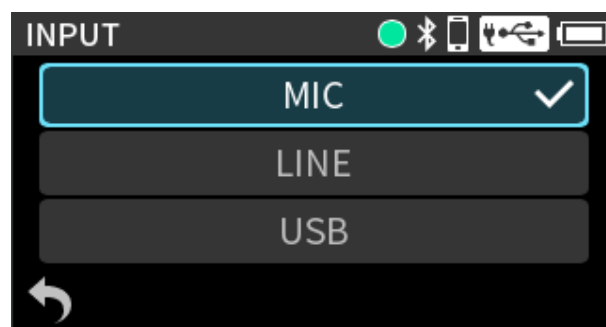

When using input jacks 1–4, select “MIC” or “LINE”.

When using /EXT IN (3/4), select “EXT”.

When using computer output as audio input to this unit, select “USB”.

When not stereo linked

MIC (default), LINE, EXT, USB

When stereo linked

MIC (default), LINE, EXT (ST), EXT (MONO), USB

- When “LINE” is selected, the input signal is attenuated 20 dB.
- “EXT” can only be selected for channels 3 and 4.

NOTE

If MS DECODE or AMBISONICS is enabled, this setting is fixed to “MIC”.

Stereo linking

Set this using STEREO LINK.

Audio from channels 1–2 and 3–4 can be recorded as stereo audio files.


Options: Off (default), On

When STEREO LINK is turned on, the following settings for the odd channel will be applied to the even channel.

INPUT, DELAY, LOW CUT, LIMITER, EQ, NOISE GATE

Appearance when STEREO LINK is on for inputs 1-2

Home Screen when stopped

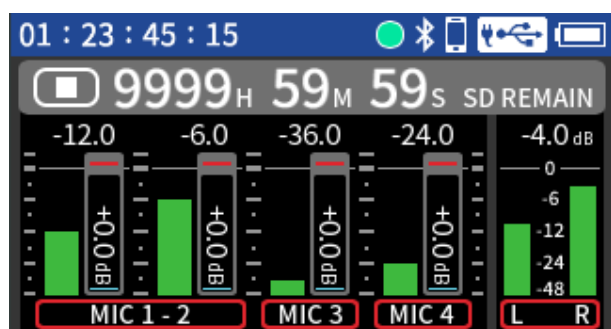


Input Screen



Locking input levels

Set this using KNOB HOLD.

Operation of the 1–4 knobs can be disabled if you do not want input levels to be changed.

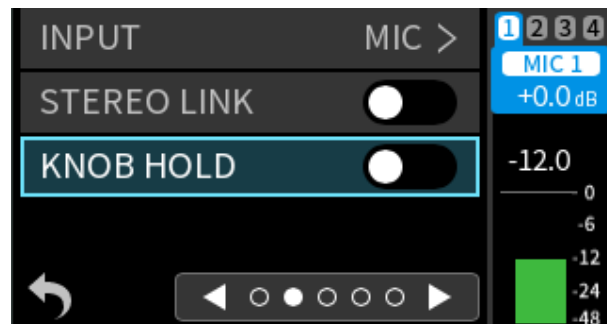

Off (default)

1–4 knobs are enabled

On

1–4 knobs are disabled

TIP

Press and hold the 1–4 buttons to switch the KNOB HOLD setting.


5. I/O SETTINGS

Using phantom power

Set this using PHANTOM.

Make this setting when using mics that require phantom power.

See “Setting the phantom power voltage” on page 75 for details about phantom power voltage settings.

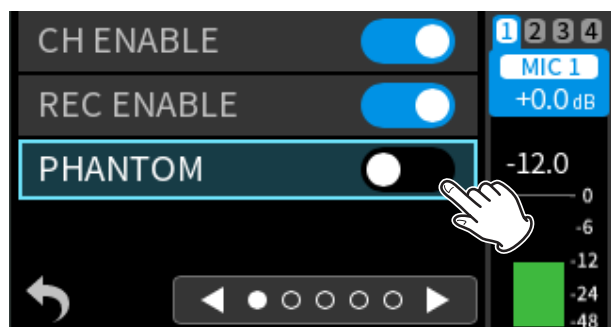

Options: Off (default), On


- Turn on phantom power only when using condenser mics that require phantom power. Turning on phantom power when a dynamic mic or other external device that does not require it is connected could damage this unit and the connected equipment.
- Supplying phantom power to some ribbon mics could break them. If in doubt, never supply phantom power to a ribbon mic.

CAUTION


- Do not connect or disconnect mics while phantom power is on. Doing so could cause a loud noise and might damage this unit and connected equipment.
- Battery operation time will change according to the mics being used. For details, refer to the operation manual of the mic, for example.
- When using phantom power while running on batteries, the operation time of this unit might be reduced greatly depending on the mics being used. We recommend using a TASCAM PS-P520U AC adapter (sold separately). Furthermore, when using an adapter that does not meet the recommended specifications, supplying phantom power to multiple inputs could cause the power to turn off automatically due to insufficient current.
- Do not connect or disconnect the AC adapter when using phantom power. The unit could turn off even when batteries are installed, resulting in recorded data becoming damaged or lost.
- When using USB bus power, the unit might not be able to supply phantom power if the USB output current used is less than 1.5 A. In this case, set the unit to use battery power. (See “16-8. Selecting the power source” on page 132.)

Checking and setting phantom power

Press the MENU button and select PHANTOM to show the PHANTOM setting status for all inputs and enable changing them.

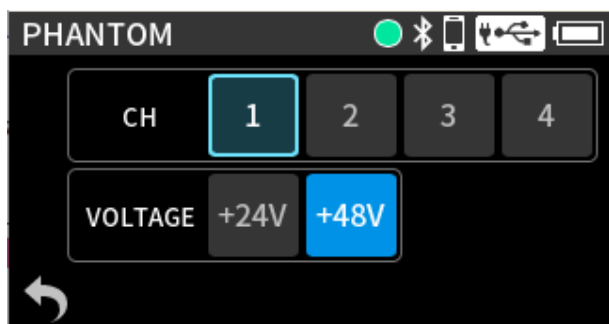


Phantom power can be turned on for each input by selecting it.

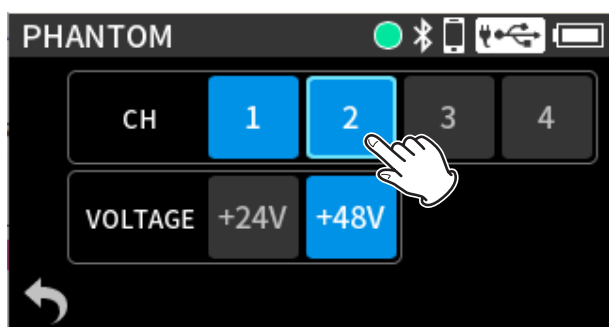

Setting the phantom power voltage

Options: +24V, +48V (default)

Select this according to the specifications of the mic.

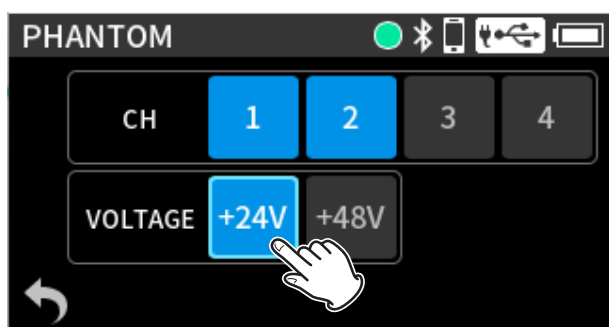

CAUTION

Some condenser microphones will not operate when phantom power is set to "+24V".

Setting plug-in power

Set this using PLUG IN POWER.

Options: OFF (default), 2.5V, 5V

When connecting a mic that requires plug-in power, set this to "2.5V" or "5V" according to the specifications of that mic.

CAUTION

Do not turn plug-in power on unless a plug-in power mic is connected. Other connected equipment could be damaged by it.

See the mic operation manual for details.

NOTE

This setting is only valid when the input source setting is "EXT".

Compensating for delay between different mic distances

Set this using DELAY.

Use this function to compensate for delays that result from differences in distances between connected mics.

Options: 0 (default) – 300 ms

NOTE

This cannot be used when the sampling frequency is set to 192 kHz.

5. I/O SETTINGS

Setting the low-cut filter

Set this using LOW CUT.

This cuts audio below the selected frequency.

The low-cut filter can reduce bothersome noise, such as from wind, air-conditioners and projectors. Set the cutoff frequency of the low-cut filter to match the noise.

Options: OFF (default), 40 Hz, 80 Hz, 120 Hz, 220 Hz

NOTE

This cannot be used when the sampling frequency is set to 192 kHz.

Setting the limiter

Set this using LIMITER.

Using the limiter can suppress distortion caused by sudden excessive sound input.

Off (default)

The limiter function is disabled.

On

This function prevents distortion when signals that are too loud are input suddenly.

This is suited for recording live performances and other situations with large volume changes.

CAUTION

Distortion could occur when the input sound is excessively loud even if the limiter function is on. In such cases, lower the input level or increase the distance between the unit and the sound source.


NOTE

This cannot be used when the sampling frequency is set to 192 kHz.

Setting the equalizer

Set this using EQ.

The equalizer has the effect of amplifying and attenuating specific frequency ranges. This can be used, for example, to enhance the sound of individual instruments, to adjust the balance of a wide frequency range and to cut specific unwanted frequencies.

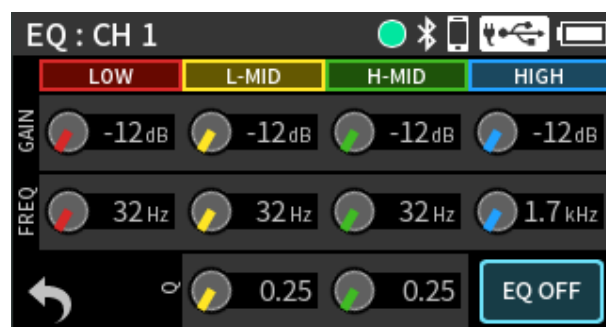

OFF (default)

This disables the equalizer.

ON

With this setting, four bands can be adjusted manually. In addition to low-frequency and high-frequency boosts, two peak curves can be set.

Gain knobs (HIGH, H-MID (high mid), L-MID (low mid), LOW)

These set the amounts levels are increased or decreased for each band.

Ranges

GAIN: -12 dB – +12 dB (0 dB default)

FREQ knobs (HIGH, H-MID (high mid), L-MID (low mid), LOW)

These set the cutoff frequencies of the HIGH and LOW bands and the middle frequencies of the H-MID and L-MID bands.

Ranges

HIGH: 1.7 kHz – 18.0 kHz (5.5 kHz default)

H-MID: 32 Hz – 18.0 kHz (1.7 kHz default)

L-MID: 32 Hz – 18.0 kHz (1.7 kHz default)

LOW: 32 Hz – 1.6 kHz (400 Hz default)

Q knobs (H-MID (high mid), L-MID (low mid))

These set the acuteness of these bands.

The higher the value is the more acute it becomes, making it affect a narrower frequency band around the set frequency. The lower the value is the less acute it becomes, making it affect a broader frequency band around the set frequency.




Ranges

H-MID: 0.25 – 16.00 (default 2.00)

L-MID: 0.25 – 16.00 (default 2.00)

NOTE

This cannot be used when the sampling frequency is set to 192 kHz.

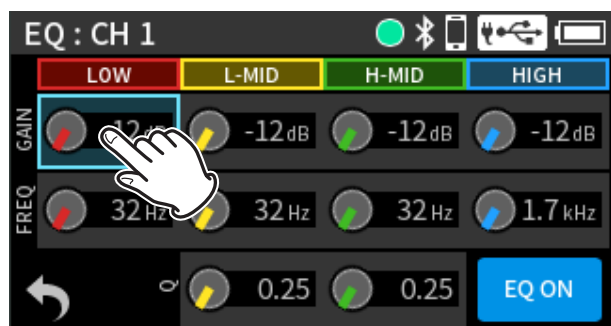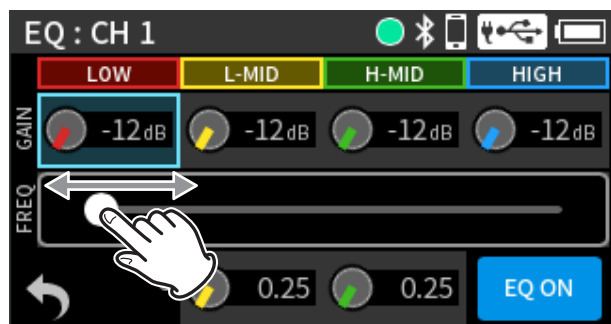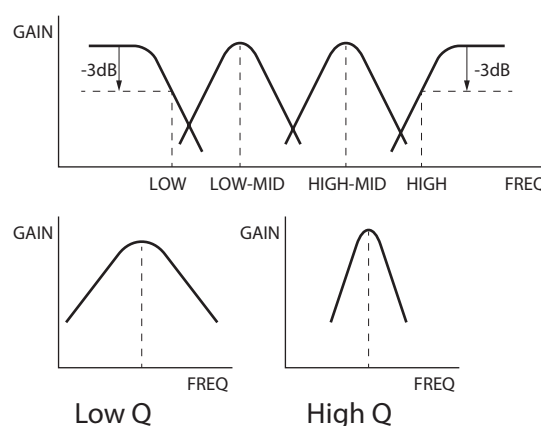1. Tap the knob to be adjusted.**2. Adjust with the slider.****Examples of EQ characteristics**

5. I/O SETTINGS

Setting the noise gate

Set this using NOISE GATE.

Sound below a set level can be muted.

When "LOW" is selected, only quiet sounds will be muted. When "HIGH" is selected, sounds up to a certain level will also be muted.

Options: OFF (default), LOW, MID, HIGH

NOTE

This cannot be used when the sampling frequency is set to 192 kHz.

Inverting the input phase

Set this using PHASE INVERT.

Turning this on will invert the phase.


Options: Off (default), On

TIP


If the sound seems to be unclear when recording the same source with more than two or more mics, inverting the phase of one or more inputs could improve the sound quality.

Changing the channel being set on the Input Setting Screen

1. Tap the input channel shown at the top right of the screen.

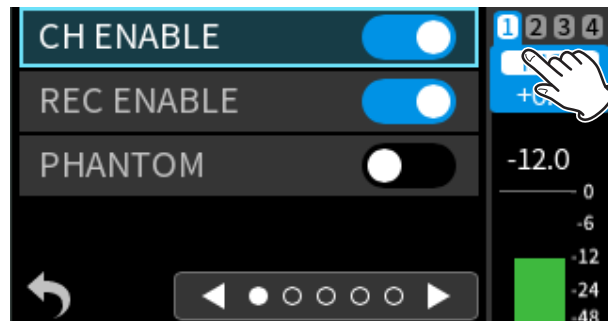

2. Tap the channel to set.

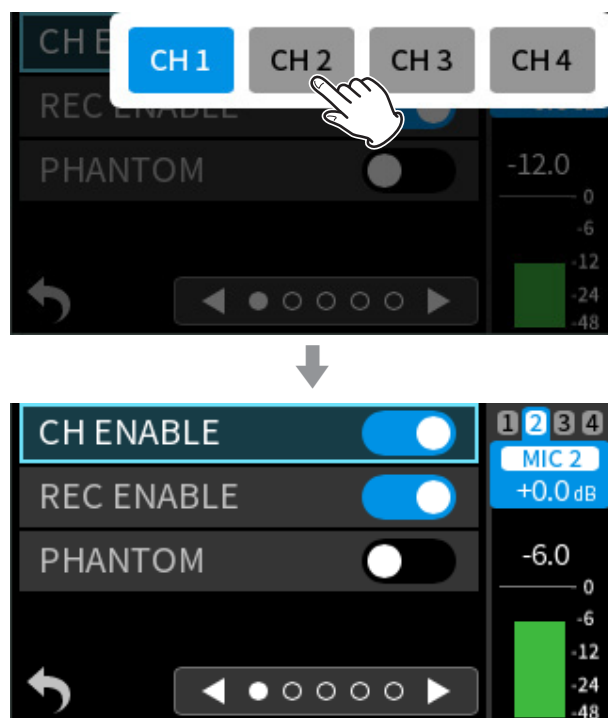

5-2. Saving and recalling input settings

The following input settings can be saved and recalled.

- DELAY
- LOW CUT
- LIMITER
- EQ
- NOISE GATE


A maximum of 5 presets can be saved.

NOTE


Before saving and when the FACTORY PRESET is loaded, they will be set to their default values.

Saving input settings


1. When the Home Screen is open, press the button for the desired channel (1–4) for saving.

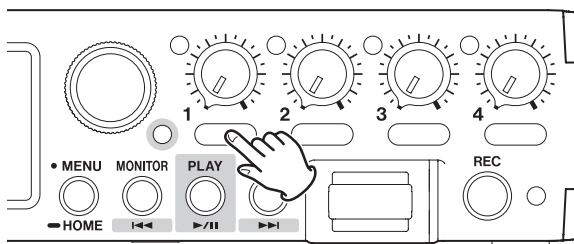

2. Tap "SAVE".

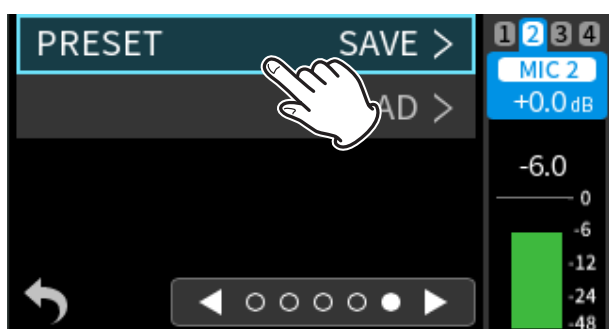


3. Tap the preset to save.

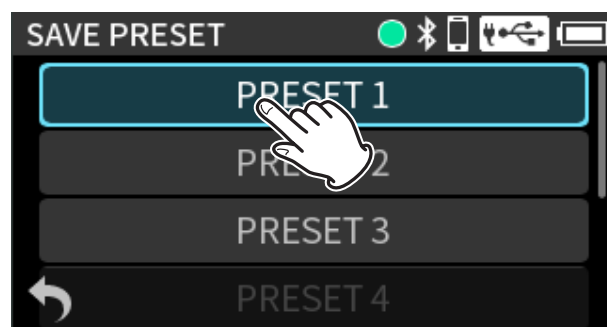

4. When a confirmation pop-up opens, tap "YES".




5. Tap  at the bottom left of the screen to return to the Home Screen.


5. I/O SETTINGS

Recalling input settings


1. When the Home Screen is open, press the button for the desired channel (1–4) for recalling.

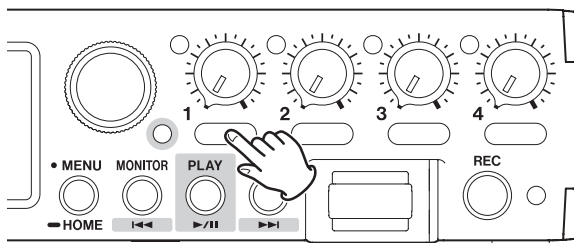


2. Tap “PRESET LOAD”.

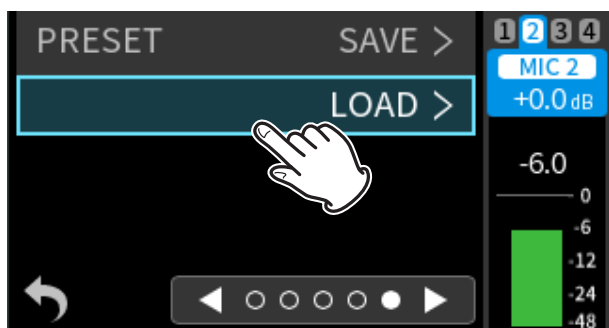

3. Tap the desired preset to recall.

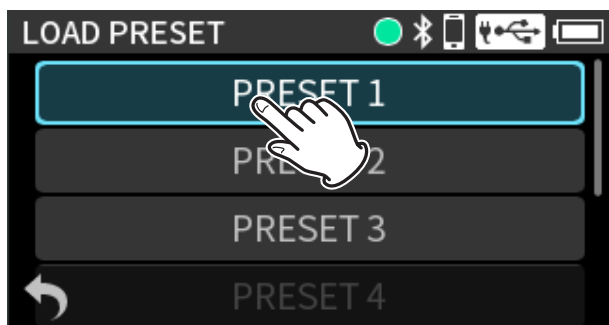


This will load the preset.

4. Tap  at the bottom left of the screen to return to the Home Screen.

5-3. Adjusting input levels


Turn the input level adjustment knobs to adjust the audio signal levels recorded in recording files.

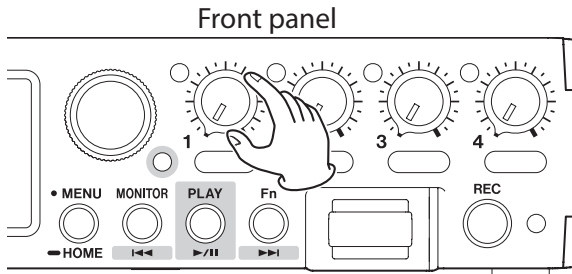


While watching the level meters, adjust the input level adjustment knobs so that levels average around -12 dB and the peak indicators do not light. Recording sounds might distort when peak indicators light.

NOTE

- If a knob's position is different from its level setting value, the knob will function after it is moved to the position of the set value.
- If a input level exceeds -2 dB, that peak indicator on the unit will light.

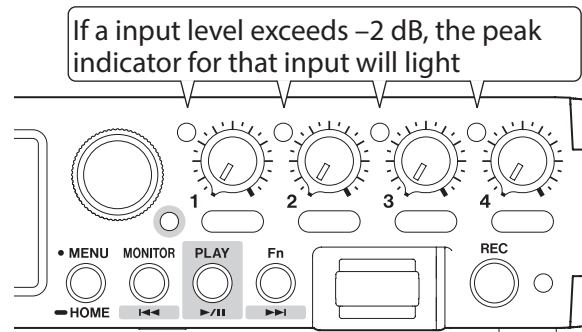

- If an overload occurs with an analog circuit, the entire level meter will become red.

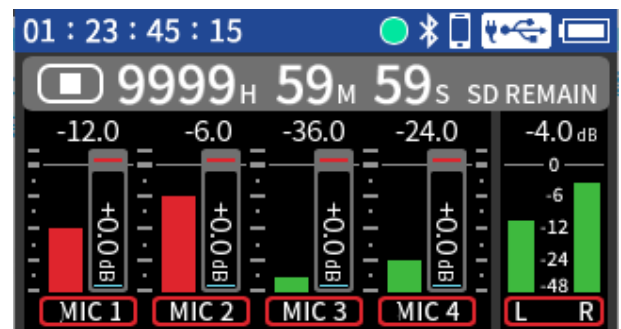

Since this could cause the recorded audio to become distorted, make the following adjustments.


- Distance the mic from the sound source.
- Lower the volume of the sound source.

5. I/O SETTINGS

5-4. Output settings

Selecting the headphone volume knob function

Press the MENU button and open PHONES VOLUME.

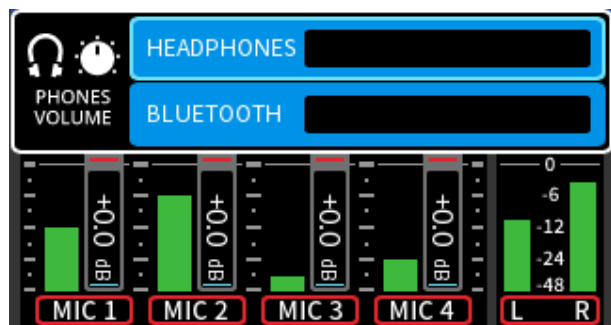

HEADPHONES: On

HEADPHONES: Off

HEADPHONES

When this is on, the headphone volume knob can adjust the headphone output volume.

BLUETOOTH

When this is on, the headphone volume knob can adjust the Bluetooth audio monitoring output volume.

NOTE

When both HEADPHONES and BLUETOOTH are turned on, both of their volumes can be changed while maintaining two volume balances.


OUTPUT

Set this by pressing the MENU button and using OUTPUT > OUTPUT.

Set this to adjust the volume output from the /TC/LINE OUT jack. (See “11-1. Setting output for camera use” on page 106.)

Adjusting the output volume

Set this by pressing the MENU button and using OUTPUT > OUTPUT LEVEL.

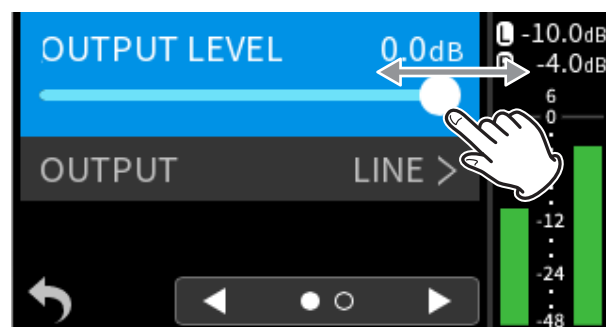

Range: -60 – 0 dB (default)

LIMITER

Set this by pressing the MENU button and using OUTPUT > LIMITER.

This function prevents distortion when signals that are too loud are output suddenly.

Options: Off (default), On

CAUTION

Distortion could occur if the output sound is excessively loud even when the limiter function is on. In such a case, lower the output level manually.

NOTE

This cannot be used when the sampling frequency is set to 192 kHz.

DELAY

Set this by pressing the MENU button and using OUTPUT > DELAY.

The amount of delay time to the output device can be adjusted.

This function is convenient for adjusting video and audio on a connected camera.


Options: Off (default) – 300 ms

NOTE

This cannot be used when the sampling frequency is set to 192 kHz.

5-5. OTHER SETTINGS

To change other settings, press the MENU button and open INPUT KNOB SETTINGS.

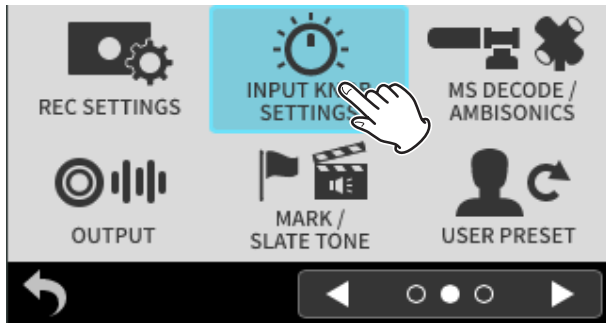


Setting the GANG operation mode


Set this by pressing the MENU button and using INPUT KNOB SETTINGS > GANG.

Setting the GANG operation mode links the input levels of channels 1–4 so they can be operated simultaneously. Knobs can be ganged in 2 groups.

1. Select “GANG”.

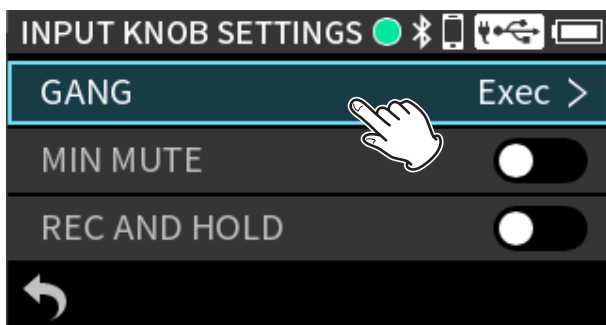

2. Tap channels to assign them to a gang group.

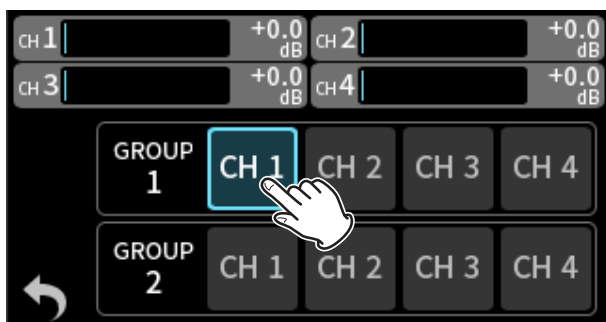


The same channel cannot be assigned to both group 1 and group 2.

NOTE

Even if a ganged channel reaches its upper or lower limit first, operation of the current channel can continue. In this case, differences in levels are remembered by the unit. When operation of a channel is reversed, level differences will be retained when operated.

GANG functions

When gang settings are enabled, gang states can also be checked on the Home Screen.

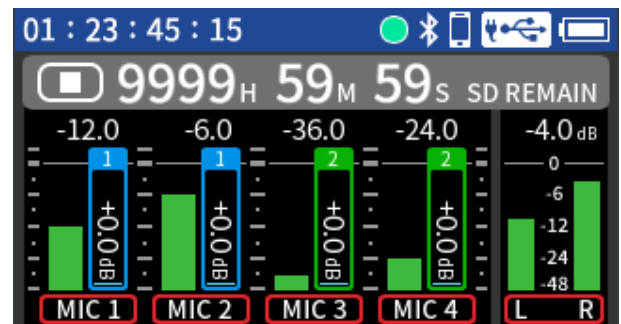


5. I/O SETTINGS

Setting input level operation mute

Set this by pressing the MENU button and using INPUT KNOB SETTINGS > MIN MUTE.

Whether or not minimizing the 1–4 knobs mutes their inputs can be set.

Set this using the “MIN MUTE” item.

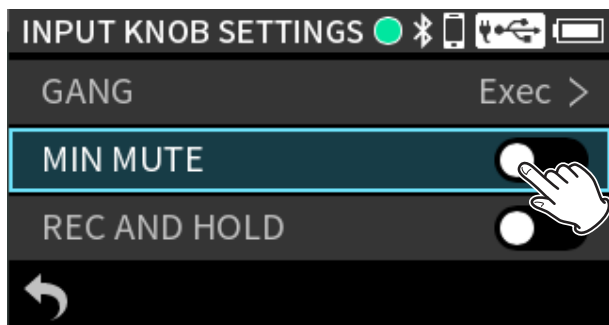

Off (default)

Minimizing the 1–4 knobs does not mute their inputs.


On

Minimizing the 1–4 knobs mutes their inputs.

Fixing input levels while recording

Set this by pressing the MENU button and using INPUT KNOB SETTINGS > REC AND HOLD.

Operation of the 1–4 knobs can be disabled in coordination with recording.

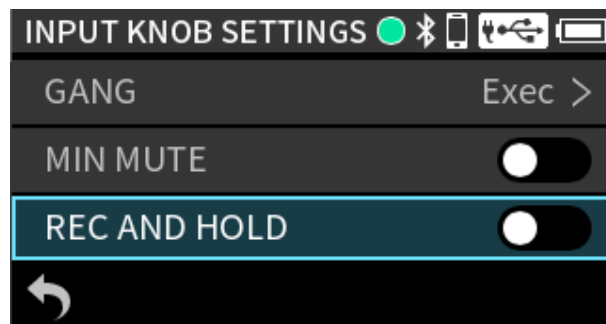

Off (default)

1–4 knobs are enabled

On

Starting recording will disable operation of the 1–4 knobs.

NOTE

Use the KNOB HOLD function to fix input levels for individual channels. (See “Locking input levels” on page 73.)

5-6. Using the mid-side decoding function


Mid-side mics can be used for recording, and their recordings played back.

See “Connecting mid-side mics” on page 62 for details about connecting mid-side mics.


Connection settings

Set the jacks connected to the mid-side mics by pressing the MENU button and using MS DECODE/AMBISONICS.

1. Tap the channel to set.

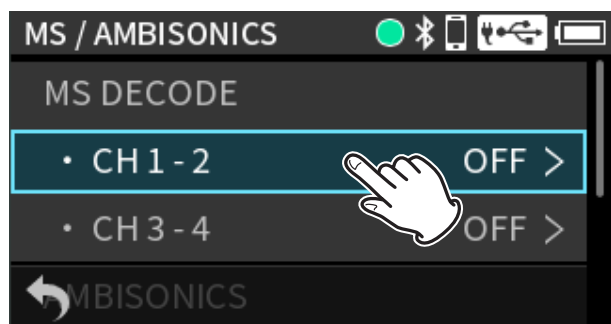

2. Tap the mode to set.

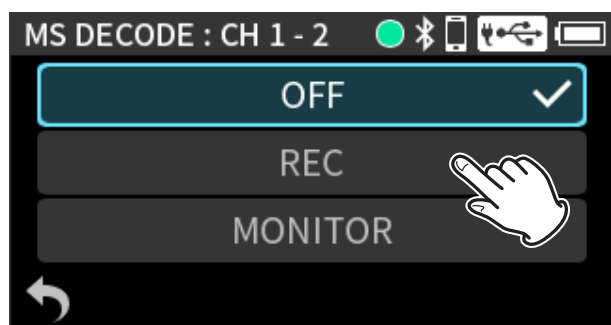

OFF (default)

Recording will occur in ordinary mode without using mid-side decoding.

REC

This mode decodes while recording. Playback is conducted without decoding.

MONITOR

Record mid-side mic output without decoding for decoding later. Use this mode to monitor when recording with mid-side mics.

Use this also when playing back mid-side files that were recorded without decoding.


NOTE

- The mid-side decoding function can be used when inputting mid-side mics through the 1/2 or 3/4 input jacks and when using this unit to play imported files recorded using mid-side mics. Turn off the mid-side decoding function to not use it.
- While MS DECODE is on, stereo-linking for those channels will be turned on and their input sources set to MIC. These settings cannot be changed while it is on.


Adjusting mid and side levels

Use the Mixer Screen to adjust the mid and side levels.

1. Tap the MS balance area.

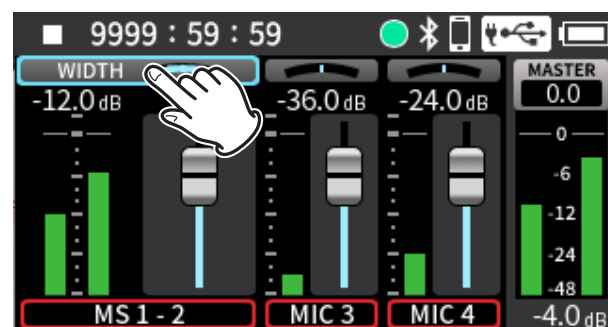

2. Slide the slider to adjust the width of the sound.

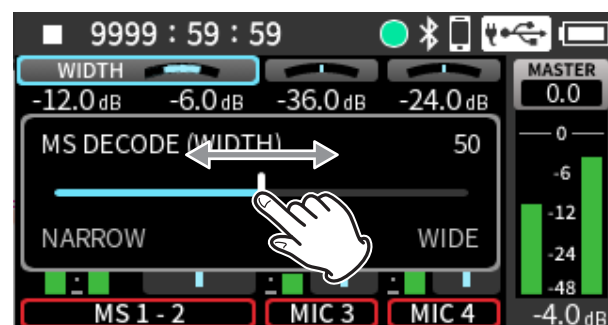


5-7. Outputting audio from this unit using HDMI®

Audio from this unit can replace the HDMI® output audio. HDMI® audio has 8 channels. 2 channels at a time can be replaced with audio from this unit.

Press the MENU button and use

HDMI AUDIO ASSIGN to set this.

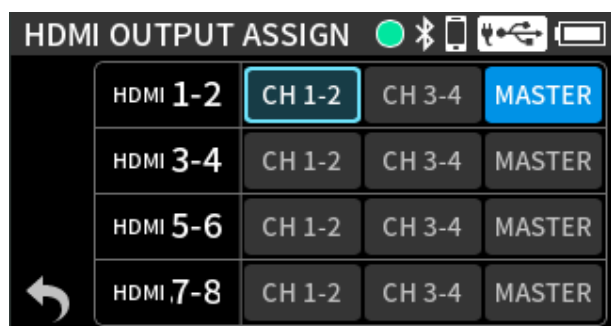

HDMI1-2

Select the audio from this unit to replace HDMI® audio channels 1–2.

Options: OFF, CH 1–2, CH 3–4, MASTER (default)

HDMI3-4

Select the audio from this unit to replace HDMI® audio channels 3–4.

Options: OFF (default), CH 1–2, CH 3–4, MASTER

HDMI5-6

Select the audio from this unit to replace HDMI® audio channels 5–6.

Options: OFF (default), CH 1–2, CH 3–4, MASTER

HDMI7-8


Select the audio from this unit to replace HDMI® audio channels 7–8.

Options: OFF (default), CH 1–2, CH 3–4, MASTER


NOTE

- If nothing is selected for channels, the HDMI® input audio for those channels will be output as is.
- Settings cannot overlap.

6-1. Starting recording

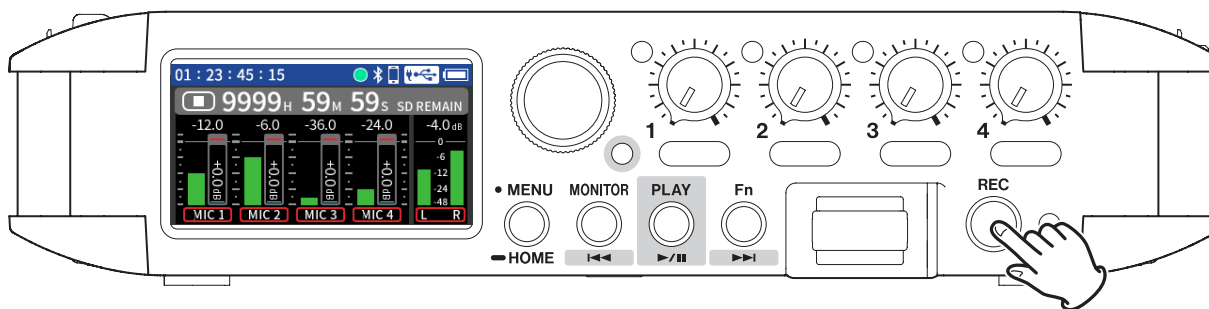


Press the REC button.

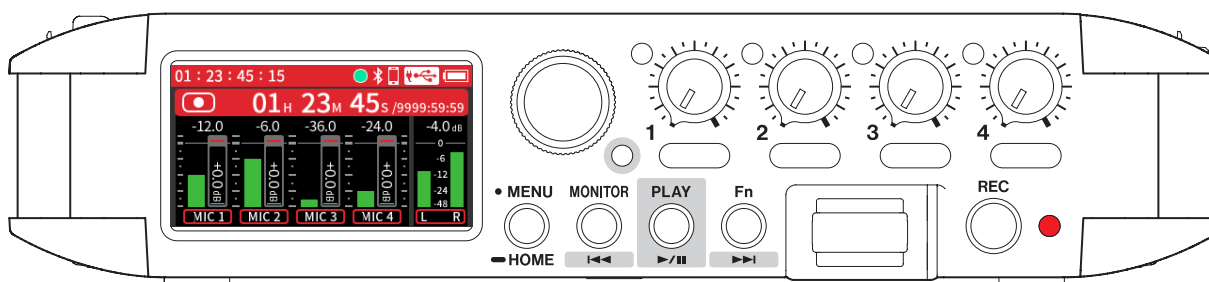


Recording

6-2. Stopping recording

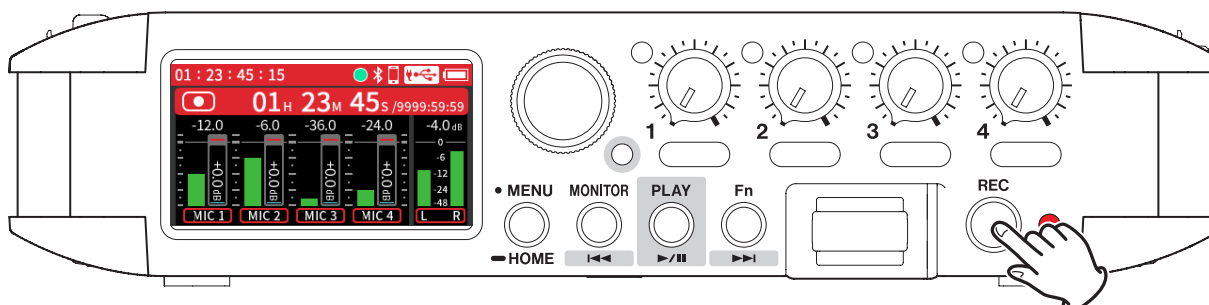

Press and hold the REC button until recording stops.

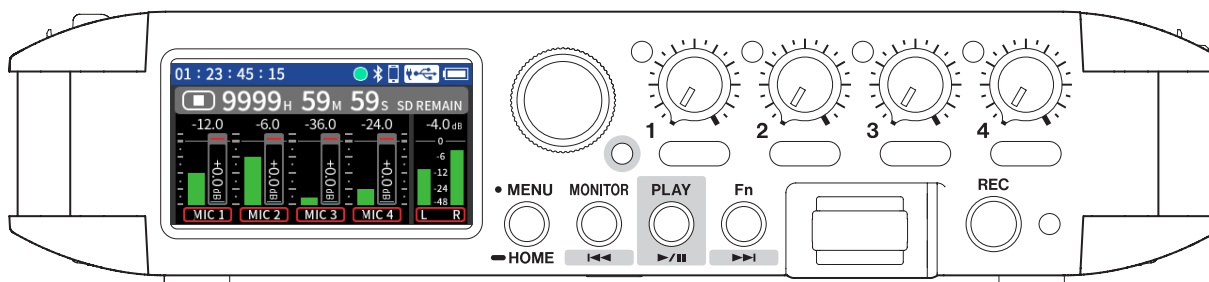


Stopped

7. Recording settings


7-1. Monitoring each input

Every input sound can be monitored using headphones, for example.

1. Press the MONITOR button to open the MONITOR SELECT Screen.

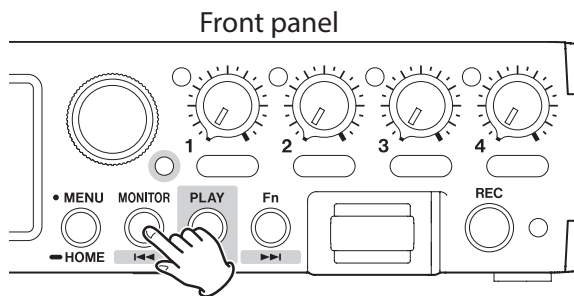

2. Tap channels to enable them for monitoring.
Select the desired monitoring sources for the L and R channels.
A mix of the sounds will be monitored if multiple sources are selected.

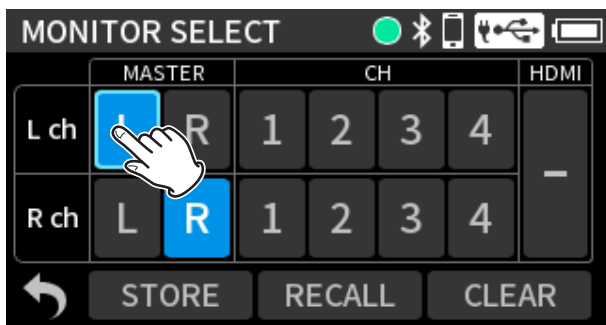

L: Monitoring off

L: Monitoring on

Off (nothing selected)

The monitoring sound will be muted.

MASTER L

The sound of the mixer L channel will be monitored.

MASTER R

The sound of the mixer R channel will be monitored.


CH 1-4

The input sounds of the tracks will be monitored.

3. To monitor HDMI® input, tap the HDMI area at the right of the screen.



4. Tap the channels to monitor.

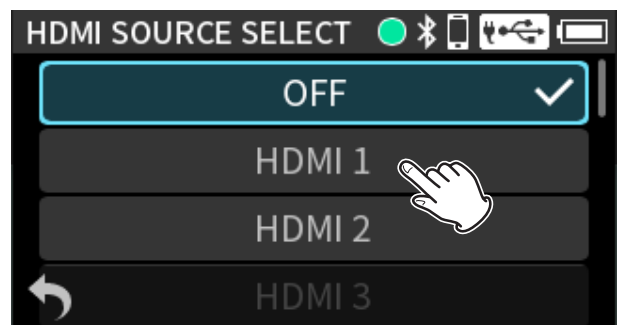

HDMI 1-8


Monitor the sounds of HDMI® input channels.

HDMI 1-2, HDMI 3-4, HDMI 5-6, HDMI 7-8

Monitor the sounds of HDMI® input channels as stereo pairs.

NOTE


If the sampling frequencies of this unit and the other HDMI® device are different, the monitoring sound will be silent.

5. Tap  at the bottom left of the screen to return to the Home Screen.


Saving monitoring settings

A maximum of 3 snapshots can be saved.

1. Tap "STORE".

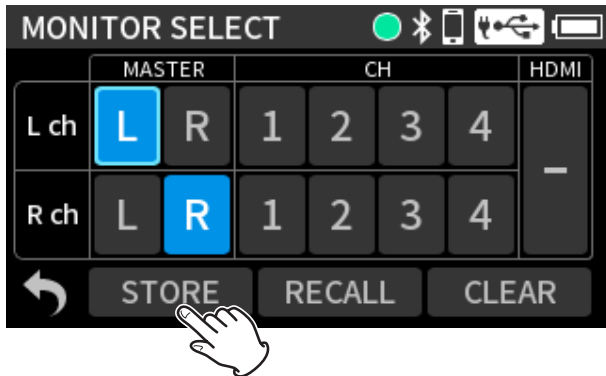


2. Tap the snapshot to save.

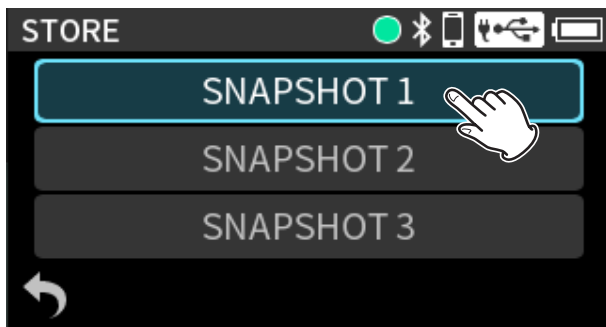


Recalling monitoring settings

1. Tap "RECALL".

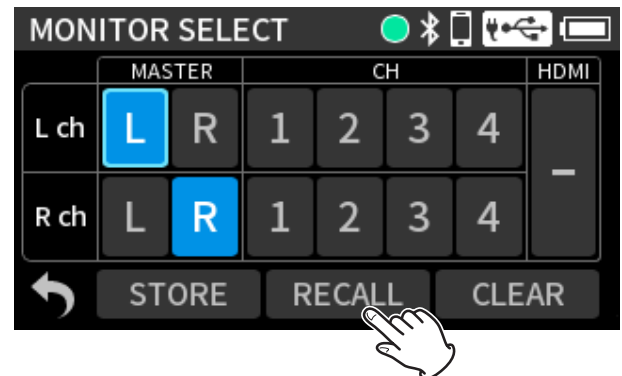


2. Tap the snapshot to recall.

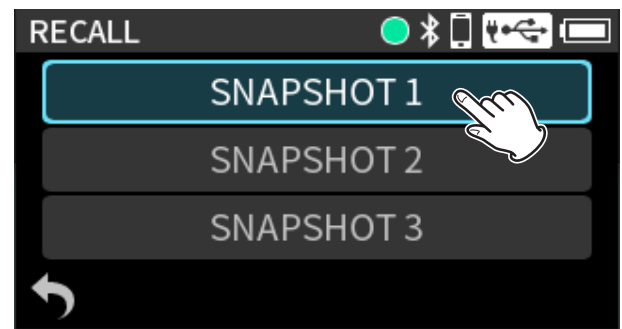

Initializing monitoring settings

Tap "CLEAR".

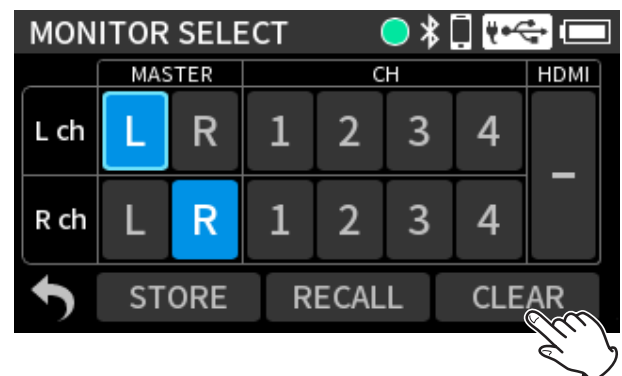

This will restore the monitoring settings to their default values.


L channel: MASTER L

R channel: MASTER R

7. Recording settings

7-2. Changing the recording file format

Set this by pressing the MENU button and using REC SETTINGS.

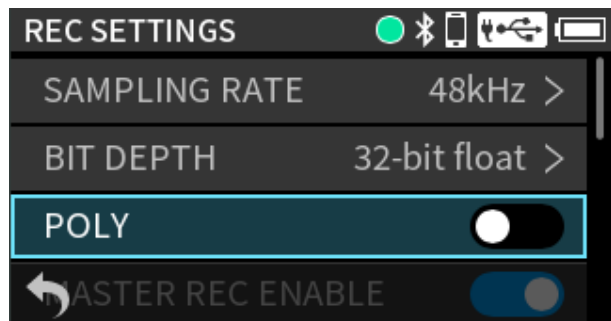

SAMPLING RATE

Select the sampling frequency.

Options: 48kHz(default), 96kHz, 192kHz

BIT DEPTH

Select the quantization bit depth.

Options: 24-bit, 32-bit float (default)

32-bit float

This unit supports 32-bit float recording. Files recorded using 32-bit float have the following advantages when being edited afterward.

- The levels of quiet sounds can be raised without changing their original audio quality.
- Sounds that seem clipped can be restored to unclipped sounds by lowering their volumes.

CAUTION

Analog clipping will not be changed when volume is lowered.

POLY

Off (default)

Mono or stereo files will be recorded for each channel according to their stereo link settings.

On

Channels 1–4 and a MIX will all be recorded as a single file.

REC ENABLE cannot be turned off for any channel.

MASTER REC ENABLE

Off

MIX files will not be recorded.

On (default)

MIX files will be recorded.

Simultaneous recording of mix files in WAV and MP3 formats (dual format function)

Set this by pressing the MENU button and using REC SETTINGS > DUAL FORMAT.

Off (default)

MP3 format mix files will not be created.

On

In addition to WAV files, MP3 format mix files will be created.

NOTE

If MASTER REC ENABLE is off so MIX files are not recorded, DUAL FORMAT will be turned off.

7-3. Capturing sound before recording starts

Set this by pressing the MENU button and using REC SETTINGS > PRE REC.

When this is on, up to 7 seconds of signal input can be captured before the start of recording.

Options: Off (default), On

NOTE

- When REC FORMAT is set to 96kHz, signals can be captured for a maximum of 5 seconds before recording starts. When set to 192kHz, signals can be captured for a maximum of 2 seconds.
- If a menu is used or playback operations are conducted, capturing pre-recorded audio will restart from that moment.

7-4. Recording file naming


See “9-1. File name overview” on page 96 for details.

7-5. Designating the folder used for recordings


See “9. File operations” on page 96 for details.

8. Playback

8-1. Playing files

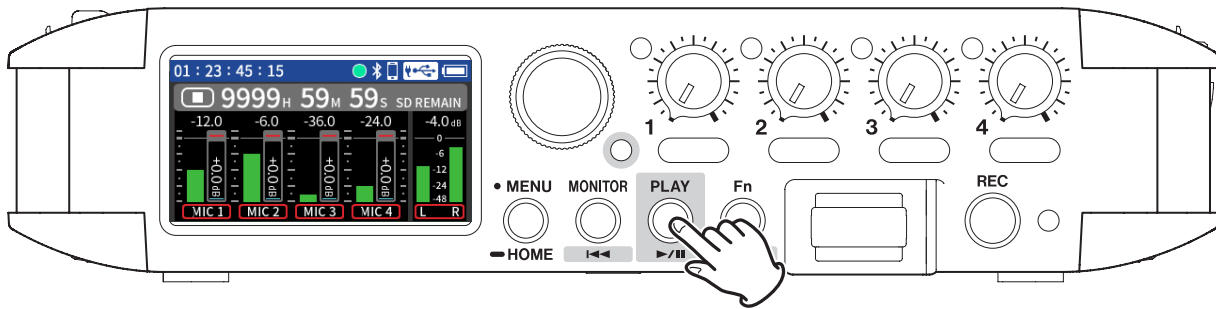

Press the ►/|| button.

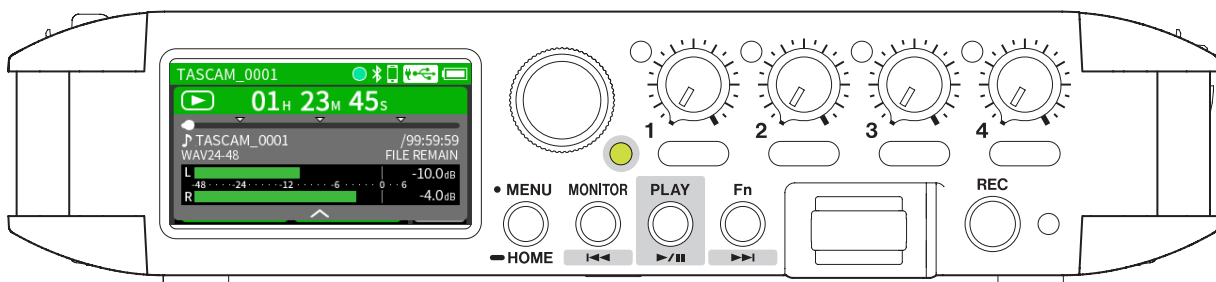


Current project during playback


The transport indicator will light,

and the MONITOR button will function as I◀◀ and the Fn button as ▶▶I.

8-2. Stopping playback

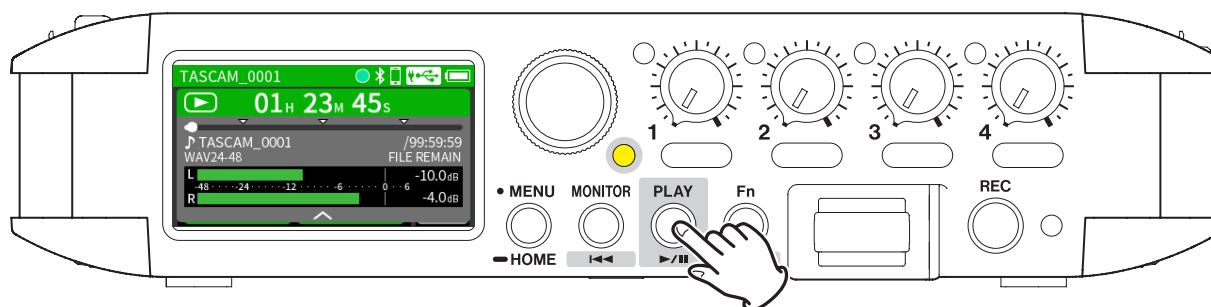


Press the ►/|| button.

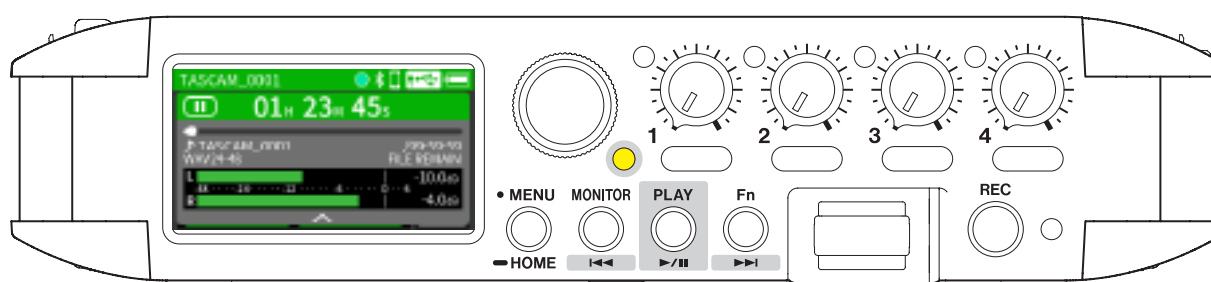


Stopped

Returning to the Home Screen

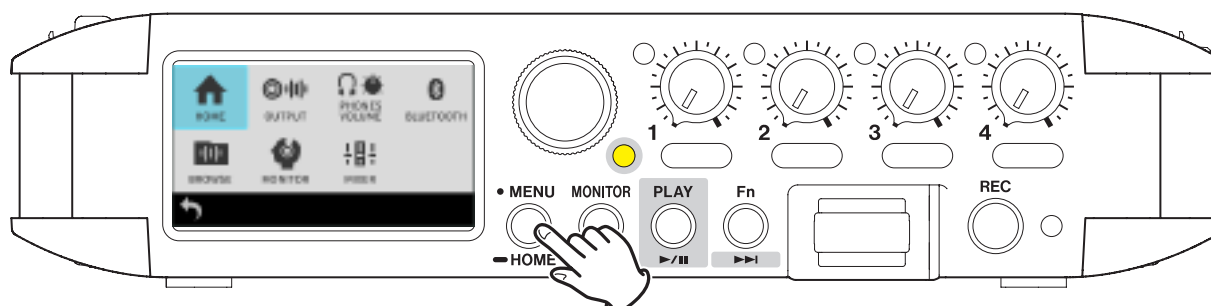

Press the MENU button and select HOME.

Or, press and hold the MENU button.

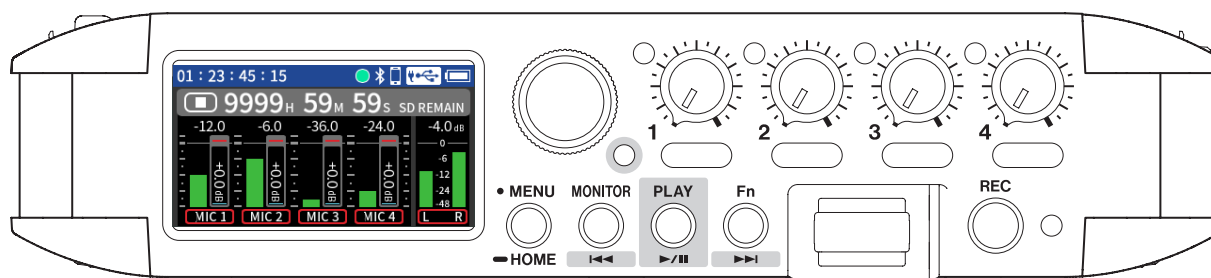

The transport indicator will become unlit, and the Home Screen will reopen.

TIP

The Home Screen can also be reopened by pressing and holding the PLAY button.


8. Playback

8-3. Screen overview

See “When stopped, playing, paused or searching forward/backward (using the transport)” on page 58.


8-4. Starting and pausing playback

When stopped or paused, press the ► / || button to start playback.

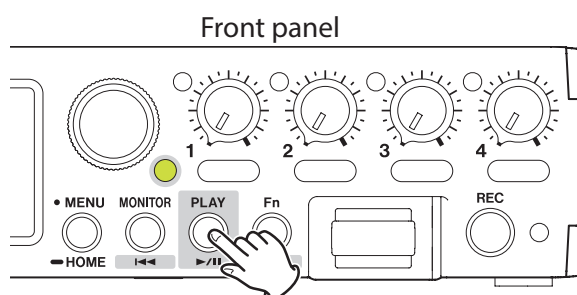

8-5. Changing the playback position


Slide the seek bar when playing or paused or stopped.

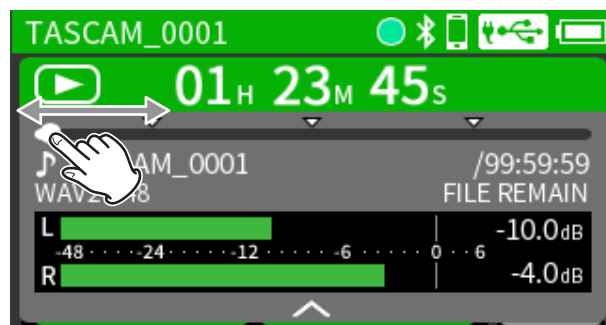

The playback position can also be changed by turning the data dial.

8-6. Selecting files for playback

Use the **I◀◀** and **▶▶I** buttons to select the desired file for playback.

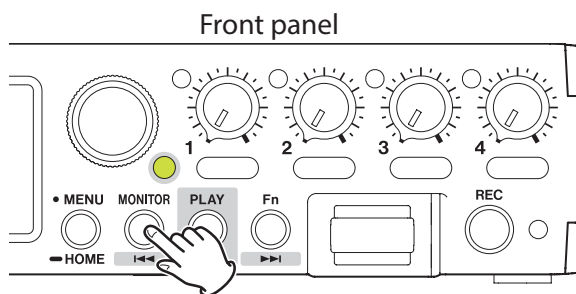

- Pressing the **I◀◀** button during playback will return to the beginning of the file. Pressing the **I◀◀** button at the beginning of a file will skip to the beginning of the previous file.
- Pressing the **▶▶I** button when located at the beginning or middle of a file will skip to the beginning of the next file.
- By pressing the MENU button and setting the MARK/SLATE TONE > MARK > SKIP MODE item, the **I◀◀** button can be used to move to the previous mark and the **▶▶I** button can be used to move to the next mark.

8-7. Searching backward and forward

Press the **I◀◀** or **▶▶I** button on the unit to search backward or forward while pressing.

9. File operations

This unit can record and play wav (including BWF) files.

9-1. File name overview

Files recorded by this unit are named as described below.

Project name	Channel
TASCAM_0001-1.wav	
Characters set by user	File number

Characters set by user

When the type is set to DATE

YYMMDD (YY: year, MM: month, DD: date)

The last two digits of the year are used, and two digits each are used for the month and day.

When the type is set to TEXT

A string of 6–9 characters can be specified as desired.

The default value is "AV4-00000".

The usable characters are as follows.

Uppercase and lowercase alphabet letters
numerals 0–9,

and the following symbols:

! # \$ % & ' () + , - . ; = @ [] ^ _ ` { } ~ (space)

File numbers

This shows the order recorded.

The default value is "0001".

MP3 files recorded using dual format

File number+M

Channel number

This shows which channel was recorded.

When stereo-linking off

Channel number 1, 2, 3 or 4

When stereo-linking on

Linked channel number 1_2 or 3_4

Master files

MIX

When 6CH POLY setting is on

1_6

Project name

This is the characters set by the user and the file number connected by an underscore (_).

Since the file number is increased each time a file is recorded, the project also changes with each recording. See "9-3. Project overview" on page 98 for details about projects.

NOTE

- If a file with the same user-set characters and file number already exists at the time of recording, "[---]" will be added after the file number. (--- is a three-digit number, starting with "001")
Example: YYMMDD_0001[001]-1.wav
- Files recorded in ambisonic mode will be named as follows.

When recorded with A format

TASCAM_AmbiA_0001-1.wav

When recorded with B Format FuMa


TASCAM_FuMaB_0001-1.wav

When recorded with B Format AmbiX

TASCAM_ambiXB_0001-1.wav

Changing how files are named

Set this by pressing the MENU button and using REC SETTINGS.

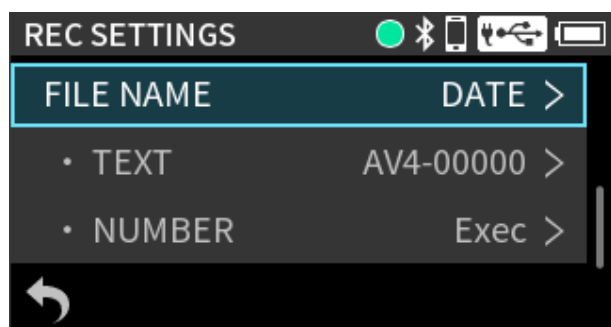

FILE NAME

Set the characters used at the beginning of the file name.

DATE (default)

The DATE is added to the file name.
YYMMDD (YY: year, MM: month, DD: date)
The last two digits of the year are used, and two digits each are used for the month and day.

TEXT

The 6–9 characters set freely using TEXT are added to the file name.
The default value is "AV4-00000".

UNIT NAME

The name of the individual device is used for the file name.

NOTE

- If DATE is selected, the file name will be created using the date and time of the unit's internal clock. Set the clock in advance to enable recording with the correct date.
- The dedicated control app can be set to automatically set the clock of the unit when it is connected to the app.
- The UNIT NAME must be set in advance using the dedicated control app. See the manual for the dedicated control app for setting procedures. If the UNIT NAME has not been set, "FR-AV4" will be used for file names.

Setting characters to use for file names

Set this using "TEXT".

See "Character input" on page 43 for details about character input.

Setting the file number

Set this using the "NUMBER" item.

Tap the numbers on the screen to change them.

When done setting, tap "SET" to confirm.

See "Inputting numbers" on page 44 for details about number input.

NOTE

- If a file with the same name and number already exists at the time of recording, "[---]" will be added after the file number. (--- is a three-digit number from 001 to 999.)
- This will be disabled if the METADATA function has been turned on using the dedicated control app.

9-2. File and project structure overview

Folders

Formatting SD cards with this unit will create SOUND and UTILITY folders.

Folders can be created inside the SOUND folder. Create them as necessary. (See “Creating folders” on page 101.)

Recording data

After the SD card is formatted, recording data is saved in the SOUND folder.

To change the folder where data is saved, select the folder on the BROWSE Screen, and select OPEN. (See “9-8. Setting where recording projects are saved” on page 103.)

9-3. Project overview

Files created during a single recording are referred to as a project.

Files belong to the same project if their names are the same from the characters set by the user through the file numbers. See “9-1. File name overview” on page 96 for details about project names. The way project names are given can be changed in the same manner as for file names. (See “Changing how files are named” on page 97.)


Example

Project name	Files in the same project
TASCAM_0001	TASCAM_0001-1.WAV
	TASCAM_0001-2.WAV
TASCAM_0002	TASCAM_0002-1_2.WAV

Individual files not created by this unit and loaded from a computer or other source are each treated as a single project.

9-4. Folder hierarchy example


This illustration is an example of the folder hierarchy on an SD card used with this unit.

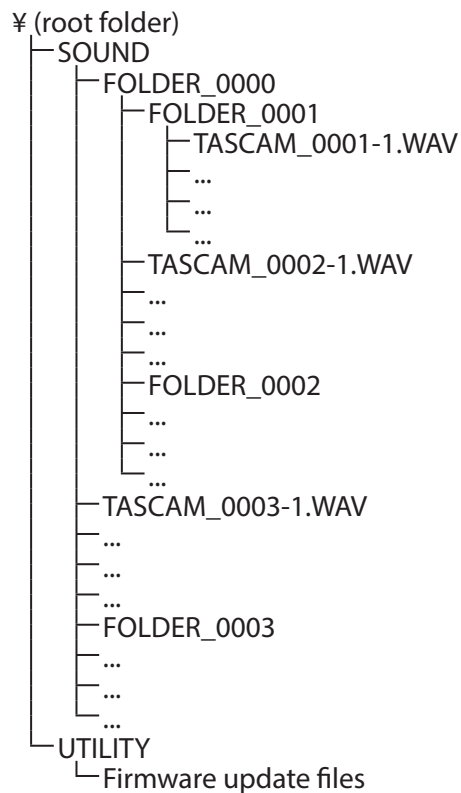

- SOUND and UTILITY folders will be created automatically during formatting.
- Only two levels of subfolders can be created.
- This unit cannot recognize subfolders and files beyond three levels.
- The maximum total number of files and folders is 1000.
- Everything in the SOUND folder and its subfolders is shown on the BROWSE Screen.


9-5. Using the BROWSE Screen


Files on the loaded SD card can be worked with and easily played back. Press the MENU button and show BROWSE.

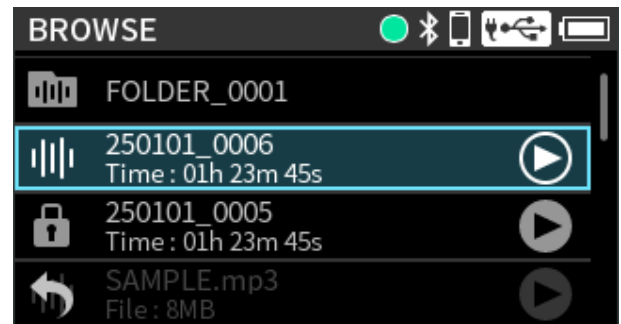

NOTE

If an SD card is not loaded, the following screen will appear.


Tap  at the bottom left of the screen to return to the Home Screen. Then, install an SD card.

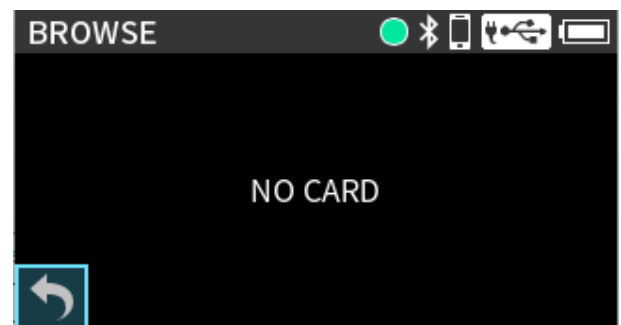


9. File operations

9-6. Folder operations

Screen overview

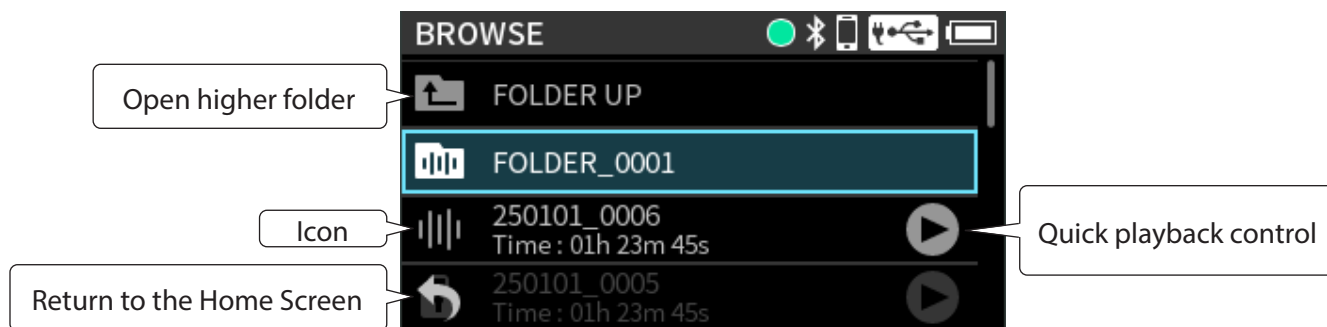

Icon

Files that can be played are shown with a waveform icon. Folders are shown with .

Folder/file name


Tap this to open the folder menu or file menu.

Quick playback control


Tap  to start playback, and tap  to stop playback.

Moving between folders

1. Tap the desired destination folder.

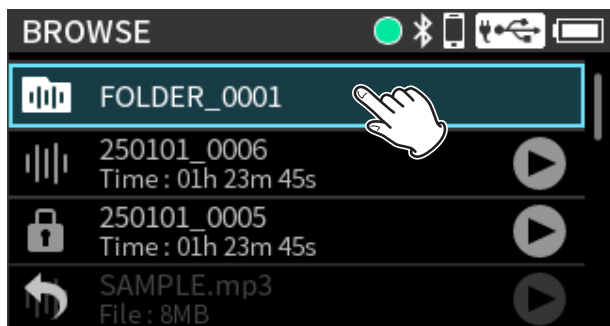



2. Tap "OPEN".

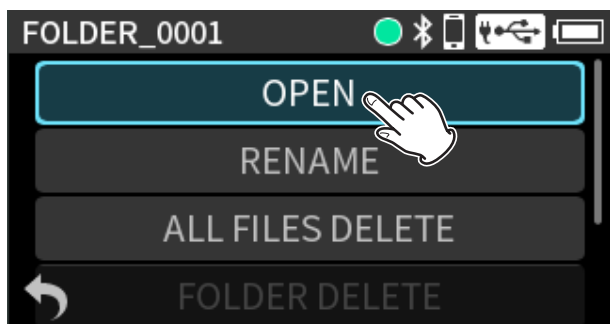

To move up a folder level, select "FOLDER UP".

Quick file playback



Tap the quick playback control  button for the file to be played.

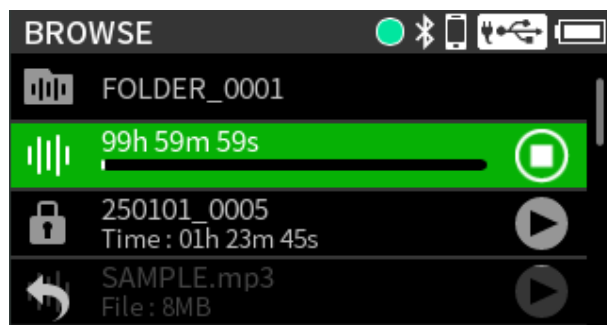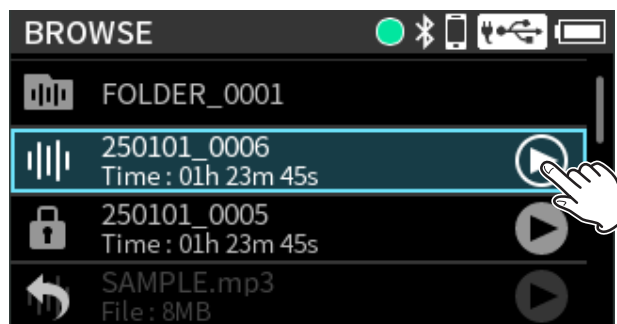

Tap  to stop playback.

Folder menu

Tap the desired folder.

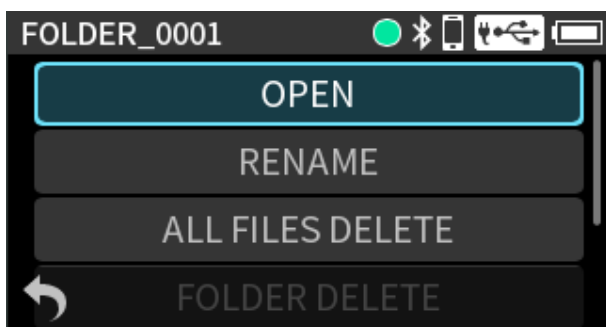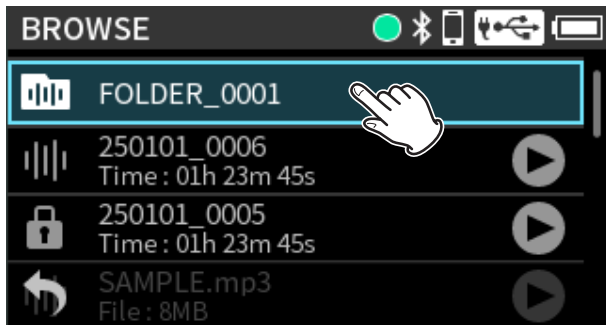

OPEN

This shows the contents of the folder.

RENAME

This opens a screen where the folder name can be edited.

Folder names that can be changed can have between 1 and 11 characters. See “Character input” on page 43 for how to input characters.

ALL FILES DELETE

This deletes all projects and files inside the folder. Folders, however, will not be deleted.


FOLDER DELETE

This deletes the folder.


Folders that have files remaining in them cannot be deleted. Delete all the files in the folder before deleting the folder.

Creating folders

1. Scroll to the very bottom of the screen.

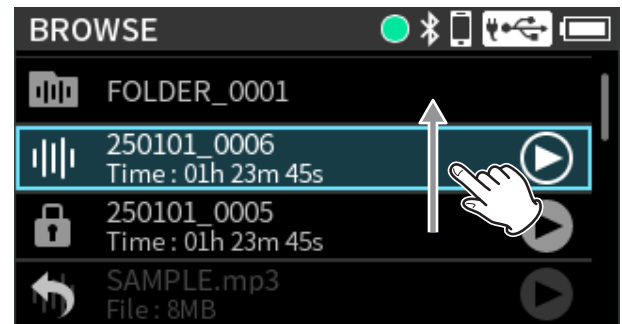

2. Tap “NEW FOLDER”.

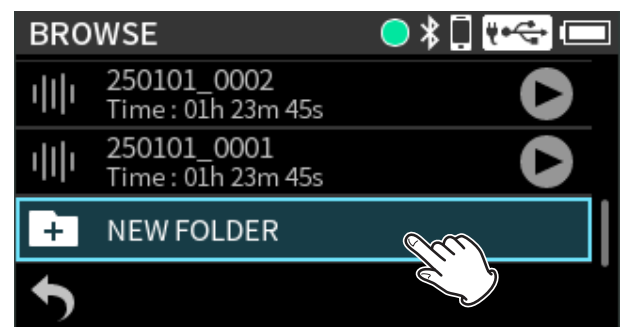

3. Input the folder name.





- See “Character input” on page 43 for how to input characters.
- If a folder named FOLDER+number already exists, selecting and tapping “NEW FOLDER” will show FOLDER+ (the number+1) as the default value. If you want to change this name, use the RENAME function.

9. File operations

9-7. File and project operations

File menu

Tap the desired file.

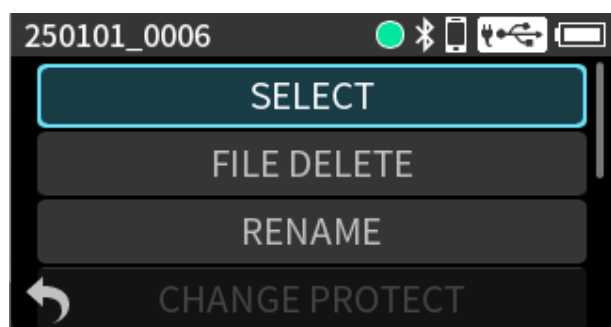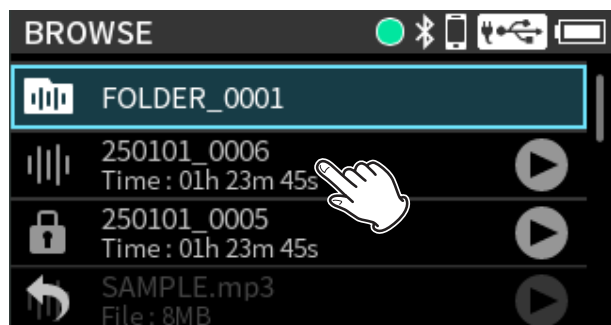

SELECT

Selecting a file makes it the current project and reopens the Home Screen.

Press the ► button on the unit to play the current project.

FILE DELETE

This deletes the file.

Protected (read only) files cannot be deleted.

RENAME

Use this to change the project name.

Only projects that have been recorded by this unit can be changed. The number of characters can be changed to between 6 and 9.

See “Character input” on page 43 for how to input characters.

CHANGE PROTECT

Use this to activate/deactivate the protection of files in the project.

Lock marks (🔒) are shown for icons of files that are protected.

FILE INFORMATION

This shows information about files in the project.

This shows the project name, recording format, recording date, playback time and file size.

This shows the PROJECT, SCENE and NOTE data recorded in iXML and the timecode setting.


MARK

This opens a list of the marks.

Current project


The name of the file shown in the project status bar is the current project. Conducting recording or playback will switch the current project.

Viewing mark lists

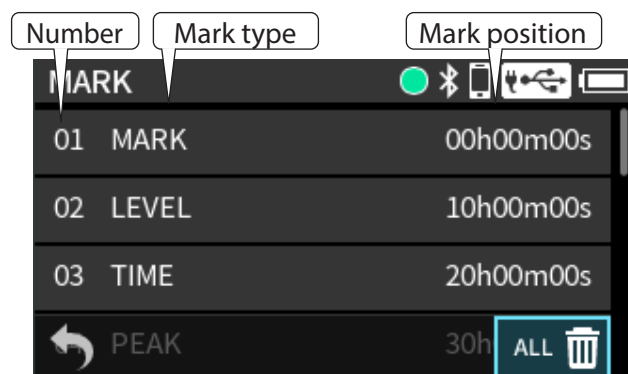

See “10. Mark functions” on page 104 for information about mark types.


Deleting marks

Tap  on the MARK list screen shown above to delete all marks.


9-8. Setting where recording projects are saved

Follow the procedures below to make the selected folder the save destination.

1. Tap the folder to be made the save destination.

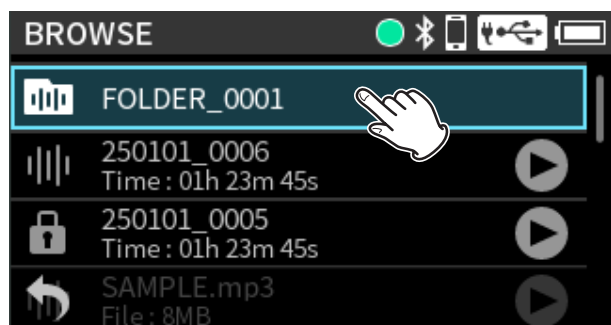

2. Tap "OPEN".

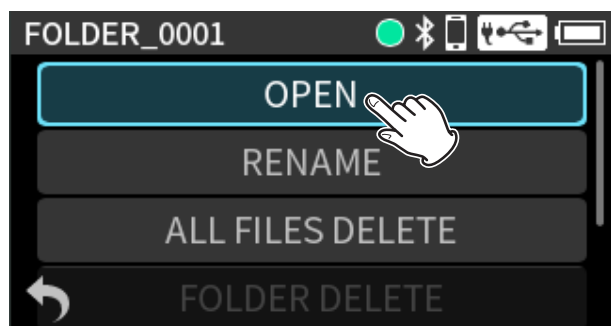

10. Mark functions

10-1. Mark types

The types of marks and conditions when they are added are as follows.

MANUAL

Marks added manually

TIME

Marks added when set time elapses

PEAK


Marks added when input signal exceeds peak level

BUFFER OVERFLOW (BOF)

Marks added when SD card write errors occur during recording

10-2. Adding marks

Press the MENU button and open MARK/SLATE TONE.

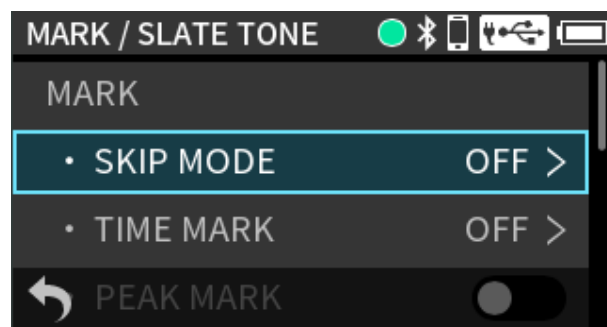

To manually add marks, set the Fn button function to MARK/SLATE. (See “Assigning the Fn button function” on page 46.)

Adding marks at regular intervals

Set this using TIME MARK.

Marks will be added automatically when the set time elapses during recording.

Options: OFF (default), 5 min, 10 min, 15 min, 30 min, 60 min

Adding marks when peak levels occur


Set this by pressing the MENU button and using MARK/SLATE TONE > PEAK MARK.

When this is on, marks will be added automatically when input signals exceed the peak level during recording. These marks can be used after recording to find parts where the peak level was exceeded.


Options: Off (default), On

Adding marks manually

When recording, press Fn (MARK/SLATE) button to add a mark at any point.

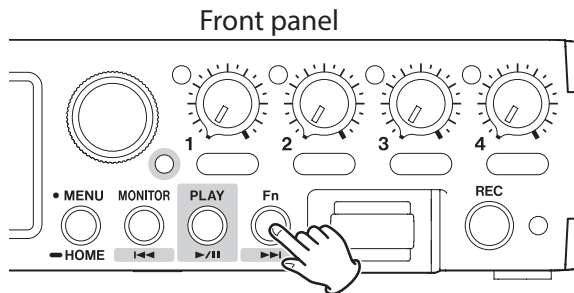

When a mark is added, a pop-up with mark information appears at the bottom of the display.

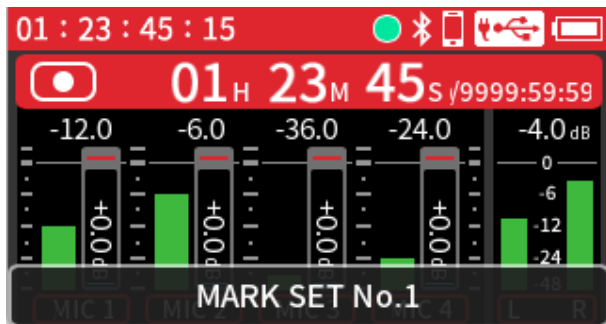

10-3. Jumping to set marks

Set this by pressing the MENU button and using MARK/SLATE TONE > MARK > SKIP MODE.

When the Home Screen is open and the transport indicator is lit, the ◀◀ and ▶▶ buttons can be pressed to move to earlier and later subject marks. When there are no subject marks, they will skip to the previous or next file.

Skipping is disabled when the mark skipping function is OFF.

Options: OFF (default), ALL, MANUAL, TIME, PEAK, BUFFER OVERFLOW

10-4. Deleting marks

Use the BROWSE Screen file menu to delete marks. (See "Deleting marks" on page 102.)


10-5. Opening the mark list

See "Viewing mark lists" on page 102 for details.

11. Camera functions

11-1. Setting output for camera use

Set this by pressing the MENU button and using OUTPUT > OUTPUT.

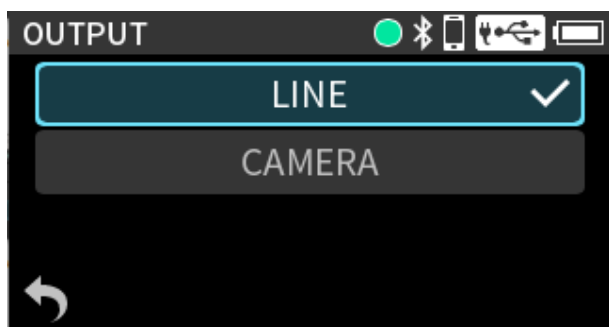

LINE (default)

Output from the /TC/LINE OUT jack will not be attenuated.

By adjusting the OUTPUT LEVEL, it can be attenuated 0 to -60 dB.

CAMERA

Output from the /TC/LINE OUT jack will be attenuated by -20 dB.


By adjusting the OUTPUT LEVEL, it can be attenuated by -20 – -80 dB. This enables inputting audio to the camera at a suitable level.

See “5-4. Output settings” on page 82 for details about adjusting the OUTPUT LEVEL.

11-2. Adding slate tones

Set the Fn button function to MARK/SLATE. Then, conduct the operations below. (See “Assigning the Fn button function” on page 46.)


When recording or monitoring, press and hold the Fn (MARK/SLATE) button to output a slate stone. When recording, slate tones will be added to files.

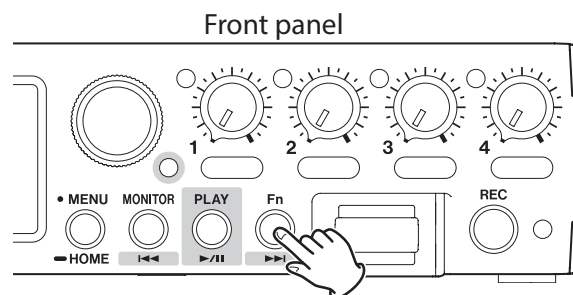


NOTE

- In order to prevent misoperation, the button must be held briefly to add a slate tone.
Slate tones are output from the /TC/LINE OUT jack.
- Marks are added at positions where slate tones are added manually.

11-3. Using the auto tone function

The auto tone function can be used to automatically insert a slate tone whenever recording starts and stops. By connecting the /TC/LINE OUT jack to the audio input jack of a camera, both units can record the same slate tones to their files. These tones can be used as guides to synchronize files in video editing software.

Press the MENU button and open MARK/SLATE TONE.

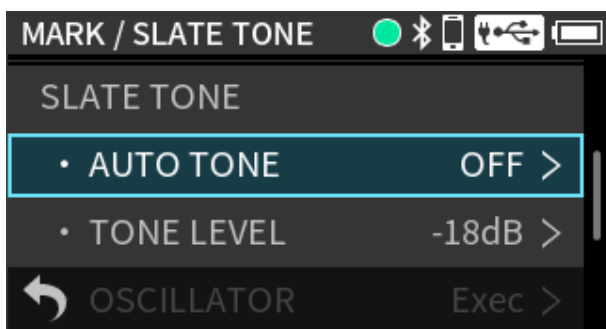

Auto tone function

Set this using AUTO TONE.

The location where slate tones are added can be set.

OFF (default)

Slate tones will not be added.

HEAD

Tone signals are only inserted at the start of recording.

HEAD+TAIL

Tone signals are inserted at both the start and end of recording.

Adjusting the tone level

Set this using TONE LEVEL.

This sets the tone volume.


Options: -12dB, -18dB (default), -24dB, -30dB, -36dB

Oscillator function

Set this using OSCILLATOR.

A tone will be output at the selected level.

Use this to check the level on a connected camera.

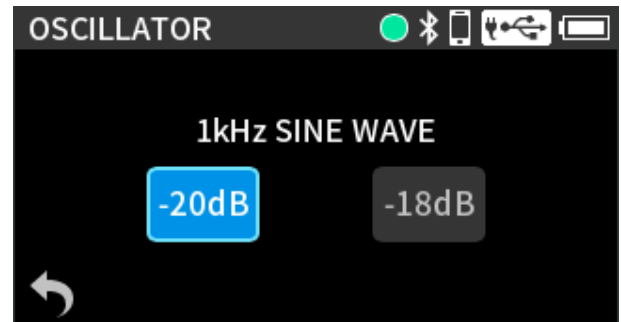



12. USB connection

12-1. Exchanging files with computers

Refer to “4-5. Computers and smartphones” on page 67 and connect with a computer beforehand.

Setting this unit for use as a card reader

Press the MENU button and open SD CARD > SD CARD READER.

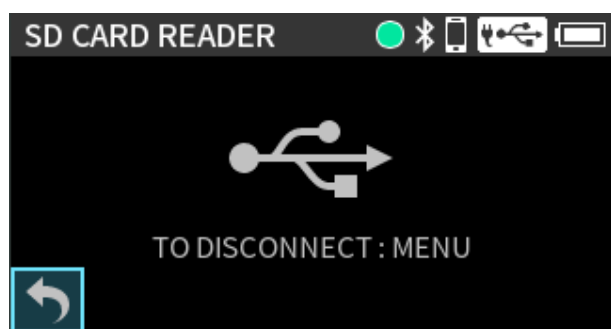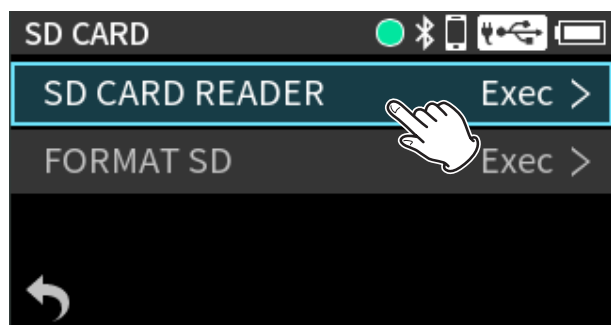

The unit display will change. The SD card in the unit can be accessed when it is recognized by the computer.

Transferring files


Open the “FR-AV4” drive on the computer to show the “SOUND” and “UTILITY” folders.


To transfer files from the computer, copy the desired audio files on the computer to the SOUND folder. To transfer files from the SD card to the computer, copy the desired audio files from the SOUND folder to any folder on the computer.

TIP

Subfolders can be created in the SOUND folder. This unit cannot recognize subfolders and files beyond three levels.

Disconnecting from a computer

Follow the specified procedures for the computer to remove the media. Then, tap the  icon at the bottom left of the screen.

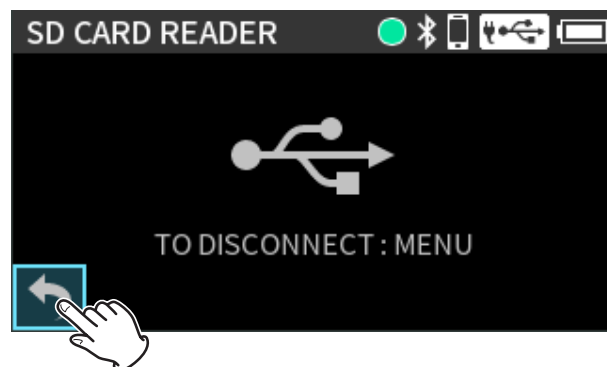

NOTE

Follow the procedures specified for the computer to disconnect the media from it before removing the SD card from the unit or ending SD CARD READER operation.

12-2. Connecting with iOS devices

To connect with an iOS device with a lightning connector, a Lightning to USB Camera Adapter and a USB cable (Type-A to Type-C) are necessary.

To connect with an iOS device with a Type-C connector, a USB cable (Type-C to Type-C) is necessary.

Install batteries and turn off the USB BUS POWER item.

NOTE

This unit will not provide power to an iOS device when they are connected.

12-3. Using the ASIO driver

With Windows, an ASIO driver for the FR-AV4 can be used. Check the page for this product on the TASCAM website for details.

<https://tascam.jp/int/product/fr-av4/support>

NOTE

With a Mac, the standard OS driver will be used, so there is no need to install any software.

12-4. Using as an audio interface

This unit can be used as a USB audio interface by connecting it with a computer using a USB cable.

NOTE

- This unit cannot be used as a USB audio interface if its sampling frequency is 192 kHz.
- Sound played back on this unit can be output over USB.

When an SD card is loaded

Manually set this unit and the computer to use the same sampling frequencies.


See “7-2. Changing the recording file format” on page 90 for procedures to change the sampling frequency of this unit.

After changing the sampling frequency, starting recording will cause audio to be transmitted.

When an SD card is not loaded

This unit will operate using the sampling frequency of the computer.

FR-AV4 USB audio channel assignments

USB channels	Signals
USB IN 1-2	Stereo mix
USB IN 3-4	Inputs 1–2
USB IN 5-6	Inputs 3–4 or input signals from  /EXT IN (3/4)


Only the INPUT LEVEL and PHASE settings are enabled for the selected inputs and applied to the signals sent to the computer.

NOTE

The automatic power saving function is disabled when being used as a USB audio interface. (See “16-6. Using the automatic power saving function” on page 130.)

Inputting sound to the computer using the unit inputs

1. Use a USB cable to connect the computer and the unit.
2. Set the audio input device to "FR-AV4" on the computer.
Set this unit and the computer to use the same bit depths and sampling frequencies.
3. Turn on "CH ENABLE" for the channels to be used as inputs to the computer.

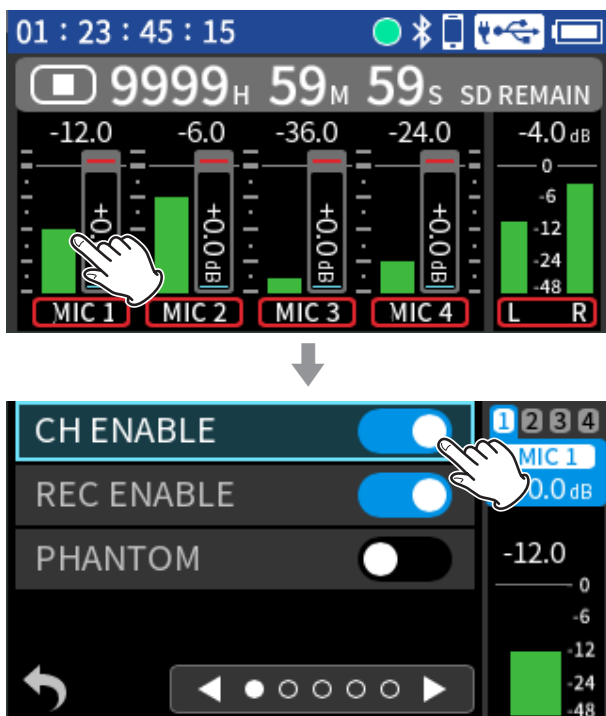

4. Turn off "CH ENABLE" for the channels not to be used as inputs to the computer.

Mixing the computer output into the unit master track

Press the MENU button and use PREFERENCES > USB RETURN to set this.

CH INPUT (default)

Use the computer output sound as channel input sound.

MASTER



Mix the computer output sound into the master track of the mixer.

12. USB connection


Using the computer output as sound input to this unit

Select CH INPUT for the USB RETURN item beforehand.

1. Use a USB cable to connect the computer and the unit.
2. Set the audio output device to "FR-AV4" on the computer.
Set this unit and the computer to use the same bit depths and sampling frequencies.
3. Select USB as the input source of channels to assign sound from the computer to them.

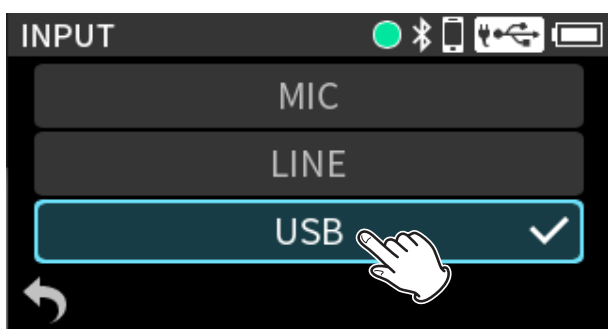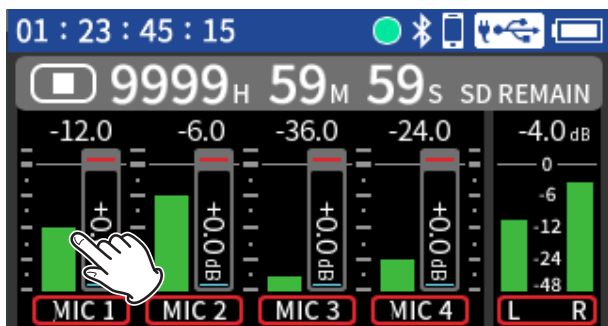

4. Turn on CH ENABLE for channels with USB assigned.

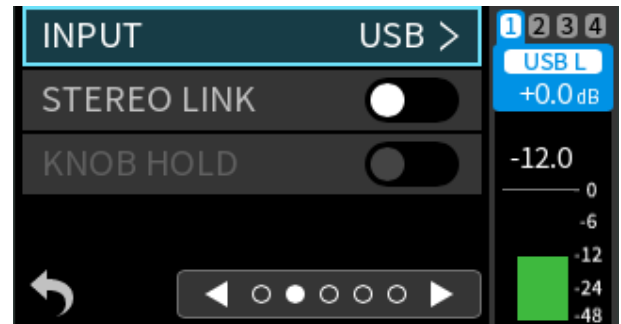

NOTE

Adjust the USB volume on the output device.

13. Remote control functions

This unit can be controlled from an iOS/Android device using the TASCAM RECORDER CONNECT controller app if an AK-BT2 Bluetooth adapter (sold separately) is connected to its Bluetooth adapter connector.

TASCAM RECORDER CONNECT can simultaneously control up to five supported devices (including FR-AV4, FR-AV2 and DR-10L Pro models).

Check the page for this product on the TASCAM website for details, including about how to use the app.

<https://tascam.jp/int/product/fr-av4/support>

CAUTION

- Connection operations are not guaranteed with all devices that support Bluetooth.
- TEAC CORPORATION will bear no responsibility should any data loss occur when using Bluetooth functions.

NOTE

The unobstructed transmission distance of the AK-BT2 Bluetooth adapter is about 10 m. (The transmission distance is only an estimate. The transmission distance may vary depending on the surrounding environment and radio wave conditions.)

13-1. Installing the dedicated controller app

1. Connect the device on which the app will be installed to the Internet.
2. Search for “TASCAM RECORDER CONNECT” on Google Play for an Android device or on the App Store for an iOS device. Then, download and install it.

Please be aware that you are responsible for any transmission costs related to Internet connection.

iOS



<https://apps.apple.com/us/app/tascam-recorder-connect/id1667424244>

Android




<https://play.google.com/store/apps/details?id=com.tascam.jp.android.DR10LProCONNECT&hl=en&gl=us>

13. Remote control functions

13-2. Installing a Bluetooth® adapter

1. Remove the cover from the Bluetooth connection device port on this unit, replace the dummy plug and insert an AK-BT2 (sold separately) in the port.

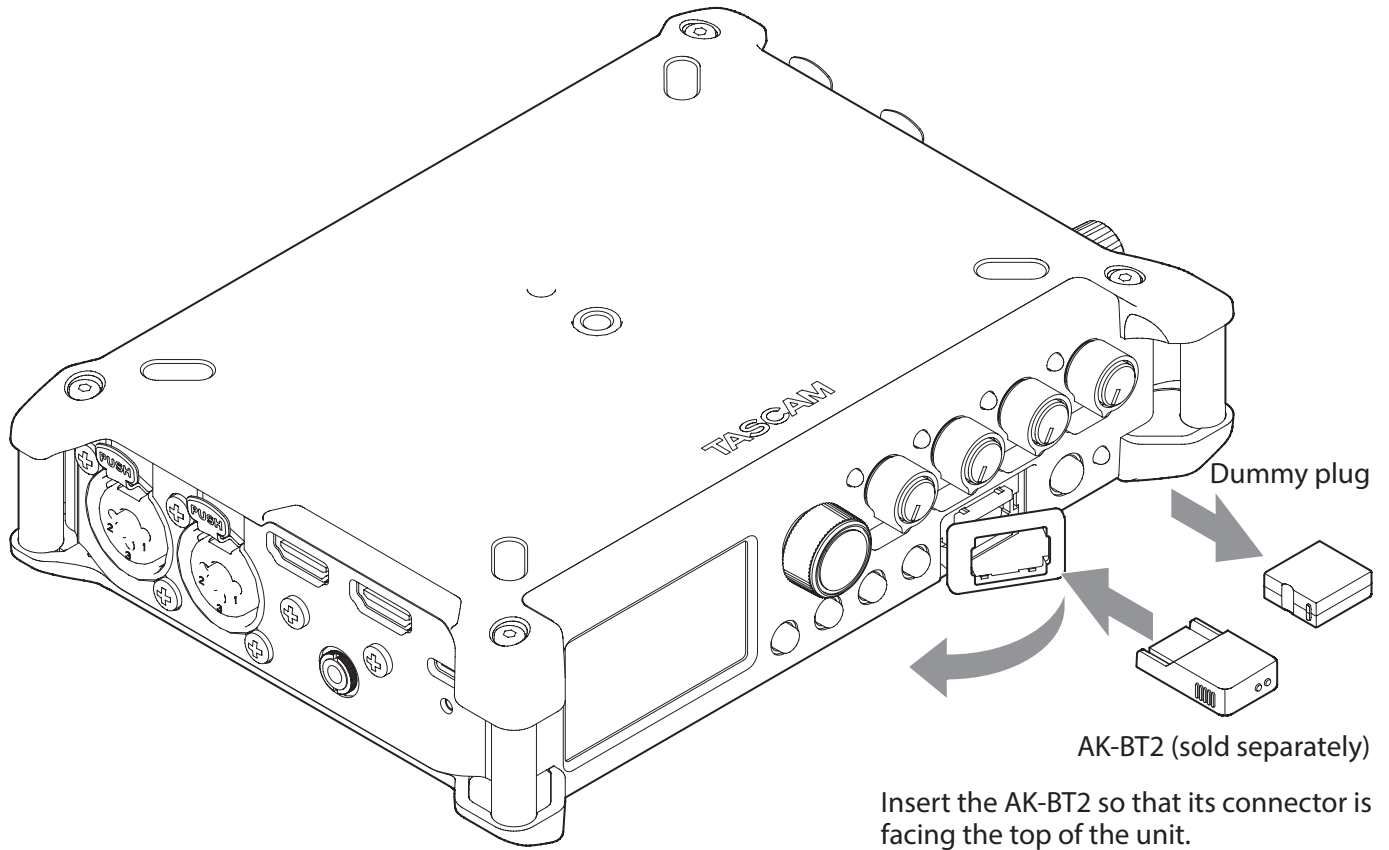

2. Reattach the cover in its original place.

NOTE

If no Bluetooth adapter has been installed, the BLUETOOTH menu items and the TIMECODE menu ATOMOS item will appear gray and cannot be used.

13-3. Connecting with the dedicated control app

CAUTION


- Do not execute pairing from the Bluetooth device list screen of an iOS/iPadOS or Android device. Always launch TASCAM RECORDER CONNECT and conduct pairing.
- When using an Android device, set Location to “On”, and set “Location permission” for TASCAM RECORDER CONNECT to “Allow” or “Allow only while in use”.

1. Enable Bluetooth connection on the smartphone or tablet.

NOTE


Refer to the operation manual of the Bluetooth device for procedures.

2. Launch TASCAM RECORDER CONNECT.

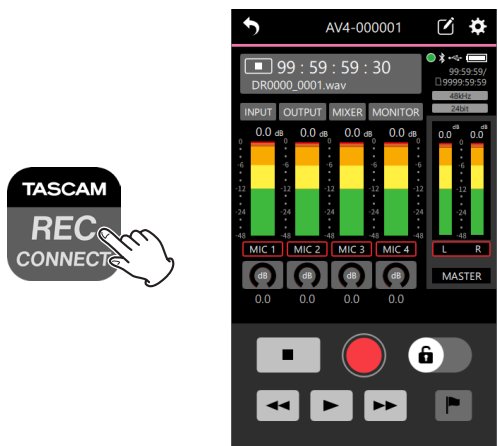

Bluetooth device screen

3. Press the MENU button on the unit and turn BLUETOOTH > REMOTE CONTROL on (). The default is off.

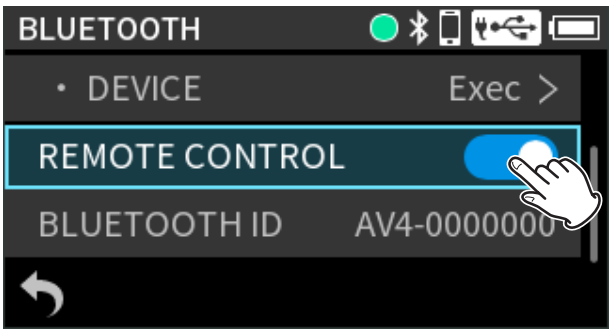

4. Operate the TASCAM RECORDER CONNECT app to connect to the unit.

The connection status can be checked with the blinking state of the smartphone icon at the top right of the Home Screen.

Blinking state	Status
Unlit	Remote control function off
Blinking	Waiting to pair
Lit	Paired

When connection completes, the display of the smartphone or tablet will automatically switch to the operation screen.

NOTE

- See the TASCAM RECORDER CONNECT operation manual for details about using the control app.
- In the control app, this unit will be recognized according to its MENU > BLUETOOTH > BLUETOOTH ID setting.

13. Remote control functions


13-4. Wireless timecode synchronization with supported Atomos products

By connecting an AK-BT2 Bluetooth adapter (sold separately) to this unit, connection is possible to receive timecode from, for example, AtomX SYNC and UltraSync BLUE devices by Atomos Pty Ltd.



Received timecode is written to the files recorded by this unit. Using this timecode data simplifies the aligning of video and audio files created by multiple units.

Connecting with supported Atomos products


1. Press the MENU button on the unit and turn TIMECODE > ATOMOS on (🔴).

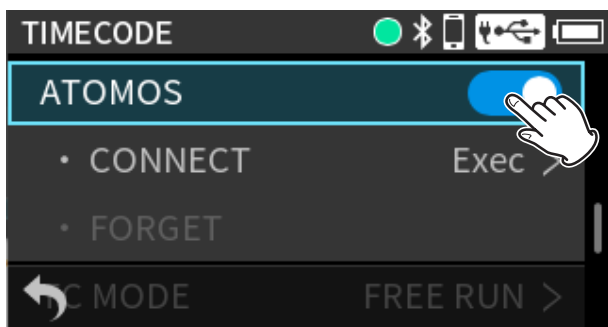

2. Tap ATOMOS • CONNECT.

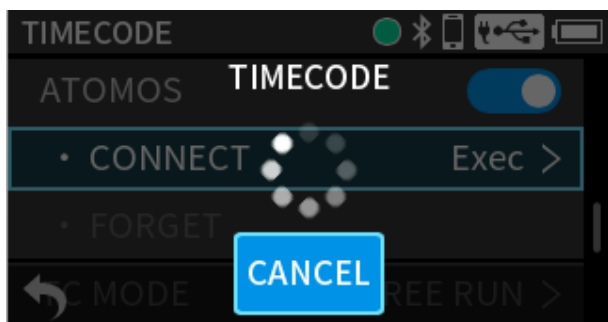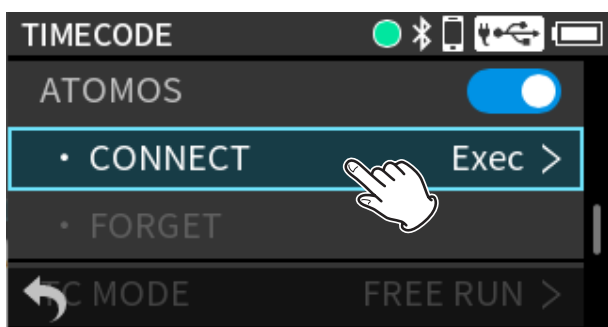

After pairing completes, "CONNECT" will appear dimmed.

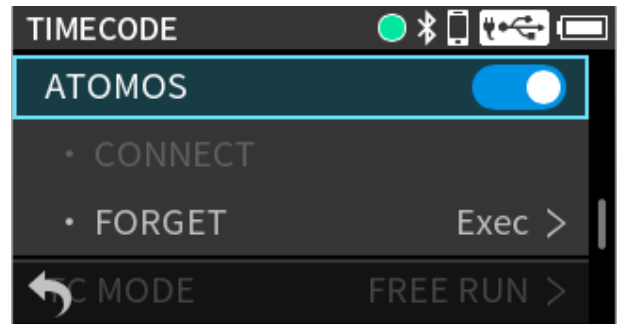

- Pairing operations are also necessary on the Atomos product being paired. For procedures, refer to the operation manual of the product being used.
- Press the MENU button and set SETTINGS > TIMECODE > MASTER to "ATOMOS". (See "14-2. MASTER" on page 119.)
- See "14-7. Timecode information" on page 123 for details about checking timecode information.


Disconnecting from supported Atomos products

Press the MENU button on the unit and turn TIMECODE > ATOMOS off (🔴).


Connecting a different AtomX SYNC,
UltraSync BLUE or similar device

Unpairing first is necessary to switch connection from an already paired AtomX SYNC/UltraSync BLUE or similar device to a different device.


- 1. Press the MENU button on the unit and turn TIMECODE > ATOMOS on ().

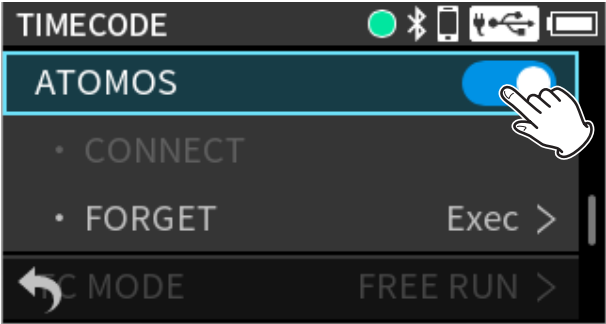

- 2. Tap TIMECODE > ATOMOS • FORGET to clear pairings.

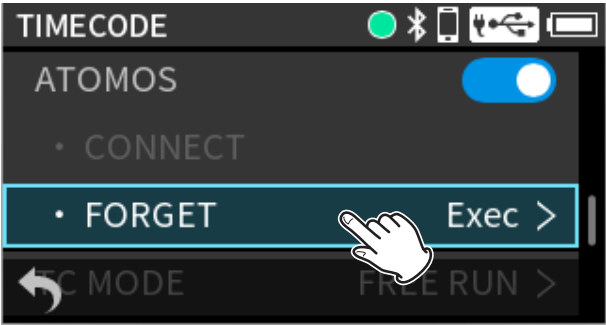

- 3. Follow the procedures in "Connecting with supported Atomos products" again to connect a different AtomX SYNC, UltraSync BLUE or similar device

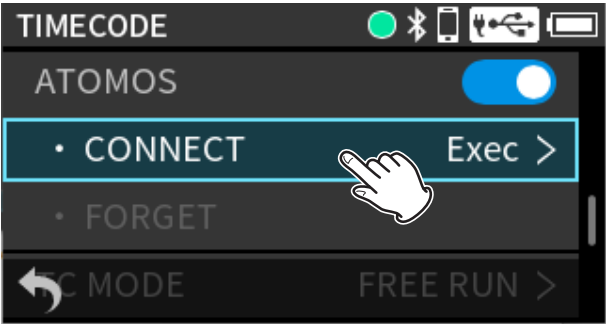

TIMECODE operation status

Blinking green*		Receiving timecode and operating with synchronization
Blinking red*		Running by itself based on the last received timecode
Unlit		Not operating with timecode

* Blinks when connected to AtomX SYNC/UltraSync BLUE

13. Remote control functions

Using remote control while timecode is running free

The remote control app can be used with the unit running free using the timecode that it last received.

1. Synchronize timecode with the supported Atomos product. (See “Connecting with supported Atomos products” on page 116.)
2. End timecode synchronization with the supported Atomos product. (See “Disconnecting from supported Atomos products” on page 116.)

The unit will start running freely based on the last received timecode data.


NOTE

Free running will use the clock position of this unit.

3. Connect with the TASCAM RECORDER CONNECT dedicated control app. (See “13-3. Connecting with the dedicated control app” on page 115.)


The above procedures allow the remote control app to be used with the unit while it is running free using the timecode that it last received.

Press the MENU button and use TIMECODE to open the TIMECODE Settings Menu.

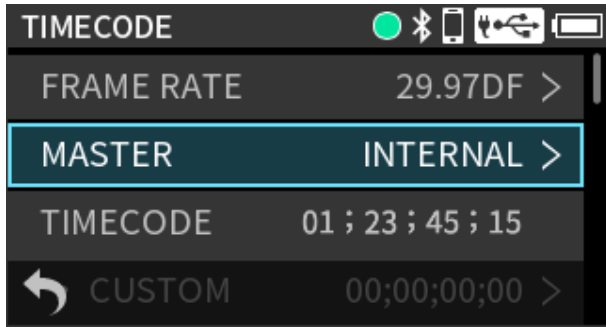

14-1. FRAME RATE

The FRAME RATE can be changed when MASTER is not set to "ATOMOS" or "HDMI".

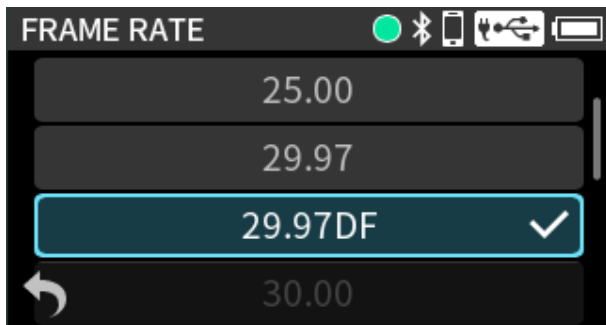


Options: 23.98, 24.00, 25.00, 29.97, 29.97DF (default), 30.00, 30.00DF, 50.00, 60.00

NOTE

- When MASTER is "TC IN (JAM)", FRAME RATE will be set automatically to match the timecode input through the TC IN jack.
- When MASTER is "ATOMOS" or "HDMI", the FRAME RATE being used for operation will be shown.
- When set to 50.00 or 60.00, the actual timecode generated will use 25.00 or 30.00 as the frame rate. Picture can be set to 50.00 or 60.00 frames, but LTC Timecode cannot be set higher than 30.00 frames due to the standard.
For this reason, half the frame rate is normally used to synchronize with timecode when recording video at 50.00 or 60.00 frames.

14-2. MASTER

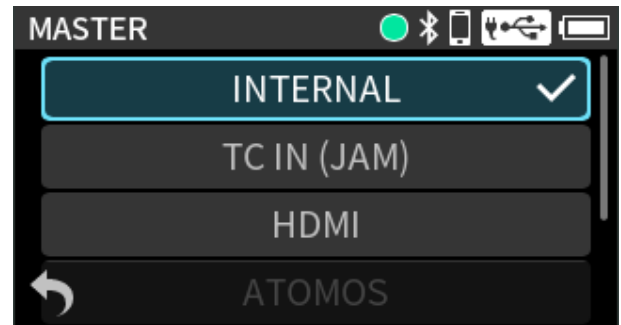

INTERNAL (default)

This sets the FR-AV4 as the timecode master.

Timecode is generated from the time of the unit's built-in clock.

TC IN (JAM)

This sets the timecode input from the TC IN jack as the master. The unit jam syncs according to the input timecode.

HDMI

This sets the timecode input from the HDMI® IN jack as the master.



ATOMOS

This sets Bluetooth timecode from an ATOMOS device as the master.

14. Timecode functions

Receiving timecode through the TC IN jack

Set MASTER to “TC IN (JAM)”.

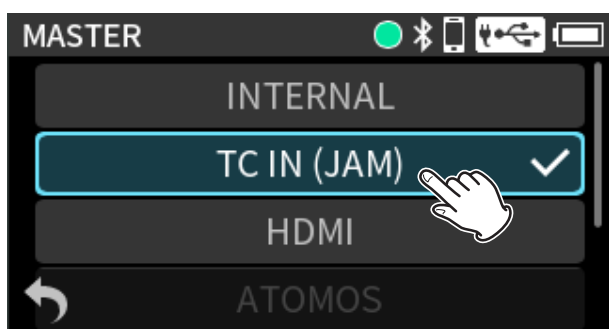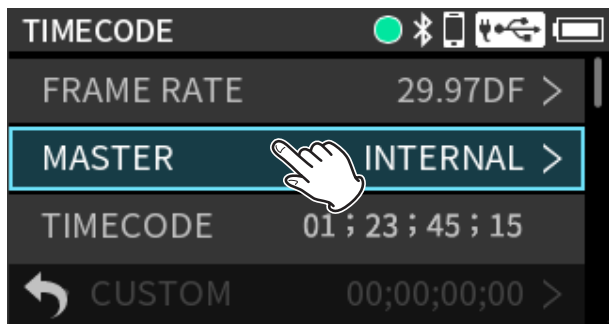

- To receive timecode from the TC IN jack, input must be in the specified level range for LTC (0.5–5.0 Vpp).
- After receiving timecode, if the cable connected to the TC IN jack is disconnected, the unit will run freely based on the last timecode data that it received (jam sync).

Receiving timecode by Bluetooth®

Set MASTER to “ATOMOS” and turn TIMECODE > ATOMOS on. See “13-4. Wireless timecode synchronization with supported Atomos products” on page 116 for details.

Receiving timecode by HDMI®

Set MASTER to “HDMI”.

See “Timecode connection examples” on page 69 for details about device connection.

14-3. Timecode settings

TIMECODE shows the current timecode (hours: minutes: seconds: frames).


Timecode can be restarted by using the RESTART function.



CUSTOM

The timecode can be set to any value.


On the TIMECODE CUSTOM Screen, tap "SET" to restart from the set timecode.

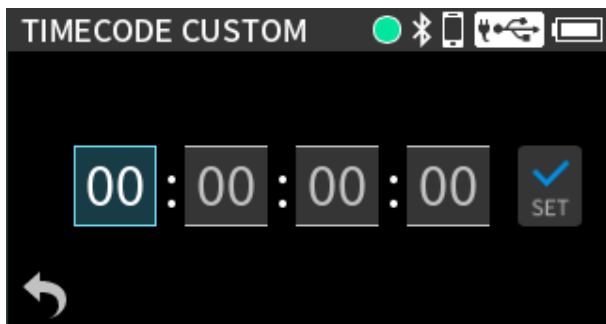

See "Inputting numbers" on page 44 for details about number input.

TIME OF DAY

The timecode will restart from the time of the built-in clock.

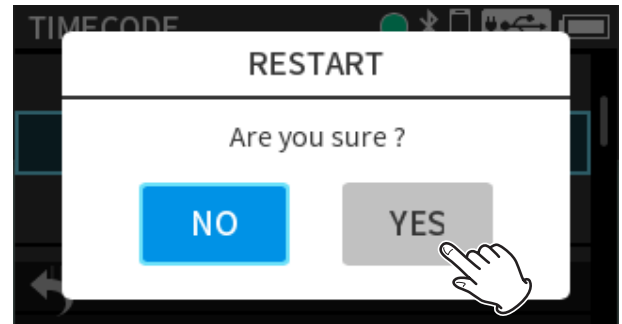

NOTE

If MASTER is set to "ATOMOS" or "HDMI", this will appear gray and RESTART will not be usable. If MASTER is set to "TC IN (JAM)" and timecode is being input, restarting will not occur.

FILE TC OFFSET

The value set for timecode can be offset.

By using this function, timecode values can be aligned if differences occur between the timecodes recorded on the camera and this unit.



CAUTION


This function can only be applied when MENU > TIMECODE > MASTER is set to "HDMI".

NOTE

Differences between audio recorded with video by a camera and audio recorded by this unit might change depending on the camera resolution setting.

14. Timecode functions

14-4. TC MODE

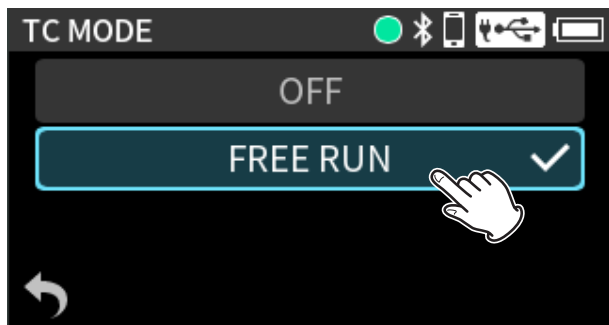

OFF

Timecode will not be used.

Timecode will not be shown on the Home Screen.


FREE RUN (default)

Timecode will be used.

Timecode will be shown on the Home Screen.


14-5. COUNTER VIEW

When TC MODE is “FREE RUN”, the display positions of the counter and timecode on the Home Screen can be switched.

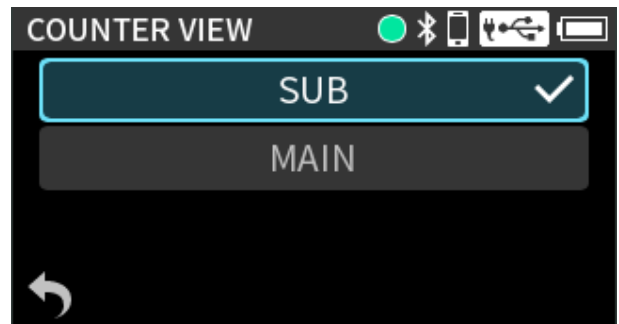


SUB (default)

Timecode will be shown in the timecode area at the top left of the Home Screen.

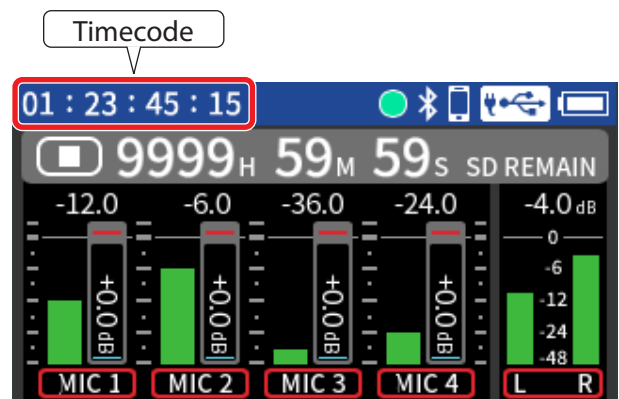

MAIN

Timecode will be shown in the project status bar.

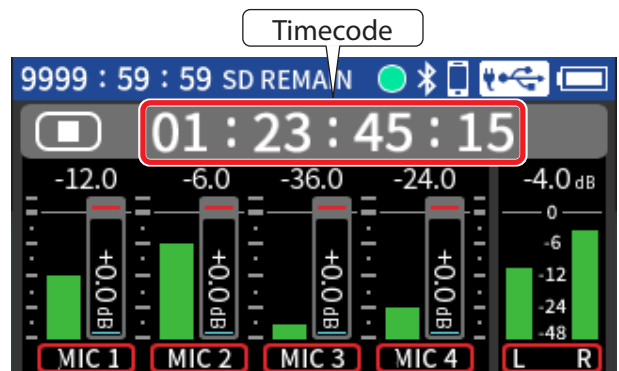

14-6. Outputting timecode

Timecode can be output from the TC OUT jack by setting TC MODE to “FREE RUN”.



LINE OUT

Timecode will be output from the /TC/LINE OUT jack. The R channel outputs LINE OUT audio. Select this to input the timecode output to a camera. (50 mVpp)

Options: Off (default), On

USB OUT



Timecode will be output on one channel of the signal sent to USB. Select this when using a DAW or another app that can receive timecode.

Options: Off (default), On

When outputting audio from the LINE OUT, turn off the LINE OUT item.

14-7. Timecode information

This shows the timecode that is being received or sent.

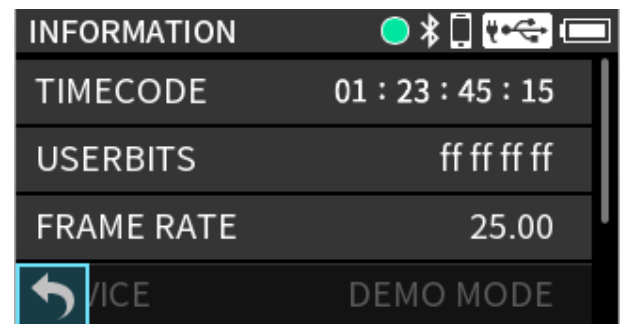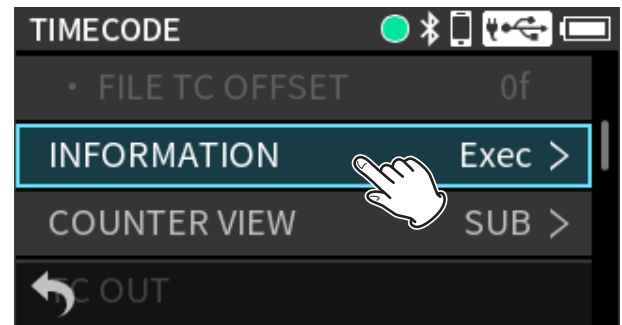

TIMECODE

This shows the timecode as hours: minutes: seconds: frames.

USERBITS

This shows the user bits (date, time, scene number or other chosen data) set on the AtomX SYNC, UltraSync BLUE or another device.

FRAME RATE

This shows the frame rate.

DEVICE

This shows the name of the AtomX SYNC/ UltraSync BLUE or other device.


15. Wireless audio monitoring functions

15-1. Wireless audio monitoring

By connecting an AK-BT2 Bluetooth adapter (sold separately), monitoring sound from this unit can be output to devices that support Bluetooth, including earphones and speakers. (See “13-2. Installing a Bluetooth® adapter” on page 114.)

Press the MENU button and turn on BLUETOOTH > AUDIO MONITORING ().

The default value is off.

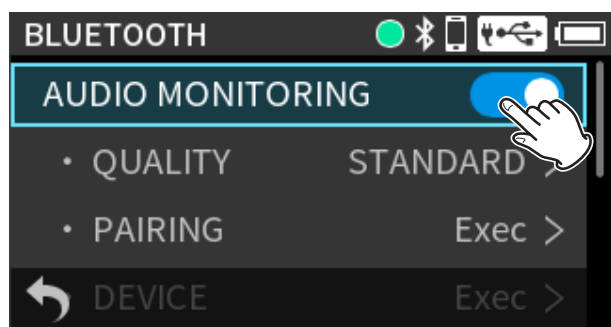

Enable Bluetooth transmission on the earphone, speaker or other device that supports Bluetooth. Then, conduct the following operations.


15-2. Pairing

Pairing this unit with an earphone, speaker or other device that supports Bluetooth is necessary to connect this unit for the first time or to connect with a different Bluetooth-compatible device for the first time.


CAUTION

This display of this unit can only show half-width (normal) alphabet letters and numbers (single-byte). If a device name uses Japanese, Chinese or other full-width characters (double-byte characters), pairing is possible, but the name cannot be shown correctly.

1. Tap “PAIRING”.

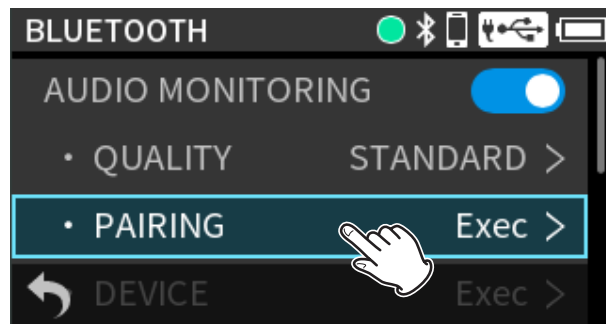

2. Tap the name of the device to connect in the list.

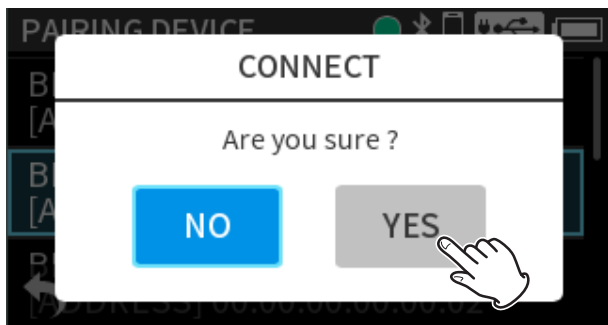

After connection, the normal monitoring sound will be output.

NOTE


This unit can save data for pairings with up to 20 Bluetooth devices.

To add a new pairing when 20 devices have already been saved, delete the data for an unnecessary pairing. (See “15-5. Deleting pairing data” on page 127.)

15-3. Adjusting the volume

Use the headphone VOLUME knob to adjust the volume of wireless audio monitoring.

See “Selecting the headphone volume knob function” on page 82 for details.

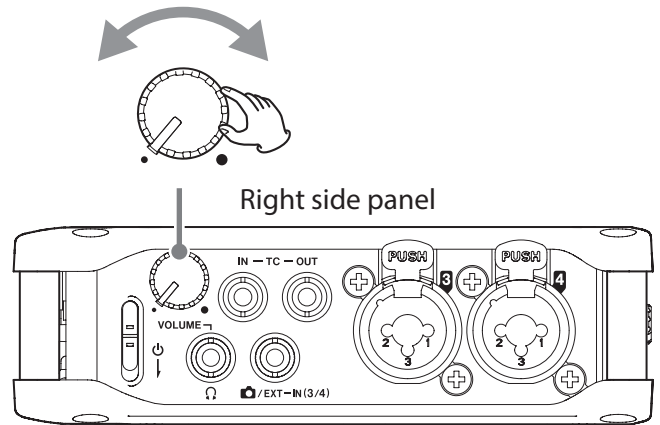


15. Wireless audio monitoring functions

15-4. Connecting with already paired devices

Press the MENU and set BLUETOOTH > AUDIO MONITORING.


1. Tap AUDIO MONITORING • DEVICE.

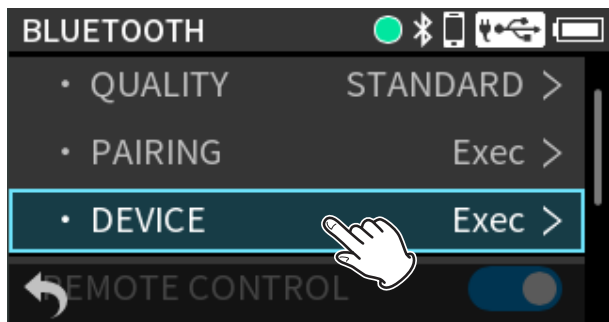


2. Tap the device to connect.



3. Tap "CONNECT".

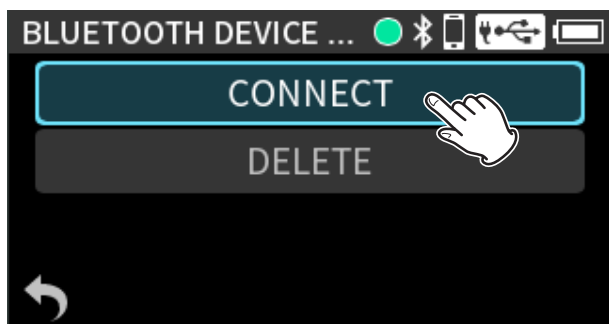

4. Tap "YES".

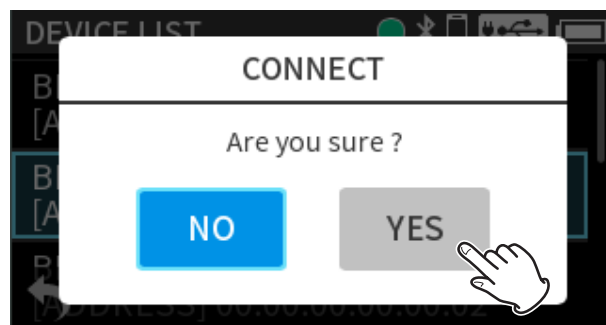

A check will appear next to the device name after connection completes.




15-5. Deleting pairing data

This unit can save pairings with up to 20 Bluetooth devices.

Delete this data to prevent automatic connection.


1. Tap AUDIO MONITORING • DEVICE.

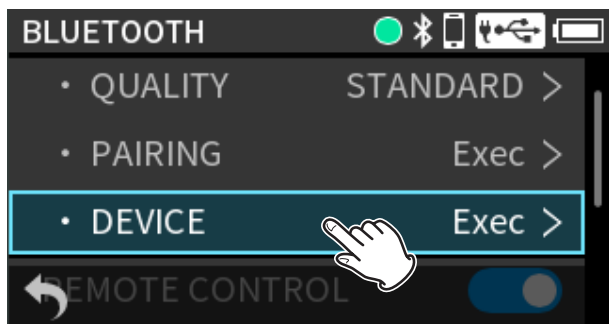


2. Tap the device to delete.



3. Tap "DELETE".

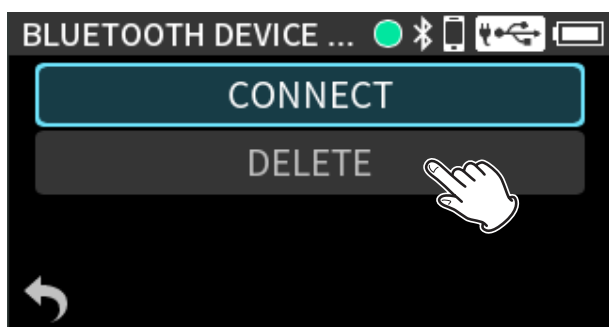


4. Tap "YES".

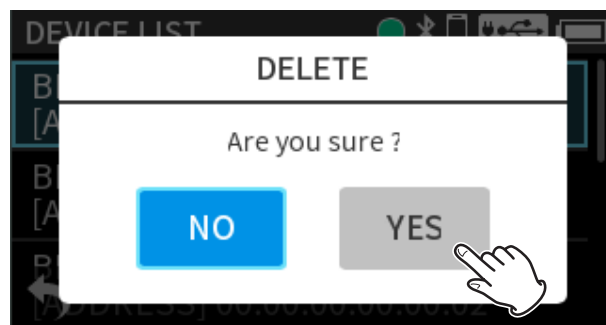


15. Wireless audio monitoring functions

15-6. Quality settings



1. Tap AUDIO MONITORING • QUALITY.

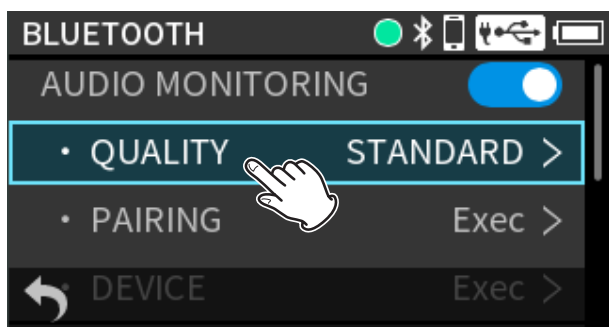

2. Tap a quality to change it.

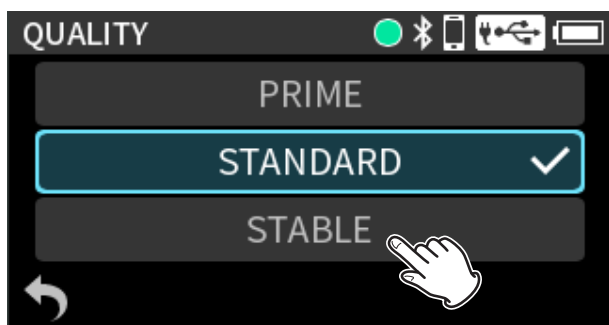

3. Tap "YES".

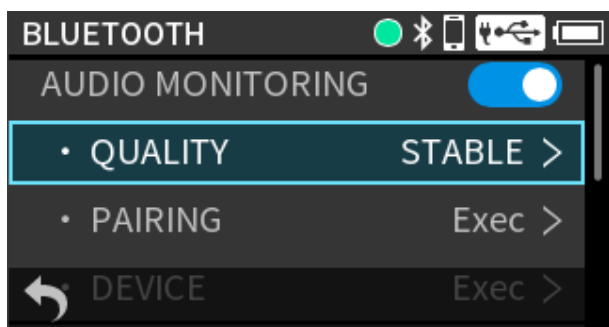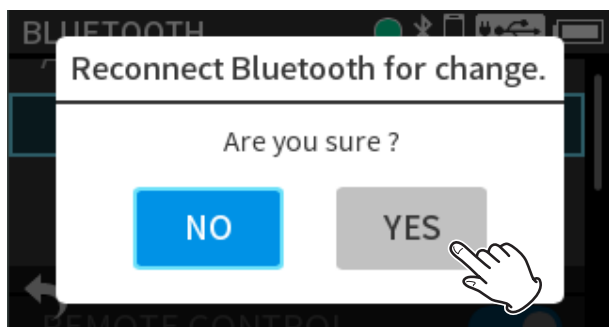

PRIME

This setting prioritizes quality. Connection stability could worsen depending on radio wave conditions.

STANDARD (default)

This setting balances audio quality and connection stability.

STABLE

This setting prioritizes connection stability. The audio quality will be worse compared to other settings because the transmission rate is lowered.

NOTE

The sound of wireless audio monitoring will be slightly delayed compared to the sound being recorded or played by the unit. The delay time could vary depending on the surrounding environment and radio wave conditions.

The delay time is also affected by the QUALITY setting. The order from most to least is PRIME, STANDARD, STABLE.


16-1. Using a 2D code to access the Owner's Manual web page

The URL for a website that has the Owner's Manual can be shown as a 2D code on the display of this unit. By using a device to scan the 2D code, a document page on the website can be accessed.

NOTE

Please be aware that you are responsible for any transmission costs related to Internet connection.

1. Press the MENU button and use INFORMATION > MANUALS to view The DOCUMENT PAGE Screen.

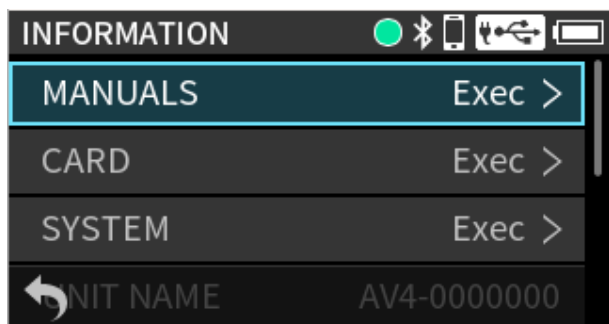


2. Use a smartphone or similar device to scan the 2D code on the display to access a page with the Owner's Manual for this unit.




16-2. Showing various information

Press the MENU button and use INFORMATION.

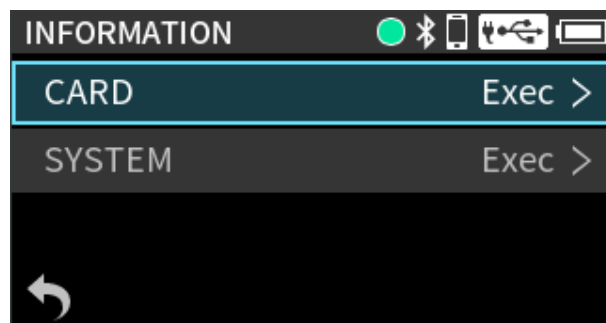


Card information

Press the MENU button and use INFORMATION > CARD to view SD card information.

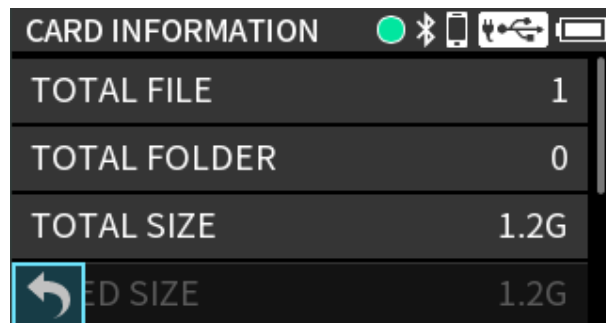

System information

Press the MENU button and use INFORMATION > SYSTEM to view firmware and hardware versions.

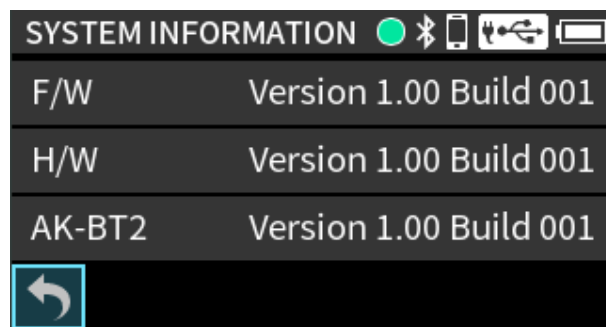

UNIT NAME

This shows the unit name set using the TASCAM RECORDER CONNECT app.

HDMI IN

This shows the name of the source device connected to the HDMI IN port. Depending on the device, acquiring the name might not be possible.

16. Various settings

HDMI OUT

This shows the name of the sync device connected to the HDMI OUT port. Depending on the device, acquiring the name might not be possible.

16-3. Resetting the date and time

Do this by pressing the MENU button and selecting DATE/TIME. See “3-5. Set the date and time” on page 51 for operation procedures.

16-4. Resetting the unit to its factory defaults

Do this by pressing the MENU button and selecting FACTORY PRESET.



NOTE

- This will also delete data added for AUDIO MONITORING. Conduct pairing again.
- The date and time setting is not erased.

16-5. Formatting SD cards

Do this by pressing the MENU button and selecting SD CARD > FORMAT SD. See “3-6. Formatting (initializing) SD cards” on page 53 for operation procedures.

16-6. Using the automatic power saving function

Set this using MENU > POWER/DISPLAY > AUTO POWER SAVE.

When on, the unit automatically turns off after 30 minutes have elapsed since the last activity or operation.

Options: Off (default), On


NOTE

This function only works when the unit is stopped. This function will not cause the unit to turn off during recording or playback.

16-7. Ambisonic mode

To record using ambisonic mics, set the ambisonic mode.

Press the MENU button and set
MS DECODE/AMBISONICS > AMBISONICS.

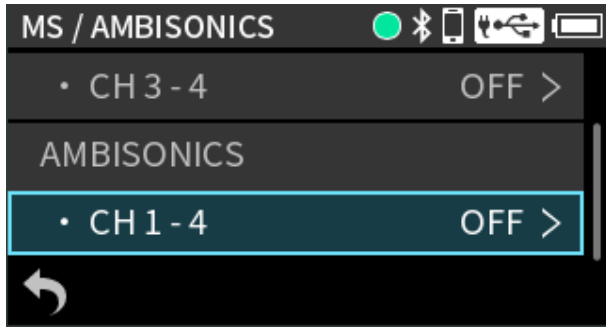

CH 1-4

This sets the ambisonic recording format.

Options: OFF (default), A FORMAT,
B FORMAT (FuMa), B FORMAT (AmbiX)

When AMBISONICS is enabled, use HOME > INPUT > MIC to set the mic orientation.

MIC

This sets the orientation of the ambisonic mic.

UPRIGHT


Record with the mic oriented up

UPSIDEDOWN

Record with the mic oriented down

ENDFIRE

Record with the mic oriented forward

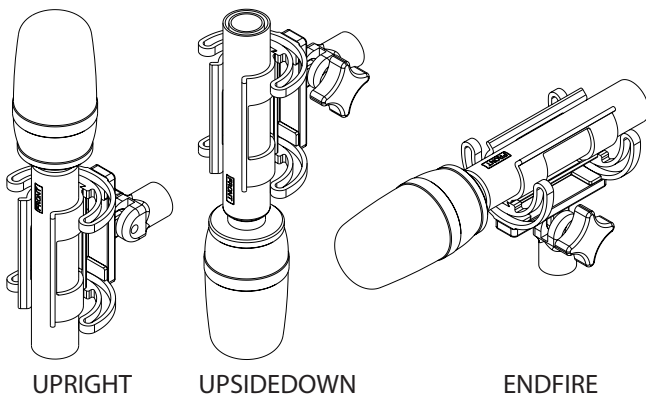

If the ambisonic recording mode is set to anything other than "OFF" settings will change as follows.

- Input settings will be shared by channels 1–4.
- Mixer functions will be disabled.
- Compensation for mic distances (DELAY) will be disabled.
- Input phase inversion (PHASE INVERT) will be disabled.
- Channels 1–4 will be assigned to group 1 in the input GANG settings. All inputs will operate at the same level.
- The plugin power function will be disabled.
- The following table shows the correspondence between input channels and audio signals when ambisonic mode is on.

Setting	1	2	3	4
A format	FLU	FRD	BLD	BRU
B format (FuMa)	W	X	Y	Z
B format (AmbiX)	W	Y	Z	X

16. Various settings

16-8. Selecting the power source

Set this using MENU > POWER/DISPLAY > USB BUS POWER.

OFF

The unit will operate using battery power. No power will be supplied from USB.

ON (default)

The unit will operate using battery power, but USB power supply will be prioritized if power is connected to the USB port.

CAUTION

When selecting BATTERY as the power source, always put batteries in this unit.

NOTE

When connecting this unit with an iOS device, set this to OFF.

16-9. Setting the AA battery type

Set this using MENU > POWER/DISPLAY > BATTERY.

Use this to set the type of battery used.

This setting is used to show the amount of remaining battery charge and determine if the unit has enough power for normal operation.

If this is not set correctly, the power might turn off even if there is enough remaining battery charge.

ALKALI (default)

Alkaline batteries (default)

Ni-MH

Nickel-metal hydride batteries

LITHIUM

Lithium batteries

16-10. Saving and recalling user settings

Do this by pressing the MENU button and using USER PRESET.

Unit settings can be saved (SAVE) and recalled (LOAD). A maximum of 5 presets can be saved.

NOTE

- Before saving and when the FACTORY PRESET is loaded, they will be set to their default values.
- The following settings are not saved.
 - USB BUS POWER (OFF / ON)
 - BATTERY (ALKALI / Ni-MH / LITHIUM)
 - FILE NUMBER

16-11. Power saving (energy conservation) mode

Set this using MENU > POWER/DISPLAY > POWER SAVE MODE.

POWER SAVE MODE

When the power saving mode is on, the following functions are limited to reduce power consumption.

- Only 48 kHz can be selected as the sampling frequency.
- Phantom power is turned off. Condenser mics with balanced connections to XLR jacks cannot be used.
- The backlight illumination time of the display is fixed at 30 seconds.
- The display brightness setting is fixed to MID.
- The peak indicators do not light.
- The display contrast setting is fixed to 10.

BACKLIGHT

This sets the display backlight.

OFF: Backlight always off

5–30 sec: Backlight turns off automatically after set time without operation

ALWAYS: Backlight always stays on (default)

NOTE

The backlight setting is only active during battery operation. The backlight will always stay lit when operating on USB bus power.

BRIGHTNESS

This sets the display backlight brightness.

INDICATORS

This sets how the REC and peak indicators light.

ALL ON: The REC and peak indicators light. (default)

PEAK LED OFF: The peak indicators do not light.

REC LED OFF: The REC indicators do not light.

ALL OFF: The REC and peak indicators do not light.

INDICATORS DIMMER

This lowers the brightness of the REC and peak indicators.

Off (default): Indicators light at regular brightness

On: Indicators light at reduced brightness

NOTE

- When the POWER SAVE MODE is on, backlight, brightness and indicator settings cannot be made.
- If the POWER SAVE MODE is on when operating using battery power, the backlight will dim after 30 seconds without use.
Pressing a button will cause the backlight to light, making operation possible.

16-12. Adjusting the display contrast

Set this using MENU > POWER/DISPLAY > CONTRAST.

The display contrast can be set between 0 and 20.

The default value is 10.

16-13. Setting peak hold time

The amount of time that peak indicators 1–4 stay lit as well as the peak hold display for the level meters can be changed.

Press the MENU button and use PREFERENCES > PEAK HOLD to set this.

Options: OFF (no peak hold), 1 sec (default),
2 sec, 10 sec, HOLD (stay held)

NOTE

When the Home Screen is open, turning the DATA dial will reset peak hold display.

16. Various settings

16-14. Menu items

Structure of the Menu Screen

The menus shown depend on the use and operation conditions of the unit.

Menu Screen (when stopped) - page 1

MIXER	page 135
PHANTOM	CH1/CH2/CH3/CH4, +24V/+48V (default) page 74
PHONES VOLUME	page 82
BLUETOOTH	page 135
BROWSE	page 135
SD CARD	page 136
TIMECODE	page 136
HDMI AUDIO ASSIGN	page 136

Menu Screen (when stopped) - page 2

REC SETTINGS	page 136
INPUT KNOB SETTINGS	page 137
MS DECODE/AMBISONICS	page 137
OUTPUT	page 135
MARK/SLATE TONE	page 137
AUTO MIXER	page 139

Menu Screen (when stopped) - page 3

PREFERENCES	page 137
DATE/TIME	page 130
INFORMATION	page 138
POWER/DISPLAY	page 137
FACTORY PRESET	page 130
USER PRESET	page 138

Menu Screen (when recording)

MIXER	page 135
OUTPUT	page 135
PHONES VOLUME	page 82
BLUETOOTH	page 135
INPUT KNOB SETTINGS	page 137
AUTO MIXER	page 139

Menu Screen (when transport active)

HOME	page 54
OUTPUT	page 135
PHONES VOLUME	page 82
BLUETOOTH	page 135
BROWSE	page 135
MONITOR	page 88
MIXER	page 135
AUTO MIXER	page 139

Menu details

MIXER		page 59
— PAN	L20 – L1, C (default), R1 – R20	page 60
— FADER	10 dB – 0 dB (default) – –inf	page 60
— MASTER FADER	10 dB – 0 dB (default) – –inf	page 61
— MASTER REC ENABLE	Off / On (default)	page 61

OUTPUT		
— OUTPUT LEVEL	–60, –59 – 0 dB (default)	page 82
— OUTPUT	LINE (default), CAMERA	page 82
— LIMITER	Off (default) / On	page 82
— DELAY	0 (default) – 300ms	page 82

BLUETOOTH		page 114
— AUDIO MONITORING	Off (default) / On	page 124
— QUALITY	PRIME, STANDARD (default), STABLE	page 128
— PAIRING	Exec	page 124
— DEVICE	Exec	page 126
— REMOTE CONTROL	Off (default) / On	page 115
— BLUETOOTH ID		page 115

BROWSE		page 99
— FILE		page 102
— SELECT		
— FILE DELETE		
— RENAME	Exec	
— CHANGE PROTECT		
— FILE INFORMATION		
— MARK	Exec	
— FOLDER		page 101
— OPEN		
— RENAME	Exec	
— ALL FILES DELETE		
— FOLDER DELETE		

16. Various settings

SD CARD

SD CARD READER	Exec	page 108
FORMAT SD	QUICK FORMAT, ERASE FORMAT	page 53

TIMECODE

page 119

FRAME RATE	23.98, 24.00, 25.00, 29.97, 29.97DF (default), 30.00, 30.00DF, 50.00, 60.00	page 119
MASTER	INTERNAL (default), TC IN (JAM), HDMI, ATOMOS	page 119
TIMECODE		page 121
CUSTOM	Exec	page 121
TIME OF DAY	Exec	page 121
FILE TC OFFSET	-10 f – 0 f (default) – +10 f	
INFORMATION	Exec	page 123
COUNTER VIEW	SUB (default), MAIN	page 122
TC OUT		page 123
LINE OUT	Off (default) / On	
USB OUT	Off (default) / On	
ATOMOS	Off (default) / On	page 116
CONNECT	Exec	page 116
FORGET	Exec	page 117
TC MODE	OFF, FREE RUN (default)	page 122

HDMI AUDIO ASSIGN

page 86

HDMI 1–2	OFF, CH 1–2, CH 3–4, MASTER (default)
HDMI 3–4	OFF (default), CH 1–2, CH 3–4, MASTER
HDMI 5–6	OFF (default), CH 1–2, CH 3–4, MASTER
HDMI 7–8	OFF (default), CH 1–2, CH 3–4, MASTER

REC SETTINGS

page 90

SAMPLING RATE	48kHz (default), 96kHz, 192kHz	
BIT DEPTH	24bit, 32-bit float (default)	
POLY	Off (default) / On	
MASTER REC ENABLE	Off / On (default)	
DUAL FORMAT	Off (default) / On	page 90
PRE REC	Off (default) / On	page 91
FILE NAME	TEXT, DATE (default), UNIT NAME	page 97
TEXT	AV4-00000 (default)	page 97
NUMBER	Exec	page 97

INPUT KNOB SETTINGS

— GANG	Exec	page 83
— MIN MUTE	Off (default) / On	page 84
— HOLD	Off (default) / On	page 84

MS DECODE/AMBISONIC

— MS DECODE		page 85
— CH 1–2	OFF (default), REC, MONITOR	
— CH 3–4	OFF (default), REC, MONITOR	
— AMBISONICS		page 131
— CH 1–4	OFF (default), A FORMAT, B FORMAT (FuMa), B FORMAT (AmbiX)	

MARK/SLATE TONE

— MARK		page 104
— SKIP MODE	OFF (default), ALL, MANUAL, TIME, PEAK, BUFFER OVERFLOW (BOF)	
— TIME MARK	OFF (default), 5min, 10min, 15min, 30min, 60min	page 104
— PEAK MARK	Off (default) / On	page 104
— SLATE TONE		page 107
— AUTO TONE	OFF (default), HEAD, HEAD+TAIL	page 107
— TONE LEVEL	-12dB, -18dB (default), -24dB, -30dB, -36dB	page 107
— OSCILLATOR	Exec	page 107

POWER/DISPLAY**page 130**

— AUTO POWER SAVE	Off (default) / On	page 132
— USB BUS POWER	Off / On (default)	page 132
— BATTERY	ALKALI (default), Ni-MH, LITHIUM	page 132
— POWER SAVE MODE	Off (default) / On	page 133
— BACKLIGHT	OFF, 5sec, 10sec, 15sec, 30sec, ALWAYS (default)	
— BRIGHTNESS	LOW, MID (default), HIGH	
— INDICATORS	ALL ON (default), PEAK LED OFF, REC LED OFF, ALL OFF	
— INDICATORS DIMMER	Off (default) / On	
— CONTRAST	0 – 10 (default) – 20	

PREFERENCES

— Fn KEY	MARK, SLATE, SLATE, MIXER, PHANTOM, PHONES VOLUME, BLUETOOTH, BROWSE, SD CARD, TIMECODE, HDMI, AUTO MIXER	page 46
— PEAK HOLD	OFF, 1 sec (default), 2 sec, 10 sec, HOLD	page 133
— USB RETURN	CH INPUT (default), MASTER	page 111

16. Various settings

INFORMATION

— MANUALS	Exec	page 129
— CARD	Exec	page 129
— SYSTEM	Exec	page 129
— UNIT NAME	FR-AV4 (default)	page 129
— HDMI IN		page 129
— HDMI OUT		page 130

USER PRESET

page 132

— SAVE	USER PRESET 1–5
— LOAD	USER PRESET 1–5

INPUT

— CH ENABLE	Off (default) / On	page 72
— REC ENABLE	Off (default) / On	page 72
— PHANTOM	Off (default) / On	page 74
— INPUT	MIC (default), LINE, EXT (CH 3-4 only), USB	page 72
— STEREO LINK	Off (default) / On	page 73
— KNOB HOLD	Off (default) / On	page 73
— PLUG IN POWER	OFF (default), 2.5V, 5V	page 75
— MIC	UPRIGHT (default), UPSIDEDOWN, ENDFIRE	page 131
— DELAY	0 (default) – 300ms	page 75
— LOW CUT	OFF (default), 40Hz, 80Hz, 120Hz, 220Hz	page 76
— LIMITER	Off (default) / On	page 76
— EQ	OFF (default), ON (Exec)	page 76
— NOISE GATE	OFF (default), LOW, MID, HIGH	page 78
— PHASE INVERT	Off (default) / On	page 78
— PRESET SAVE	PRESET 1, PRESET 2, PRESET 3, PRESET 4, PRESET 5	page 79
— PRESET LOAD	PRESET 1, PRESET 2, PRESET 3, PRESET 4, PRESET 5	page 80

EQ

page 76

— LOW GAIN	–12 dB – 0 dB (default) – +12 dB (1 dB steps)
— LOW FREQ	32 Hz–1.6 kHz (default: 400 Hz)
— L-MID GAIN	–12 dB – 0 dB (default) – +12 dB (1 dB steps)
— L-MID FREQ	32 Hz–18.0 kHz (default: 1.7 kHz)
— L-MID Q	0.25, 0.5, 1.00, 2.00 (default), 4.00, 8.00, 16.00
— H-MID GAIN	–12 dB – 0 dB (default) – +12 dB (1 dB steps)
— H-MID FREQ	32 Hz–18.0 kHz (default: 1.7 kHz)
— H-MID Q	0.25, 0.5, 1.00, 2.00 (default), 4.00, 8.00, 16.00
— HIGH GAIN	–12 dB – 0 dB (default) – +12 dB (1 dB steps)
— HIGH FREQ	1.7 kHz–18.0 kHz (default: 5.5 kHz)

17. Firmware version upgrade changes

17-1. FR-AV4 V1.10 overview

The AUTO MIXER function was added in FR-AV4 version 1.10.

AUTO MIXER function overview

The AUTO MIXER is a function for reducing mixing work when recording talks and meetings. The AUTO MIXER in the FR-AV4 uses a gain sharing technique to realize natural-sounding mixes of situations with multiple speakers while suppressing noise.

Features

Gain sharing technique

While maintaining a fixed total gain for multiple channels, gain shares are automatically allocated with priority given to channels that have people speaking.

Noise reduction

The noise level of the mix is reduced by lowering the gain of channels that do not have speaking.

Excessive input prevention

Excessive input to the mix is prevented by maintaining a fixed total gain level.

Simple parameters

- Separate on/off for every channel
- Weight (gain allocation adjustment when silent)


NOTE

- The AUTO MIXER only effects channels when it is turned on for them.
- This function is not suitable for use with music.
- The AUTO MIXER function is enabled only when the sampling frequency is 48 kHz.
- If MS DECODE or AMBISONICS is enabled, the AUTO MIXER function will be disabled.


Using the AUTO MIXER function

1. Adjust input levels so that they are about the same for the voice of each speaker.
Set all the Mixer Screen faders to 0 dB.

2. Press the MENU button.
The Menu Screen will open.

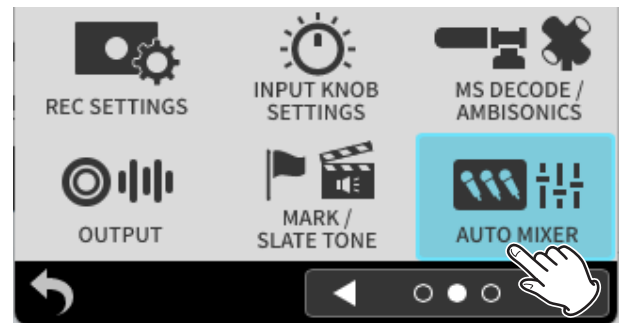

3. Select AUTO MIXER.
This opens the AUTO MIXER Screen.
4. Tap channels to turn on the AUTO MIXER function for them.

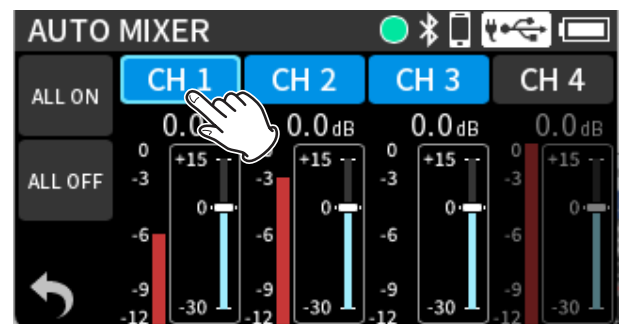


The ALL ON and ALL OFF buttons can be used to turn all channels on/off at once.

17. Firmware version upgrade changes

5. Adjust the WEIGHT slider for each channel.

When no one is speaking, adjust the WEIGHT sliders so that the gain level meters of all channels are equal.

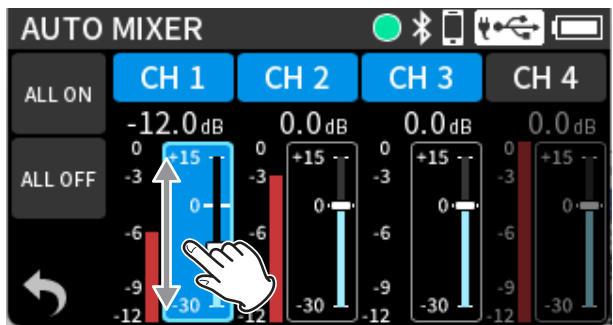


NOTE

- The gain level meter values show the allocation of gain to each channel.
- The WEIGHT parameter is for balancing noise levels when silent.

This can be adjusted between +15 dB and –30 dB (0 dB by default) in 0.5dB increments.

Checking auto mixer status

On the HOME/MIXER Screen, AUTO MIXER status can be checked with the [A] icons.

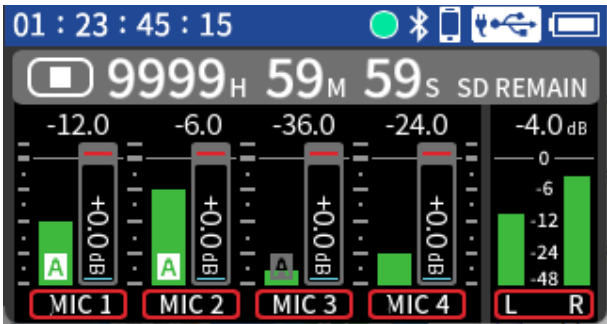

AUTO MIXER set-ting	Gain level meter	[A] icon
On	–12 dB or higher	
On	Less than –12 dB	
Off	0 dB	No indicator

Fader operation on the Mixer Screen

If a speaker's voice is too loud or too quiet, adjust the fader slightly on the Mixer Screen.

The following is a list of the pop-up messages. Refer to this list if one of these pop-up messages appears on the FR-AV4 and you want to check the meaning or determine a proper response.

Message	Details and response
No Card	Load an SD card.
Card Error	The SD card was not recognized. Replace the SD card.
Card Full	The SD card has no remaining capacity.
Format Error Format Card	The SD card is not formatted properly or the card is broken. Select "OK" to start formatting. Formatting will erase all the data on the SD card.
Invalid Card Change Card	Something might be wrong with the SD card. Replace the SD card.
MBR ERROR Init CARD	The SD card is not formatted properly or the card is broken. Tap the screen to start formatting. Formatting will erase all the data on the SD card. If formatting is not possible, change the SD card.
Write error Recording will continue	Writing to the SD card timed out. This has caused audio to be interrupted and noise to occur. A BOF mark was added at the point when audio was interrupted.

Message	Details and response
Card slow Check BOF mark	SD card writing performance has become worse. A BOF mark has been added at the point when audio was interrupted because writing to the SD card timed out. Check the audio around the BOF mark. Execute the erase format function or change the SD card.
Invalid SysFile Make Sys File	The system file required to operate this unit is invalid. Replace the SD card or tap the screen to create a system file.
Non- Supported	The file cannot be played by this unit. Please see "Recording/playback formats" on page 147 for file formats that this unit can use.
File Num Full	Recording is not possible because the total number of folders and files would exceed the limit of 1000.
File Not Found	The file was not found or might be damaged. Check the relevant file.
Cannot delete because file protected	Remove protection from a file before trying to delete it.
Can't delete Not empty	Folders that contain files cannot be deleted. Delete all the files in the folder and try again.
Adding marks not possible because file protected	Marks cannot be added because the file is protected from writing. Remove protection from a file to add marks to it.

18. Messages

Message	Details and response
Can't MARK File length	Marks cannot be added because the file is too short.
File error Error occurred Playback Error Writing Failed	If any of these errors occur, turn the unit off and restart it.
System error AA (AA is a number)	If the unit cannot be turned off, remove the batteries and disconnect external power supplies. If these error messages continue to appear frequently, please contact a TASCAM customer support service.
USB FS Mismatch Don't show this message again	The sampling frequency settings of this unit and the USB computer audio interface are not the same. Change the setting of one so that they are the same. Select "YES" if you do not want to see this message again.
Set FS to 96kHz or 48kHz Don't show this message again	USB audio cannot be used because the unit's sampling frequency is 192 kHz. Set the sampling frequency to 96 or 48 kHz to use USB audio. Select "YES" if you do not want to see this message again.
Battery is overheated. Change to USB power supply.	The internal temperature has become higher when using AA batteries. Continued use is possible by providing USB power.
Device is overheated. Turn off the power.	The internal temperature has become higher. The system will shut down automatically.
No track selected	No recording track has been selected. Turn input on for tracks to be recorded on the Input Screen. (See "Setting channels to record" on page 72.)

Message	Details and response
USB Bus Power < 1500mA	Use of a function that cannot be used when power is less than 1.5 A was attempted. Connect an external power supply that can provide at least 1.5 A, or set the unit to operate using battery power and disable energy-saving mode.
Battery is overloaded Use USB power or turn off Phantom.	The battery load has become high when using AA batteries. Switch to USB power supply or turn off phantom power in order to continue use.
Battery is overloaded Phantom has been powered off.	Phantom power was turned off because the battery load became high when using AA batteries.
SD CARD cluster size error	Recording is not possible because the cluster size of the SD card is incorrect. After backing up the content of the SD card to a computer, use this unit to format it. Then, restore the data from the computer. If this appears while formatting the SD card, it cannot be formatted by this unit. Format it with a computer, for example, using the following settings. For SDXC cards of 128 GB or less: exFAT file system, 128kb cluster size (allocation unit size) For SDXC cards larger than 128 GB: exFAT file system, 256kb cluster size (allocation unit size)

Message	Details and response
Unable to determine AC adapter 1.5A or more Switch to power save mode	The unit was unable to determine whether the USB power supply has a supply capability of at least 1.5 A. If it does not have a supply capability of at least 1.5 A, select "YES" and use power save mode. If it does have a supply capability of at least 1.5 A, select "NO" and use regular mode.(See "16-11. Power saving (energy conser- vation) mode" on page 133.)

19. Troubleshooting

If you are having trouble with the operation of this unit, please check the following before seeking repair. If these measures do not solve the problem, please contact the store where you bought the unit or TASCAM customer support service.

Power will not turn on

- Confirm that batteries are installed correctly.
- The unit cannot be used with USB power supply if the USB BUS POWER menu item is off. Install batteries.
- Confirm that the TASCAM PS-P520U AC adapter (sold separately) power plug and the USB connector are securely connected. The unit might not operate properly through a USB hub.

The unit turns off automatically

Confirm that the automatic power saving function is disabled. (See "16-6. Using the automatic power saving function" on page 130.)

Operation is not possible using the unit controls

Unit operations are not possible when "SD CARD READER" appears on the screen.

The SD card is not recognized

- Confirm that the SD card is inserted completely.
- Format it with a computer, and reinsert it.
- Is the SD card on the list of media confirmed for operation?

No sound is output

- Check the unit's headphone output level.
- Check the monitoring system connections and volume level.

Unusual sound is output from the LINE OUT

When outputting audio from the LINE OUT, press the menu button and turn TIMECODE > TC OUT > LINE OUT off. (See "14-6. Outputting timecode" on page 123.)

Recording is not possible

- Confirm that the SD card has enough open space.
- Recording becomes impossible when the total number of folders and files reaches 1000.

Recording will not stop

Press and hold the REC button until recording stops. (See "6-2. Stopping recording" on page 87.)

The input sound is extremely quiet or loud

- Check the input level setting. (See "5-3. Adjusting input levels" on page 81.)
- Confirm that input settings are selected suitably for the connected equipment. (See "5-1. Making input settings for each input" on page 71.)
- Check the output levels of connected external equipment.

Cannot adjust input levels with INPUT Level knobs

- Adjustment is not possible if the KNOB HOLD setting is on for input channels. (See "Locking input levels" on page 73.)
- Adjustment is not possible when recording if MENU > REC SETTINGS > REC AND HOLD is on. (See "Fixing input levels while recording" on page 84.)

Playback will not stop

Press and hold the ► / || button. (See “8-2. Stopping playback” on page 93.)

A file cannot be erased

A protected (read only) file cannot be erased.


This unit's files do not appear on the computer

- Confirm that the USB cable being used can transmit data. USB cables designed only for charging cannot be used to connect to computers.
- Confirm that the unit is properly connected to the computer using its USB port. The unit might not operate properly if connected through a USB hub.
- To show this unit's files on a computer, after connecting it to the computer using a USB cable, the unit must be set to SD CARD READER. (See “Setting this unit for use as a card reader” on page 108.)

Noise is occurring

If this unit is near a mobile phone, TV, radio, power amplifier or other device with a large transformer, noise could occur with this unit or other devices nearby.

Headphone volume is low

Use the  (headphone) volume to adjust the volume. (See “Adjusting the headphone output volume” on page 67.)

The date/time is incorrect

This can be set again using MENU > DATE/TIME. (See “3-5. Set the date and time” on page 51.)

Menu Screen cannot be opened

The menu items that can be shown are limited when the unit is recording, playing back or paused. Stop recording or playback before pressing the MENU button.

A file is not recognized


- Recognizing files correctly becomes impossible when the total number of files exceeds 1000.
- Subfolders below the third level cannot be shown.
- This unit cannot show files that are not in the SOUND folder. (See “9-2. File and project structure overview” on page 98.)
- Only files in MP3 and WAV formats, including BWF, will be shown.
- Files that are damaged cannot be shown correctly by this unit.

Remaining battery charge shown is strange

Set the battery type. (See “16-9. Setting the AA battery type” on page 132.)

Batteries run out of power quickly

Try the following.

- Use power saving. (See “16-11. Power saving (energy conservation) mode” on page 133.)
- Reduce the backlight time.
- Turn off all indicators.
- Reduce the brightness.
- Reduce the contrast.
- Use the  (headphone) volume knob to lower the headphone volume.
- Disconnect input and output devices that are not in use.

19. Troubleshooting

The screen is dim

Set the backlight to stay lit always. (See “16-11. Power saving (energy conservation) mode” on page 133.)

NOTE

The screen will always be dim if the MENU > POWER/DISPLAY • BACKLIGHT setting is “OFF”.

Volume is low when monitoring audio by Bluetooth® (when using an AK-BT2)

- The volume of the Bluetooth headphones or speakers might be lowered. Try operating them to raise the volume.
- Adjust the volume of wireless audio monitoring output. (See “5-4. Output settings” on page 82.)

Cannot connect to a Bluetooth® device for audio monitoring (when using an AK-BT2)

- Confirm that the Bluetooth device is in a state that allows connection.
- Pairing might not be possible if the device and this unit are far apart. Try moving this unit and the other Bluetooth device closer together.
- Try pairing again. (See “15-2. Pairing” on page 124.)
- Depending on the status of the Bluetooth device, connection with this unit might not be possible. Turn off the power of the Bluetooth device and turn it on again. Then, try reconnecting it.

Sound is not input from mics

- Turn on the phantom power setting if using mics that require it. (See “Using phantom power” on page 74.)
- When connecting an XLR connector to an XLR jack, insert it until a clicking sound is made.
- Turn on the plug-in power setting if using a mic that requires it. (See “Setting plug-in power” on page 75.)

The power cannot be turned off

The unit cannot be turned off when it is record ready or recording. Stop recording before doing this.

Recorded files are divided

- If a file size exceeds 4 GB when recording, the unit will automatically continue recording in a new file (file incrementation). See “9-1. File name overview” on page 96 for information about file names.
Use a DAW or other audio editing software to, for example, combine files that have been divided.
- When the POLY recording setting is on, multiple channels of audio are recorded in a single file, so the time until division occurs is shortened.

“SAFE MODE” appears on the touchscreen when the unit is turned on

The unit is operating in safe mode because a firmware update was unable to complete. Please conduct the firmware update again.

20-1. Specifications and ratings

Recorder specifications

Recording media

SD/SDHC/SDXC cards (512 GB maximum)

Recording/playback formats

WAV(BWF)

Sampling frequency: 48/96/192 kHz

Quantization bit depth: 24-bit/32-bit float

Metadata support: BEXT, iXML

MP3

Sampling frequency: 48 kHz

Bit rate: 128/192/256/320 kbps

Number of channels

4

Number of recording/playback tracks

6 recording/playback (4 inputs + 2-ch master mix)

Timecode

Mode

OFF / Free Run (Custom, Time of Day),

File TC Offset

Sync master

Internal / TC In / HDMI® / ATOMOS¹ supported

Jam Sync

Output

TC OUT, Camera/TC/LINE OUT, HDMI®, USB -C

Frame Rate

23.98, 24, 25(50), 29.97(59.94),

29.97DF(59.94DF), 30(60) fps²

¹ AK-BT2 Bluetooth adapter is required

² For video with frame rates of 50 fps and higher, timecode of half the frame rate is used.

Analog audio input ratings

Mic/line inputs jacks 1–4 (balanced)

Connectors: XLR/TRS combo jacks

XLR3-31 equivalent (1: GND, 2: HOT, 3: COLD)

Supports phantom power only when MIC input selected

6.3 mm standard TRS jacks (balanced)

(Tip: HOT, Ring: COLD, Sleeve: GND)

TRS jacks do not support phantom power

When MIC input selected

Maximum input level: +4 dBu

Minimum input level: –76 dBu

Input impedance: 2.0 kΩ or more

Phantom power: +24V or +48V (selectable when MIC input selected)

When LINE input selected

Maximum input level: +24 dBu

Nominal input level: +4 dBu (GAIN setting at minimum)

Input impedance: 8 kΩ or more

Line input (unbalanced): /EXT IN jack (can provide plug-in power)

Connector: 3.5 mm (1/8") stereo mini jack

(Tip: L ch, Ring: R ch, Sleeve: GND)

Input impedance: 6 kΩ or higher (when plug-in power is off)

1.6 kΩ or higher (when plug-in power is on)

Nominal input level: –19 dBV (GAIN setting at minimum)

Maximum input level: +1 dBV

Minimum input level: –79 dBV

Plug-in power: +2.5 V / +5.0 V

20. Specifications

Analog audio output ratings

Line output (unbalanced): /TC/LINE OUT jack

Connector: 3.5 mm (1/8") stereo mini jack

/LINE OUT (Tip: L ch, Ring: R ch, Sleeve: GND)

Output impedance: 210 Ω

When LINE selected

Nominal output level: -14 dBV

Maximum output level: +6 dBV

When CAMERA selected

Nominal output level: -34 dBV

Maximum output level: -14 dBV

TC OUT (Tip: timecode, Ring: audio output, Sleeve: GND)

Output impedance: 150 Ω

Output level: 10 mVpp

Format: LTC (SMPTE ST 12-1 compliant)

- 0 dBu = 0.775 Vrms
- 0 dBV = 1 Vrms

Headphone output: headphone jack

Connector: 3.5 mm (1/8") stereo mini jack

Maximum output: 50 mW + 50 mW (THD+N 0.1% or less, into 32 Ω load)

Recommended impedance: 16–600 Ω (Sufficient volume might not be achieved from low-sensitivity headphones even if in the recommended range.)

TC IN/OUT jack

Connector: 3.5 mm (1/8") stereo mini jack

TC IN (Tip: timecode, Ring: –, Sleeve: GND)

Input impedance: 10 k Ω or more

Input level: 0.5–5.0 Vpp

TC OUT (Tip: timecode, Ring: –, Sleeve: GND)

Output impedance: 1.0 k Ω

Output level: 1.8 Vpp

Format: LTC (SMPTE ST 12-1 compliant)

HDMI® IN/OUT ports

Port: Type-A

An ATEN LockPro 2X-EA12 can be used

Version: 2.1, supports 4k/60Hz and 8k/30Hz

USB

Port: USB Type-C (compatible with single screw lock connectors)

Transfer rate: USB 2.0 High Speed

Device class: Mass storage, USB audio 2.0 (USB class compliant)

USB Audio

Sampling frequency: 48/96 kHz

Quantization bit depth: 24-bit/32-bit float

Number of input channels: 6 (output from unit)

Number of output channels: 2 (input to unit)

Bluetooth® adapter connector

Designed for AK-BT2 Bluetooth® adapter

Audio performance

Mic amp EIN (equivalent input noise)

–127 dBu or lower

Frequency response

Input jacks 1–4 to PCM data

When 48 kHz: 20–20 kHz: +0 dB/–0.5 dB

When 96 kHz: 20–40 kHz: +0.5 dB/–1.0 dB

When 192 kHz: 20–60 kHz: +0.5 dB/–3.0 dB

Dynamic range

Input jacks 1–4 (MIC IN) to PCM data (20kHz LPF, A-weighted, JEITA)

133 dB or higher

Total harmonic distortion ratio (THD+N)

Input jacks 1–4 (LINE/MIC IN) to PCM data (1kHz sine wave –2 dBFS input, minimum input level setting, 20kHz LPF, JEITA)

0.01% or less

Note: JEITA indicates conformance to JEITA CP-2150

Recording times (in hours: minutes)

File format (recording setting)		Card capacity	
		256 GB	512 GB
24-bit WAV (2-track recording)	48 kHz	246:52	493:44
24-bit WAV (4-track recording)	48 kHz	123:26	246:52
24-bit WAV (6-track recording)	48 kHz	82:16	164:32
24-bit WAV (2-track recording)	96 kHz	123:26	246:52
24-bit WAV (2-track recording)	192 kHz	61:42	123:24
32-bit float WAV (2-track recording)	48 kHz	185:4	370:8
32-bit float WAV (4-track recording)	48 kHz	92:36	185:12
32-bit float WAV (6-track recording)	48 kHz	61:40	123:20
32-bit float WAV (2-track recording)	96 kHz	92:32	185:4
32-bit float WAV (2-track recording)	192 kHz	46:16	92:32

- The recording times shown above are estimates. They might differ depending on the SD card in use.
- The recording times shown above are not continuous recording times, but rather they are the total possible recording times for the SD card.
- Compared to 2-track recording, the recording times for 4-track and 6-track recording will be 1/2 and 1/3, respectively.

NOTE

- If a file size exceeds 4 GB when recording, the unit will automatically continue recording in a new file (file incrementation).
- When DUAL FORMAT is on, skips in the audio could occur in the MP3 format files when recording files are switched.

20. Specifications

Operating system and other requirements

Check the TASCAM website for the latest information about supported operating systems.

<https://tascam.jp/int/product/fr-av4/spec#osmedia>

CAUTION

Operation with each OS was confirmed with standard system setups that met the following conditions.

Operation is not guaranteed, however, with all systems that meet the following conditions.

Supported operating systems

FR-AV4

Windows*/macOS/iOS/iPadOS/Android

* Operation is not guaranteed using the TASCAM driver with ARM64 CPUs.

TASCAM FR-AV Series Settings Panel

Windows/macOS

TASCAM RECORDER CONNECT

iOS/iPadOS/Android

Audio drivers

Windows: ASIO 2.0, WDM

macOS, iOS/iPadOS: Core Audio

Compatibility has been confirmed, but this does not guarantee operation with all devices.

Other

Power

4 AA batteries (alkaline, NiMH or lithium-ion)

USB bus power from a computer

AC adapter (TASCAM PS-P520U, sold separately)

Power consumption

5.4 W (maximum)

Battery operation time (continuous operation)**Using alkaline batteries (EVOLTA)**

Use conditions	Operation time
Input through input jacks 1–2 Phantom power unused 48kHz STEREO WAV (BWF) 24-bit recording	About 9 hours
Input to input jacks 1–4 Phantom power used (+48V, 3mA×4 load) 48kHz 6ch WAV (BWF) 32-bit float recording Headphones connected HDMI® not connected	About 2:30
Input to input jacks 1–4 Phantom power used (+48V, 3mA×4 load) 48kHz 6ch WAV (BWF) 32-bit float recording Headphones connected HDMI® connected	About 1:30

Using Ni-MH batteries (eneloop)

Use conditions	Operation time
Input through input jacks 1–2 Phantom power unused 48kHz STEREO WAV (BWF) 24-bit recording	About 8 hours
Input to input jacks 1–4 Phantom power used (+48V, 3mA×4 load) 48kHz 6ch WAV (BWF) 32-bit float recording Headphones connected HDMI® not connected	About 3 hours
Input to input jacks 1–4 Phantom power used (+48V, 3mA×4 load) 48kHz 6ch WAV (BWF) 32-bit float recording Headphones connected HDMI® connected	About 2 hours

Using lithium-ion batteries (Energizer Ultimate Lithium)

Use conditions	Operation time
Input through input jacks 1–2 Phantom power unused 48kHz STEREO WAV (BWF) 24-bit recording	About 17 hours
Input to input jacks 1–4 Phantom power used (+48V, 3mA×4 load) 48kHz 6ch WAV (BWF) 32-bit float recording Headphones connected HDMI® not connected	About 6:30
Input to input jacks 1–4 Phantom power used (+48V, 3mA×4 load) 48kHz 6ch WAV (BWF) 32-bit float recording Headphones connected HDMI® connected	About 4 hours

NOTE

When using phantom power, the operation time might be reduced depending on the mics being used.

20. Specifications

Dimensions

184 × 42 × 130 mm (W x H x D, including protrusions)

Weight


756/660 g (with/without batteries)

Operating temperature range

0–40°C

- Illustrations in this manual might differ in part from the actual product.
- Specifications and external appearance might be changed without notification to improve the product.

20-2. Dimensional drawings

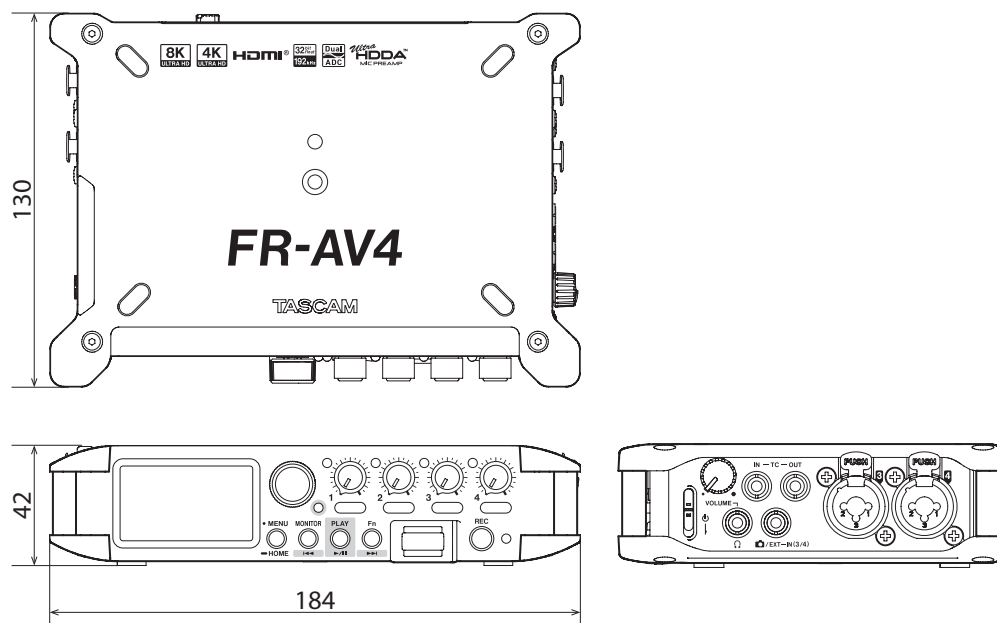

21. Trademarks

- TASCAM is a registered trademark of TEAC Corporation.
- SDXC Logo is a trademark of SD-3C, LLC.



- The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



- Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- Apple, Mac, macOS, iOS, iPad, iPadOS and iTunes are trademarks of Apple Inc. in the United States and other countries.
- App Store is a service mark of Apple Inc.
- Lightning is a trademark of Apple Inc.
- IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.
- Android and Google are trademarks of Google LLC.
- The Bluetooth® word mark and logo are the property of Bluetooth SIG, Inc. and are used by TEAC Corporation with permission.
- ASIO is a trademark and software of Steinberg Media Technologies GmbH.



Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective owners.

TASCAM

TEAC CORPORATION

1-47 Ochiai, Tama-shi, Tokyo 206-8530 Japan

<https://tascam.jp/jp/>

TEAC AMERICA, INC.

10410 Pioneer Blvd., Unit #3, Santa Fe Springs, CA 90670, U.S.A

<https://tascam.com/us/>

TEAC EUROPE GmbH

Bahnstrasse 12, 65205 Wiesbaden-Erbenheim, Germany

<https://www.tascam.eu/de/>

TEAC SALES & TRADING(SHENZHEN) CO., LTD

Room 817, Xinian Center A, Tairan Nine Road West, Shennan Road, Futian District, Shenzhen, Guangdong Province 518040, China

<https://tascam.cn/cn/>

1225.MA-4076B