


IF-E100 Network Settings

OWNER'S MANUAL

V1.1.0

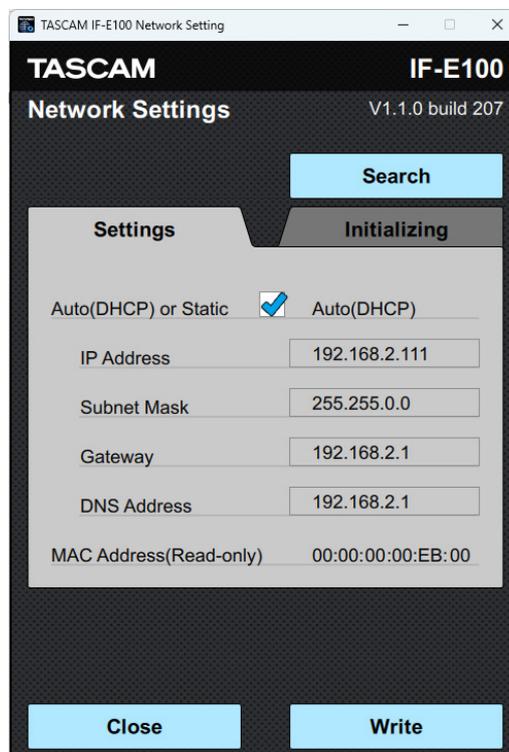

Contents

Conventions used in this manual	2
Trademarks and copyrights	3
Operating system and other requirements	3
Checking the CD-400U firmware version	3
Installing the IF-E100 Network Settings application.....	4
Windows	4
Mac	5
Working with Gatekeeper	6
Connecting to the IF-E100	7
Disabling network interfaces that will not be used	8
Screen overviews	9
Settings page	9
Initializing page	10
Changing network settings	11
Acquiring the IP address automatically	11
Sending the IP address manually	12
Initializing network settings.....	13
Quitting the application	13

TASCAM IF-E100 Network Settings is an application that can be used from a Windows/Mac web browser to make network settings and check the status of a TASCAM CD-400U/MP-800U that has an IF-E100 Internet board installed.

Before using this application, read the Software Use License Agreement and agree to its terms.

Conventions used in this manual

In this manual, we use the following conventions:

- When we show characters that appear on the computer display, the typeface looks like this: *OK*.
- As necessary, additional information is provided under TIP, NOTE and CAUTION headings.

TIP

These are tips about how to use the software.

NOTE

These provide additional explanations and describe special cases.

ATTENTION

Failure to follow these instructions could result in damage to equipment or lost data, for example.

CAUTION

Failure to follow these instructions could result in injury.

Trademarks and copyrights

- TASCAM is a registered trademark of TEAC Corporation.
- Apple, Mac, Mac OS and macOS are trademarks of Apple Inc. in the United States and other countries
- Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective owners.

Operating system and other requirements

Supported operating systems

Windows/macOS

Check the TASCAM website for the latest information about supported operating systems.

<https://tascam.jp/int/product/if-e100/support>

ATTENTION

Operation of this unit was confirmed using standard computers that meet the above requirements.

This does not guarantee operation with all computers that meet the above requirements. Even computers that meet the same system requirements might have processing capabilities that differ according to their settings and other operating conditions.

Checking the CD-400U firmware version


To use an IF-E100 with a CD-400U, the CD-400U firmware version must be 1.10 or later.

- * We recommend that you always use the latest firmware for the CD-400U unit. For information about the latest firmware, visit the TEAC Global Site (<https://teac-global.com/>).


Installing the IF-E100 Network Settings application

Windows


1. Connect the computer you are using to the Internet.
2. Download the IF-E100 Network Settings application from the TEAC Global Site (<https://teac-global.com>).
 - Be aware that transmission charges related to using the Internet connection are your responsibility.
3. Decompress the file after downloading, and double-click the TASCAM_IF-E100_NetworkSettings_ver---_win.exe file to launch the installer (“---” is the version).
When the installer language selection screen opens, select the language you want and click the “OK” button.

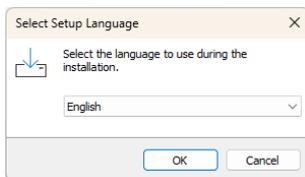


4. The software license agreement screen opens. Select “I accept the agreement” to agree to the license, and click “Next” to continue.

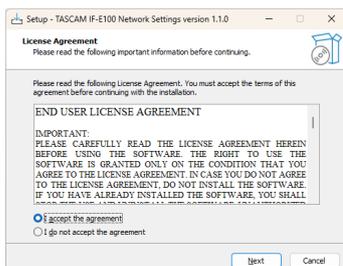


5. The shortcut creation screen opens. Put a check (✓) in the box next to “Create a desktop icon” to create a shortcut on the desktop, and click “Next” to continue.

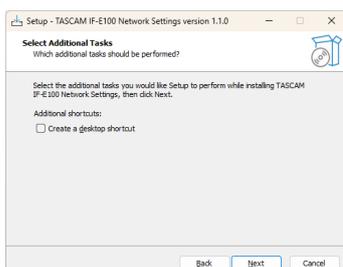


6. The installation confirmation screen opens. Confirm the installation details, and click the “Install” button.

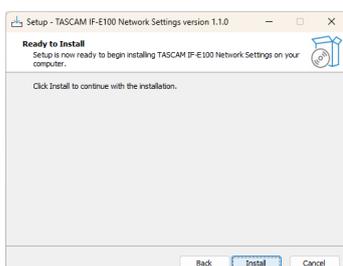

7. The installation progress screen opens. To cancel installation at this time, click the “Cancel” button.

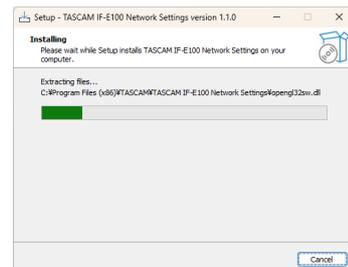

8. The installation completion screen opens. To launch IF-E100 Network Settings immediately, click the “Finish” button. To launch IF-E100 Network Settings later, remove the check (✓) from the box next to “Launch TASCAM IF-E100 Network Settings”, and then click the “Finish” button.

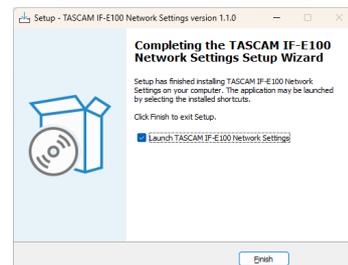

This completes installation of the software.

Mac

NOTE

While installing the Mac IF-E100 Network Settings application, a warning message like this might appear: **"TASCAM_IF-E100NetworkSettings.pkg"** can't be opened because it was not downloaded from the Mac App Store. If a message like this appears, follow the instructions in Working with Gatekeeper page 6 and then proceed with the installation.

1. Download the latest IF-E100 Network Settings Mac application from the TEAC Global Site (<https://teac-global.com/>) and save it on the computer to be used with the unit.
2. Double-click **"TASCAM_IF-E100 Network Settings_installer_v---.dmg"** ("---" is the version number), which is the saved disk image file for the Mac TASCAM IF-E100 Network Settings application, and double-click **"TASCAM_IF-E100NetworkSettings.pkg"** inside the folder that opens.




NOTE

Depending on the computer's settings, the downloaded zip file might not have opened automatically. In this case, open the zip file first and then double-click the disk image file.


3. When the installer starts, click the **"Continue"** button.



4. Select the desired language and confirm the contents of the user license agreement. Then, click the **"Continue"** button.

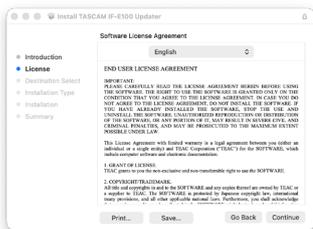


5. If you agree to the contents, click **"Agree"**.

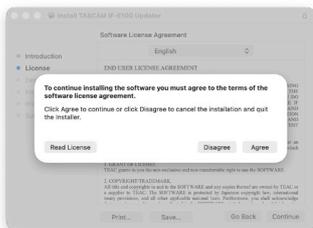

6. Next, click the **"Install"** button to start installation.



7. The following screen appears when installation has completed. Click the **"Close"** button.

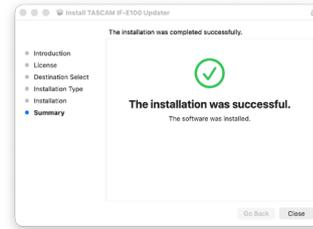


This quits the installer.

Working with Gatekeeper

When using Mac OS X, depending on the Gatekeeper security function setting, a warning message might appear during installation. The solution depends on the warning message shown. See the following explanations for details.


When the Gatekeeper setting is “Allow applications downloaded from: the Mac App Store”

The following security warning might be shown: *“TASCAM_IF-E100NetworkSettings.pkg’ can’t be opened because it was not downloaded from the Mac App Store.”*




In this case, click the “OK” button to close the message. Then, control-click (or right-click) the file and click “Open” in the menu.

When the *“TASCAM_IF-E100NetworkSettings.pkg’ can’t be opened because it was not downloaded from the Mac App Store. Are you sure you want to open it?”* security warning message appears, click the “Open” button.



This warning message might also appear when the Gatekeeper setting is something other than *“Allow applications downloaded from: Mac App Store.”*


The following security warning might be shown: *“TASCAM_IF-E100NetworkSettings.pkg’ can’t be opened because it was not downloaded from the Mac App Store.”*



In this case, copy the file from the folder where it is to the desktop or another folder, and then open it. Alternatively, change the Gatekeeper settings to *“Allow apps downloaded from: App Store and identified developers”* and try opening it again.

Changing the Gatekeeper setting

The Gatekeeper setting can be changed using the *“Allow apps downloaded from:”* item on the *“General”* page of the *“Security & Privacy”* pane of the System Preferences. To change this, you must click the lock icon (🔒) at the bottom left and enter a password to unlock the settings.

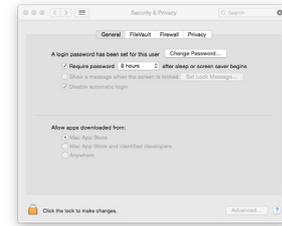

This setting will lock again when you click the 🔒 button or type command-Q to close the System Preferences or when you click *“Show All”* to close the open pane.

ATTENTION

Changing the Gatekeeper setting could result in security risks.

If you changed the Gatekeeper setting to decrease security (use one of the lower settings), set it back to the original setting after installing the application.


Connecting to the IF-E100

Connection with the IF-E100 is necessary to change its network settings using IF-E100 Network Settings.

1. On the same network, connect the unit that has the IF-E100 installed and a computer that has IF-E100 Network Settings installed.


NOTE

- This application can only set one unit. If multiple IF-E100 cards are connected on the same network, turn on the power of only the unit with the IF-E100 that you want to set. Turn off the other units.
 - If the computer being used has multiple network interfaces, disable the interfaces that are not being used to connect to the installed unit.
 - This software can be used even if the IP address of the IF-E100 (installed unit) is not set. (see “Disabling network interfaces that will not be used” on page 8)
2. Turn the power on for the unit with the IF-E100 installed.
 3. Click the TASCAM IF-E100 Network Settings icon to launch the application.

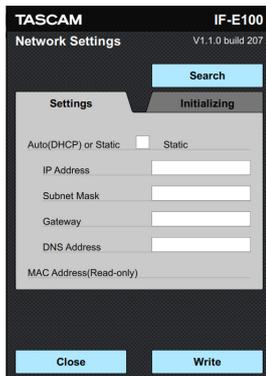


An IF-E100 to be set has not been found, so “IP Address” and other fields will be blank.

4. Click the **Search** button to search for an IF-E100 on the network.
“Working...” appears while searching.

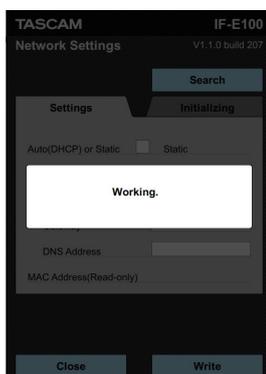

5. The **IP Address**, **Subnet Mask**, **Gateway**, **DNS** and **MAC address** settings are shown.

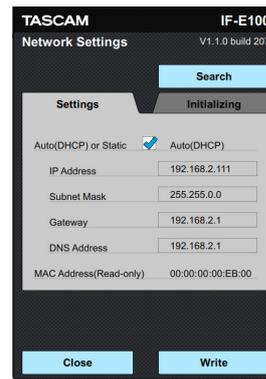

The IF-E100 to be set has been found and can now be set.

NOTE


If one of the following messages appears, the IF-E100 has not been found properly. Check the set up, make necessary adjustments and click **Search** again to search for the IF-E100.

Message	Meaning
Device not found	An IF-E100 could not be found on the network. Confirm that the power is on for the installed unit and that it is connected correctly.
No valid active connections	No valid network could be found. The computer that you are using might not be properly connected to the network.
Multiple devices found	Multiple IF-E100 cards were found. IF-E100 Network Settings cannot connect to multiple units at the same time. Turn off the power for other units with IF-E100 cards installed so only the IF-E100 to be set is on.

Disabling network interfaces that will not be used

Windows


Select Start → Settings → Network & Internet → Advanced Network Settings to open the advanced network settings. To disable a network connection, click the Disable button next to the desired network adapter.

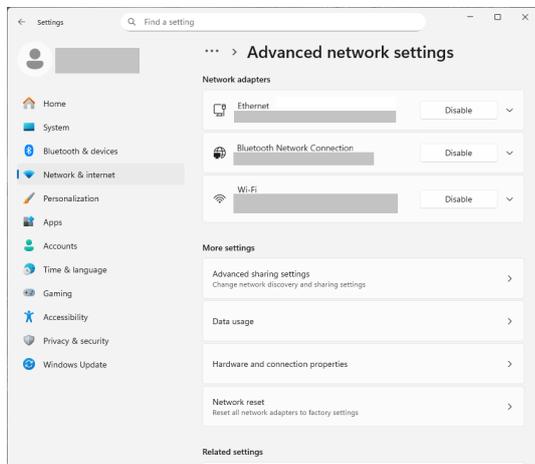

Mac


To disable Ethernet

Select System Preferences (System Settings) → Network → Ethernet, and click "Make Inactive."

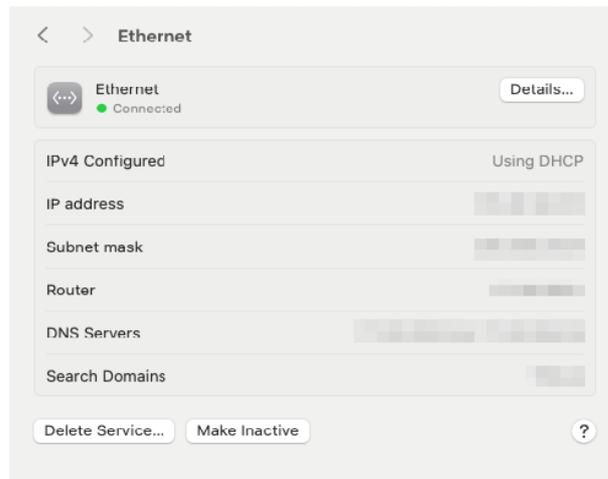


To disable Wi-Fi

Select System Preferences (System Settings) → Network → Wi-Fi, and turn off Wi-Fi.

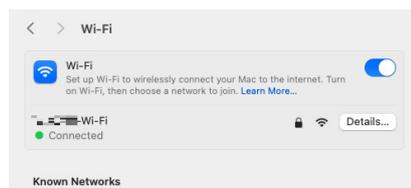

Screen overviews

Settings page

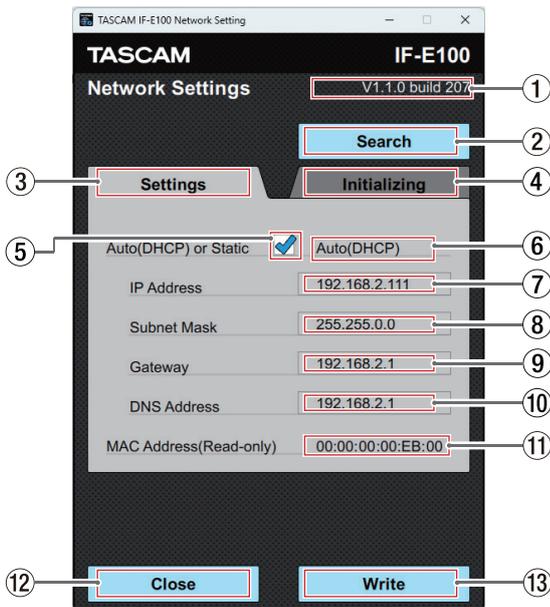

① Version

This shows the IF-E100 Network Settings version.

② Search button

Click the Search button to search for an IF-E100 on the network.

③ Settings tab

This is the open page.

④ Initializing tab

Click this to open the *Initializing* page.

⑤ Auto (DHCP) or Static check box

This changes the IP mode.

	IP mode
✓	Auto (DHCP)
	Static

⑥ IP mode

This shows the current IP mode. Use the ⑤ *Auto (DHCP) or Static* check box to change the IP mode.

⑦ IP Address

The current IP address is shown when the IP mode is *Auto (DHCP)*. This cannot be changed.
The IP address can be changed when the IP mode is *Static*.

⑧ Subnet Mask

The current Subnet Mask setting is shown when the IP mode is *Auto (DHCP)*. This cannot be changed.
The Subnet Mask setting can be changed when the IP mode is *Static*.

⑨ Gateway

The current Gateway setting is shown when the IP mode is *Auto (DHCP)*. This cannot be changed.
The Gateway setting can be changed when the IP mode is *Static*.

⑩ DNS Address

The current DNS address is shown when the IP mode is *Auto (DHCP)*. This cannot be changed.
The DNS address can be changed when the IP mode is *Static*.

⑪ MAC Address (Read-only)

This shows the MAC address of the IF-E100.


⑫ Close button

Click this button to close IF-E100 Network Settings.

⑬ Write button

Click this button to write the settings.

Initializing page

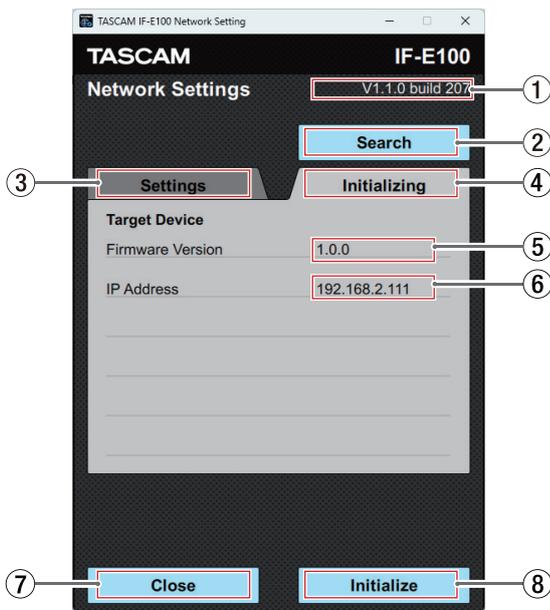

- ① **Version**
This shows the IF-E100 Network Settings version.
- ② **Search button**
Click this button to search for an IF-E100 on the network.
- ③ **Settings tab**
Click this to open the *Settings* page.
- ④ **Initializing tab**
This is the open page.
- ⑤ **Firmware Version**
This shows the firmware version of the connected IF-E100.
- ⑥ **IP Address**
This shows the IP address of the connected IF-E100.
The IP address cannot be changed on the screen.
- ⑦ **Close button**
Click this button to close IF-E100 Network Settings.
- ⑧ **Initialize button**
Click this button to initialize the settings of the IF-E100.
The password will be replaced with a unique password.
Check the Password item on the main unit to confirm the change.

Changing network settings

Acquiring the IP address automatically

Set the IP mode to **“Auto (DHCP)”** to acquire the IP address automatically. The default IP mode is **“Auto (DHCP)”**. The IP mode will be Auto (DHCP) if a check mark (✓) is in the **Auto (DHCP) or Static** check box on the **Settings** page and the IP mode is shown as **“Auto (DHCP)”**.

NOTE

A DHCP server is necessary to use with the IP mode sets to **“Auto (DHCP)”**.

If there is no check mark (✓) in the **Auto (DHCP) or Static** check box on the **Settings** page and the IP mode is shown as **“Static”**, follow these procedures to change it to **“Auto (DHCP)”**.


1. Click the **Settings** tab to open the **Settings** page.



2. Click the **Auto (DHCP) or Static** check box to put a check mark (✓) in it.




3. Click the **Write** button to save the settings.

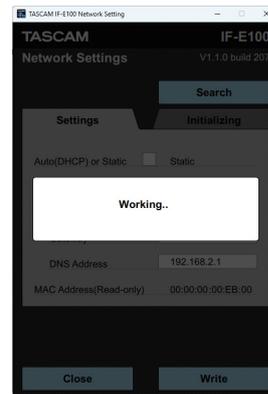


“Working...” appears while in progress.

4. When **“Completed.”** appears, click the **Close** button.

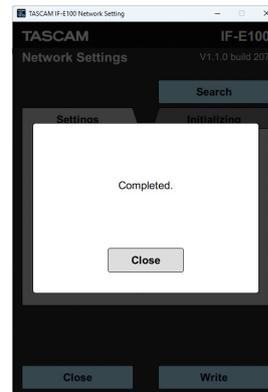

5. The **Settings** page will be shown.

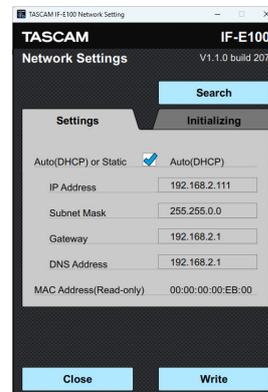

Confirm that the **Auto (DHCP) or Static** check box has a check mark (✓) in it and that **“Auto (DHCP)”** is shown.


Sending the IP address manually

Set the IP mode to **“Static”** to manually set an IP address and use it. The default IP mode is **“Auto (DHCP)”**.


The IP mode will be Static if a check mark (✓) is not in the **Auto (DHCP) or Static** check box on the **Settings** page and the IP mode is shown as **“Static”**.

If there is a check mark (✓) in the **Auto (DHCP) or Static** check box on the **Settings** page and the IP mode is shown as **“Auto (DHCP)”**, follow these procedures to change it to **“Static”**.


1. Click the **Settings** tab to open the **Settings** page.

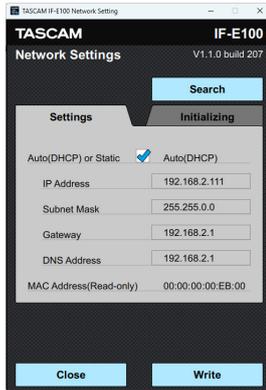

2. Click the **Auto (DHCP) or Static** check box to remove the check mark (✓) in it.
3. Input the IP Address, Subnet Mask, Gateway and DNS Address.

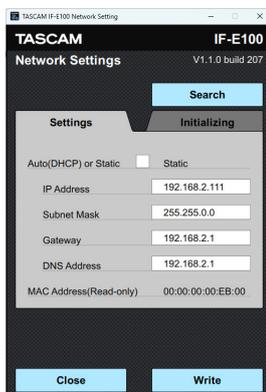


4. Click the **Write** button to save the settings.

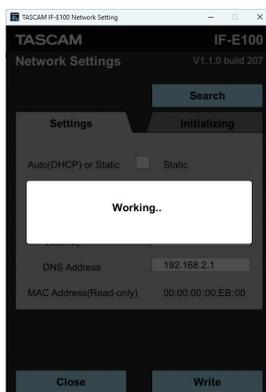


“Working..” appears while in progress.

5. When **“Completed.”** appears, click the **Close** button.

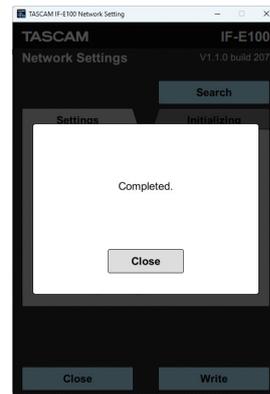

6. The **Settings** page will be shown.

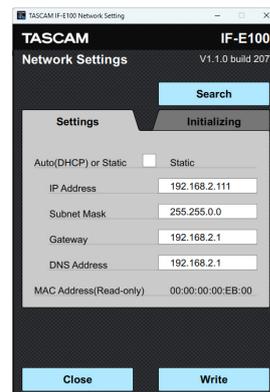

Confirm that the **Auto (DHCP) or Static** check box does not have a check mark (✓) in it and that **“Static”** is shown.


Initializing network settings

The current settings can be reset to defaults.
The password will also be initialized to a unique one.


NOTE

Check the initialized password on the unit with the installed IF-E100.

1. Click the *Initializing* tab to open the *Initializing* page.

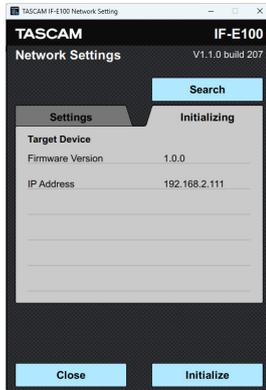


2. Click the *Initialize* button.

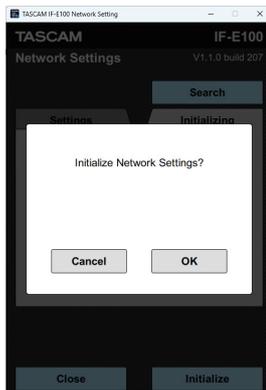

Initialize Network Settings? will appear.

3. Click the *OK* button.

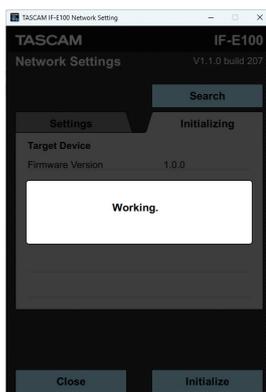


Working... appears while in progress.


NOTE

Click the *Cancel* button to return to the *Initializing* page without initializing.

4. When *Completed.* appears, click the *Close* button.

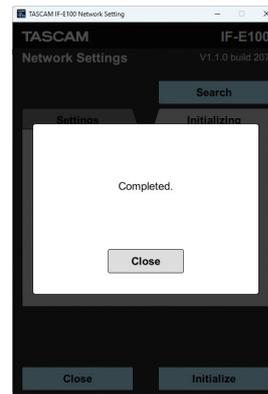

5. The *Initializing* page will be shown.

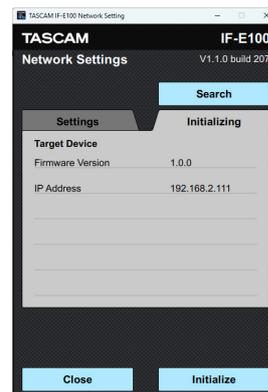

Quitting the application

Click the *Close* button to quit the application.

NOTE

If the application is quit before writing, changes will not be made to the IF-E100.

TASCAM

TEAC CORPORATION

1-47 Ochiai, Tama-shi, Tokyo 206-8530 Japan

<https://tascam.jp/int/>

TEAC AMERICA, INC.

14525 Valley View Ave., Suite I, Santa Fe Springs, California 90670, U.S.A

<https://tascam.com/us/>

TEAC EUROPE GmbH

Bahnstrasse 12, 65205 Wiesbaden-Erbenheim, Germany

<https://www.tascam.eu/de/>

TEAC SALES & TRADING(SHENZHEN) CO., LTD

Room 817, Xinian Center A, Tairan Nine Road West, Shennan Road, Futian District, Shenzhen, Guangdong Province 518040, China

<https://tascam.cn/cn/>

0226.MA-2572B